
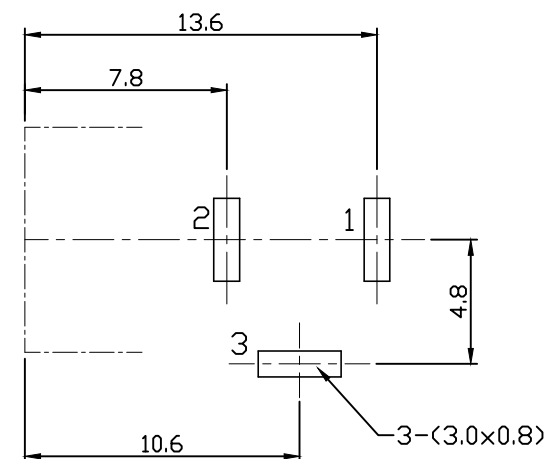
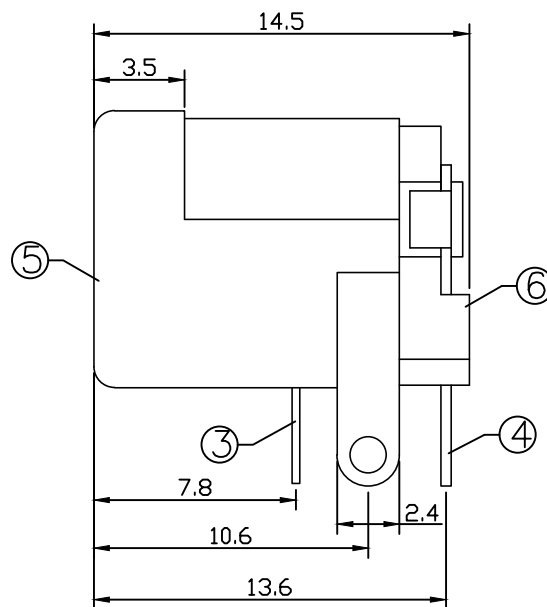


✱ Rated voltage/ Rated current : 12V/5A

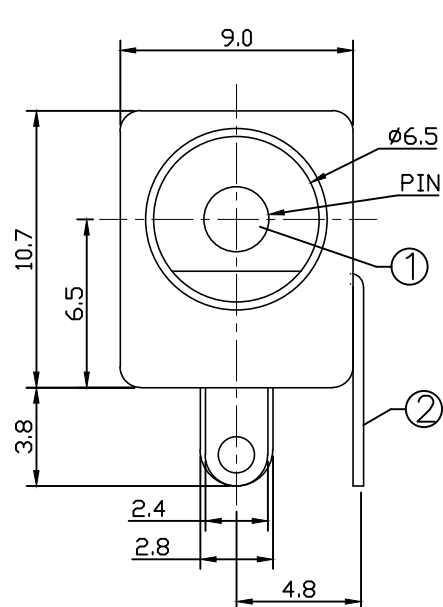

T:1.6 Dimensions of PC board holes  
Tolerance :  $\pm 0.05$  (Printed-top view)

| CAT. NO.   | PIN        | SCHEMATIC |
|------------|------------|-----------|
| DCJ-R5A-25 | $\phi 2.5$ |           |

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:  $\pm 0.3$

|     |             |     |                   |                |
|-----|-------------|-----|-------------------|----------------|
| 6   | COVER       | 1   | PBT 4815          | UL-94V0(BLACK) |
| 5   | HOUSING     | 1   | PBT 4815          | UL-94V0(BLACK) |
| 4   | FLAT PIECE  | 1   | C2680 t=0.4       | Sn PLATED      |
| 3   | SPRING      | 1   | C5191 t=0.3       | Sn PLATED      |
| 2   | CURVE PIECE | 1   | C2680 t=0.4       | Sn PLATED      |
| 1   | PIN         | 1   | H59(COPPER ALLOY) | Ni PLATED      |
| LTR | PART NAME   | QTY | MATERIAL          | REMARK         |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X,  $\pm$   
.X  $\pm$   
.XX  $\pm$   
.XXX  $\pm$   
ANG  $\pm$



ORDER INFORMATION

DCJ-R5A-25-LF  
SERIES T LEADFREE  
5A 2.50  
DIP 90°

DESCRIPTION: DC POWER JACK