

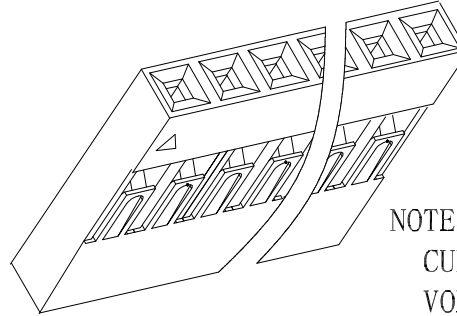


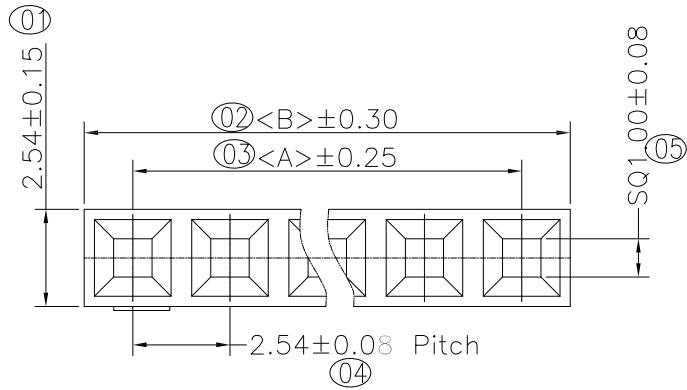

NOTES:

CURRENT RATING: 3A AC/DC.
VOLTAGE RATING: 250V AC/DC.
TEMPERATURE RANGE: -25° C~+85° C.
CONTACT RESISTANCE: 20mΩ MAX.
INSULATION RESISTANCE: 1000MΩ MIN.
WITHSTANDING VOLTAGE: 800V AC/MINUTE.

PBT+15%GF UL 94V-0

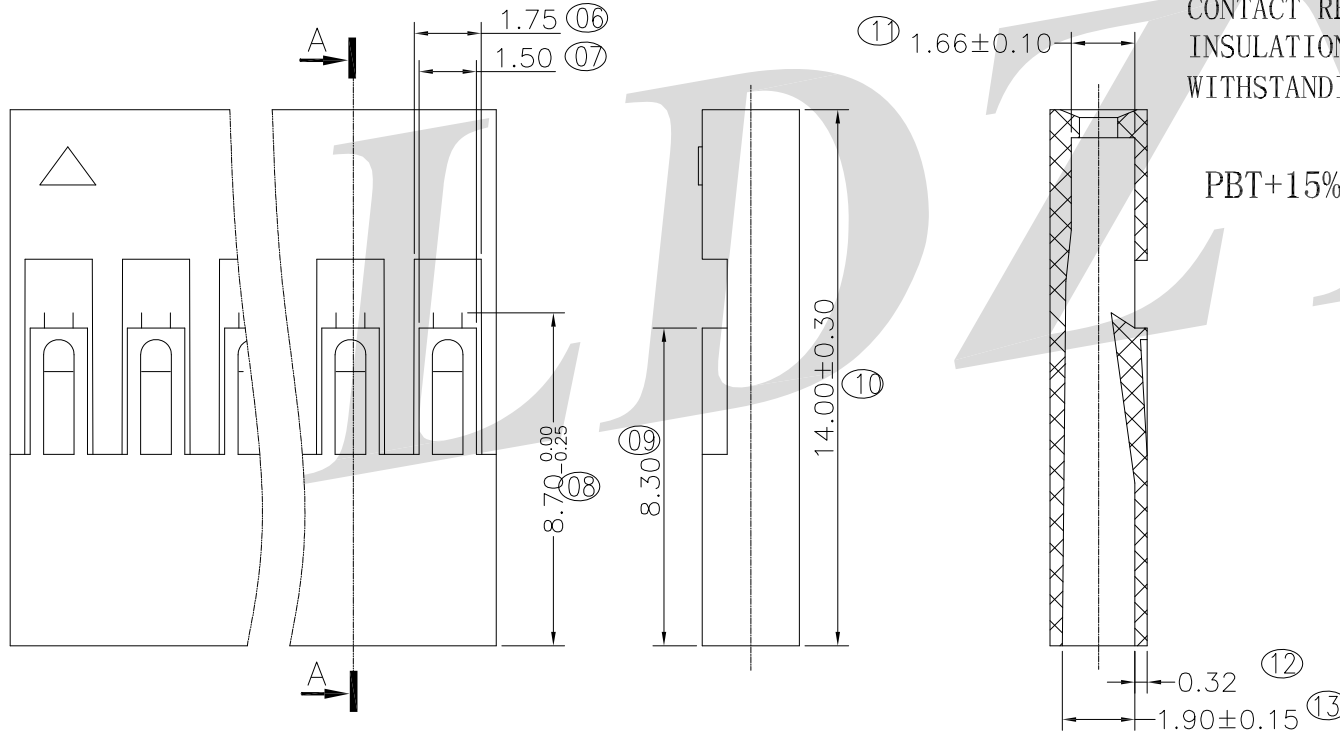

SECTION: (A-A)

PIN	Dimension	
	A	B
01	—	2.54
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.60

						一般公差 GENERAL TOLERANCE	 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A2545H-NP-P0BK-A			
						. X ±0.3					品名 TITLE			
						. XX ±0.2					2.54mm Crimp Style connectors			
						. XXX ±0.1					核准 APPD	审核 CHK	绘图 DR	日期 DATA
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT 	Rodney	兰 雄	潘昌文	2022/02/12	单位 UNIT MM	比例 SCALE 1/1	图号 NUMBER LDZY-8161	版次 REV A