
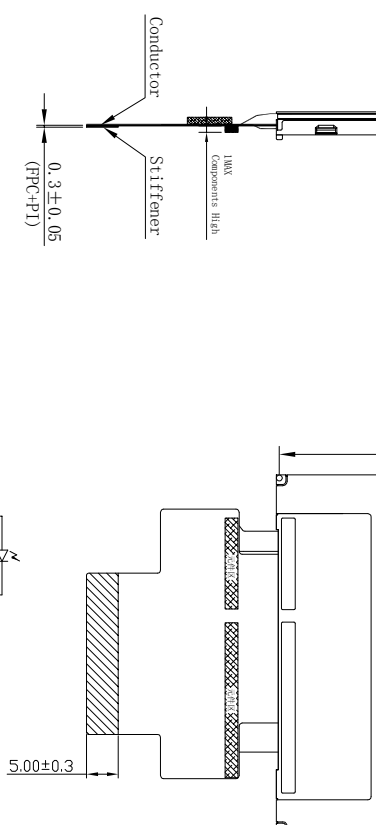
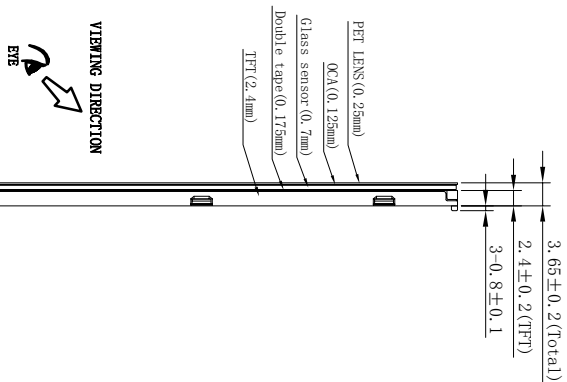


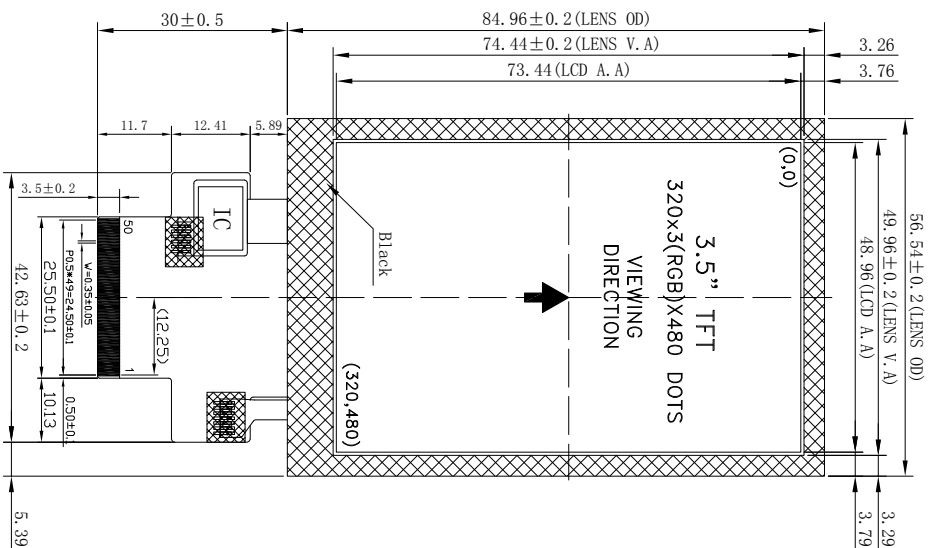

PN1	SYMBOL
1	LEFA
2	LEK
3	LEAK
4	NC
5	NC
6	NC
7	IM0
8	IM1
9	IM2
10	/RESET
11	/VSYNC
12	HSYNC
13	DOTCLK
14	DE
15	DB17
16	DB16
17	DB15
18	DB14
19	DB13
20	DB12
21	DB11
22	DB10
23	DB9
24	DB8
25	DB7
26	DB6
27	DB5
28	DB4
29	DB3
30	DB2
31	DB1
32	DB0
33	SDD
34	SDD
35	/RD
36	/VRS_SCL
37	RS
38	/CS
39	TE
40	IOVCC
41	IOVCC
42	VCI
43	GND
44	XR_CTPSCH
45	YD_CTPSDA
46	XL_CTPRDA
47	YU_CTPRCE
48	GND
49	GND
50	GND

CTP NOTE:

1. PET+ITO Glass+PPC+adhesive
ITO GLASS: 0.7mm
PET LENS: 0.25mm
IC: F16236
2. Operation Voltage: 2.8V-3.3 V
3. Transmittance: $\geq 83\%$
4. The cover hardness: 3H

BL CIRCUIT DIAGRAM
VF=3.2V IF=120mA
Luminance:280cd/m²(Typ.)

D

NOTES:

1. DISPLAY TYPE: 3.5" TFT
2. VIEWING DIRECTION: 6:00

GRAY SCALE INVERSION DIRECTION: 12:00

3. LCD DRIVE IC: IL19488
4. POLARIZER MODE: TRANSMISSIVE/POSITIVE

OPERATING TEMP. -20° C ~ +70° C

GRAY SCLAE INVERSION DIERCTION: 12:00

88

/POSITIVE

5. OPERATING TEMP: -20°C to $+70^{\circ}\text{C}$

6. STORAGE TEMP: -30°C ~ $+80^{\circ}\text{C}$

7. UNMARKER TOLERANCE: ± 0.20

8. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: ROHS

1


2

3

4

5

9

		MODEL	LTK350HV37A		LEADTEK COMPANY LIMITED						
		DRAWING	LGZ	DATE						2019.07.25	
		CHECK		DATE							
V0	NEW	2019.07.25	APPROVE	DATE							
REV.	CONTENT	DATA	TOLERANCE	.X ± 0.3 , .XX ± 0.2		SCALE	PAGE	1 of 1	UNIT	mm	
									SIZE	A4	(3)

LEADTEK COMPANY LIMITED

