

1

2

3

4

5

6

7

8

9

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃

Contact Material:Brass



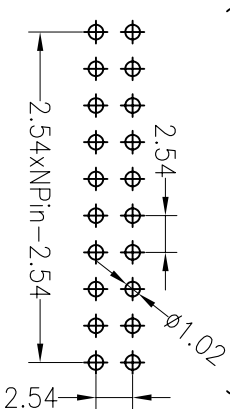
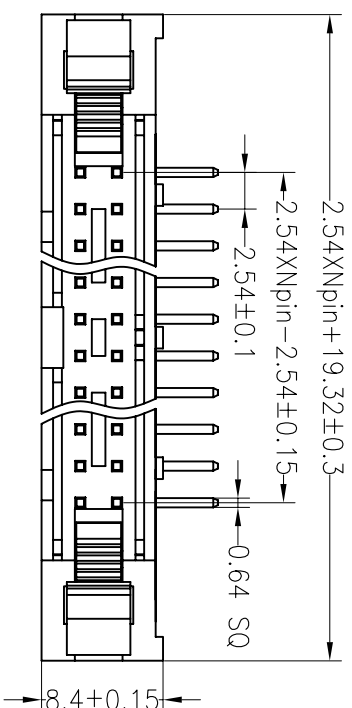
Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 180℃ for 30-60 seconds

(200℃ for 10 seconds)

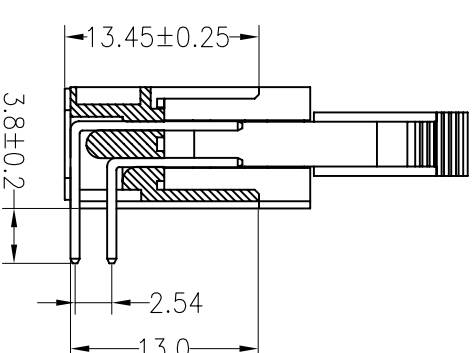
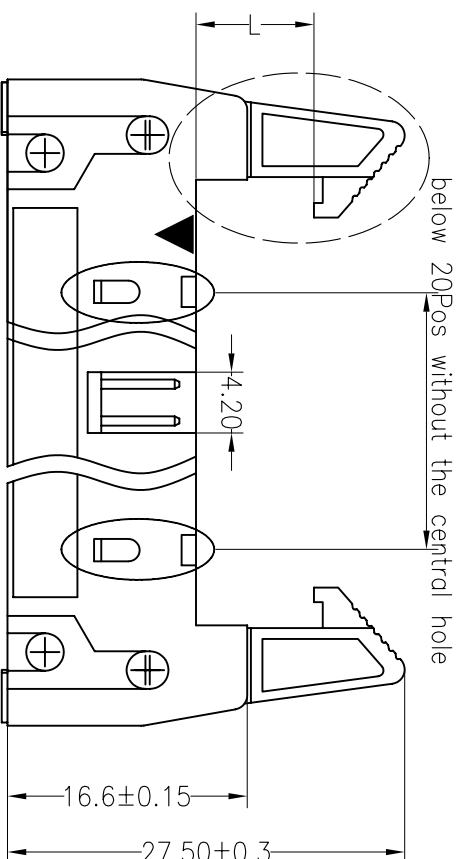
Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

below 20Pos without the central hole

Ordering Information

3310 XX R G0 X X X X 1

No. of Pins Per Row	Contact Plating	Insulator Material Option	Color Type	Latch Type	Packing
6-64	G0:Gold Flash	A=BK-PBT	B=Black	L=Long Latch	A=Tray
	G2:5U" Gold	B=BK-PA66	G=Grey	S=Short Latch	T=Tube
	G3:10U" Gold	C=BK-PA6T		N=Without Latch	
	G4:15U" Gold	D=BK-PA46			
	G5:30U" Gold	F=BK-LCP			
	S0:Gold Flash/Tin				
	SN:Tin				



REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YTYuSheng	12.03.28	SCALE		FIT	PART NO.	TITLE:	2.54 ejector header 2xNpin 90°
				DIM	TOL				UNIT	mm				
A0	2012.03.28	NEW DRAWING		X.XX	±0.30				SIZE	A4	1/1	3310XXRG0XXXX1		
				X.XX	±0.20	CHECK			SHEET					
				X.XXX	±0.10				PROJ.					
1				Angle	±3°	APPROVE								

JIN 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992