

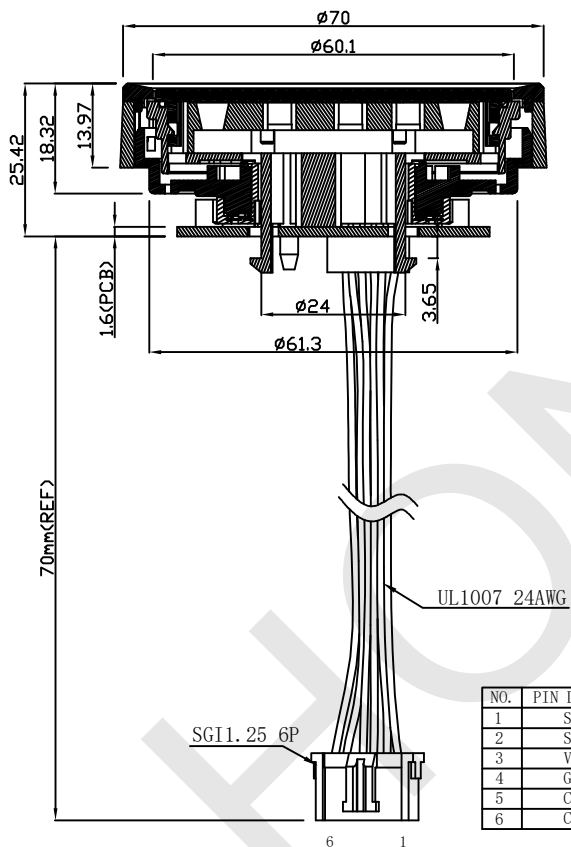
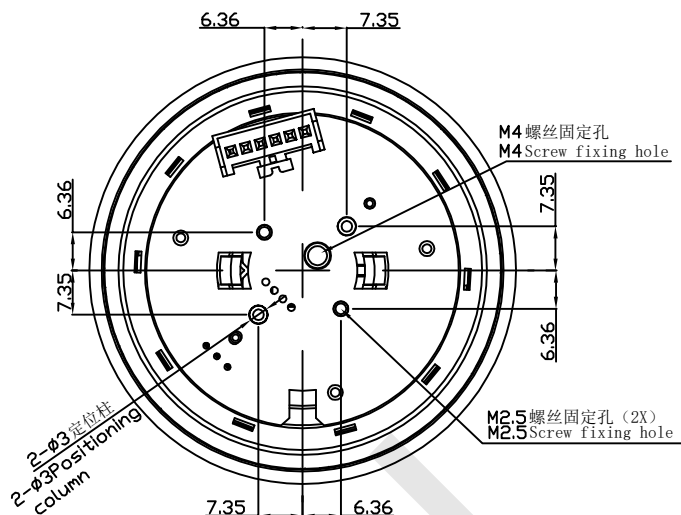
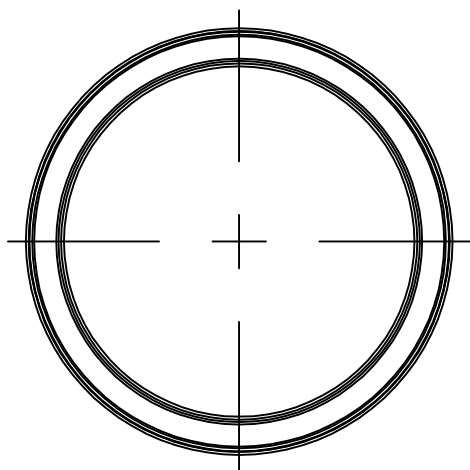


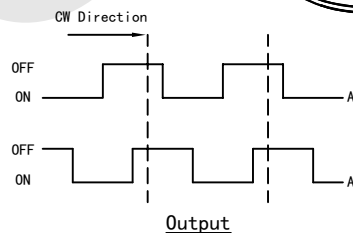

NO.	PIN	DEFINE
1		SDA
2		SCL
3		VCC
4		GND
5		CODEB
6		CODEA

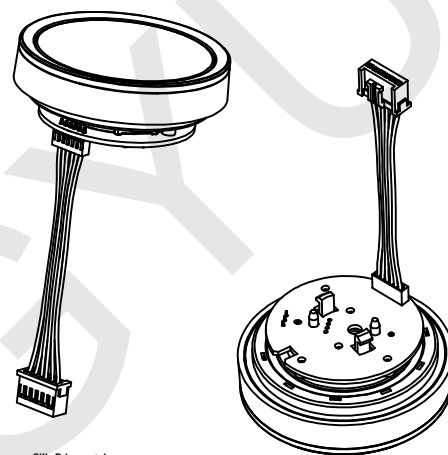

技术说明 Technical description: :

- 外观无明显刮痕、毛刺、熔接痕等现象;
The appearance has no obvious scratches, burrs, weld marks and other phenomena;
- PCB卡槽不能有UV胶;
The PCB card slot can not have UV glue;
- 旋钮旋转时无卡涩现象;
Knob rotation without not smooth phenomenon;
- 编码器机械寿命2.5万次;
The mechanical life of encoder is 25,000 times;
- 旋钮扭矩450±200gf.cm;
Knob torque is 450±200gf.cm;
- 脉冲数14个;
14 pulses;
- 定位数及位置14点定位间隔角度25.71±2°;
Positioning number and positions: 14 points and positioning interval angle is 25.71±2°

		MODEL	H70-B-14P				惠州市宏宇高科电子有限公司		
		DWG NO	TZ-H70-B-001				Huizhou City HongYu High-Tech Electronics Co., Ltd.		
				TOL. UNLESS OTHERWISE SPEC	SCALE		DRAW	CHKD	APPD
				BASIC DIMENSIONS	TOL.	/			
				<10	±0.3	UNIT			
				10~100	±0.5	mm			
				>100	±0.8	VERSION			
	DATE	REVISION	DESIGN	ANGLE	±5°	A0			