
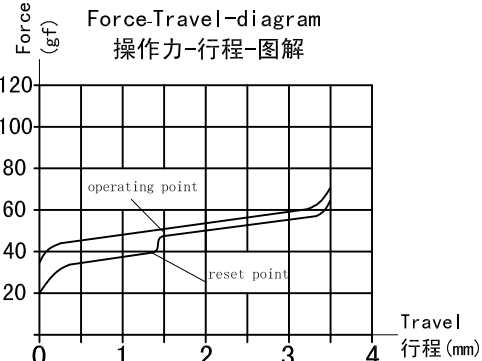


ABIDE BY ROHS


linear feel-Red shaft

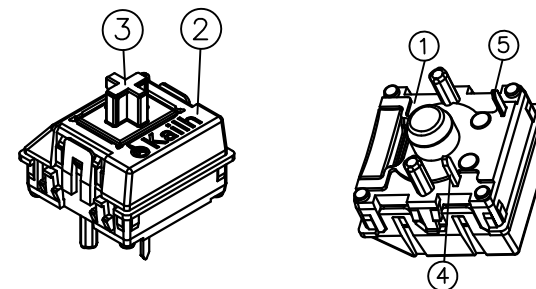


■ Specification :

- 1. Rating:
Voltage : 12V AC/DC max., 2V DC min.
Current: 10mA AC/DC max., 10 μ A DC min.
- 2. Contact Resistance : 200m Ω Max
- 3. Insulation Resistance : 100M Ω at DC500V
- 4. Withstand Voltage : AC100V (50-60Hz) for 1 minute
- 5. Bounce Time: ≤ 5 msec (at 16 in/sec. actuation speed)
- 6. Operation Force : 45 ± 15 gf (35-70gf for total travel)
- 7. Pretravel: 1.5 ± 0.5 mm
- 8. Total travel: 3.5 ± 0.5 mm
- 9. Operating Life : 50,000,000 Cycles
- 10. For assembly more than 1X1.5 keycap, it need install a equalizing bar.

■ SWITCH FUNCTION



⑤	Terminal B	——	1	Copper Alloy	——	——
④	Terminal A	——	1	Copper Alloy	——	——
③	Keystroke	——	1	POM	Nature	UL94HB
②	Cover	——	1	PC	——	——
①	Base	——	1	Nylon	——	——
ITEM	PART NAME	TER'NO	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	DONGGUAN CITY KAIHUA ELECTRONICS CO.,LTD		
DRAWN		Luohengjun	2016-9-8	 Kailh		
CHECKED				TITLE:	PG1280 KeySwitches with LED	
APPROVALS				PART NO.	CPG128001S01	
TOLERANCES ARE		30<L	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10<L≤30	±0.20			
		5<L≤10	±0.15			
		L≤5	±0.10			
		±2'		DRAWING NO.	SHEET 1 OF 2	

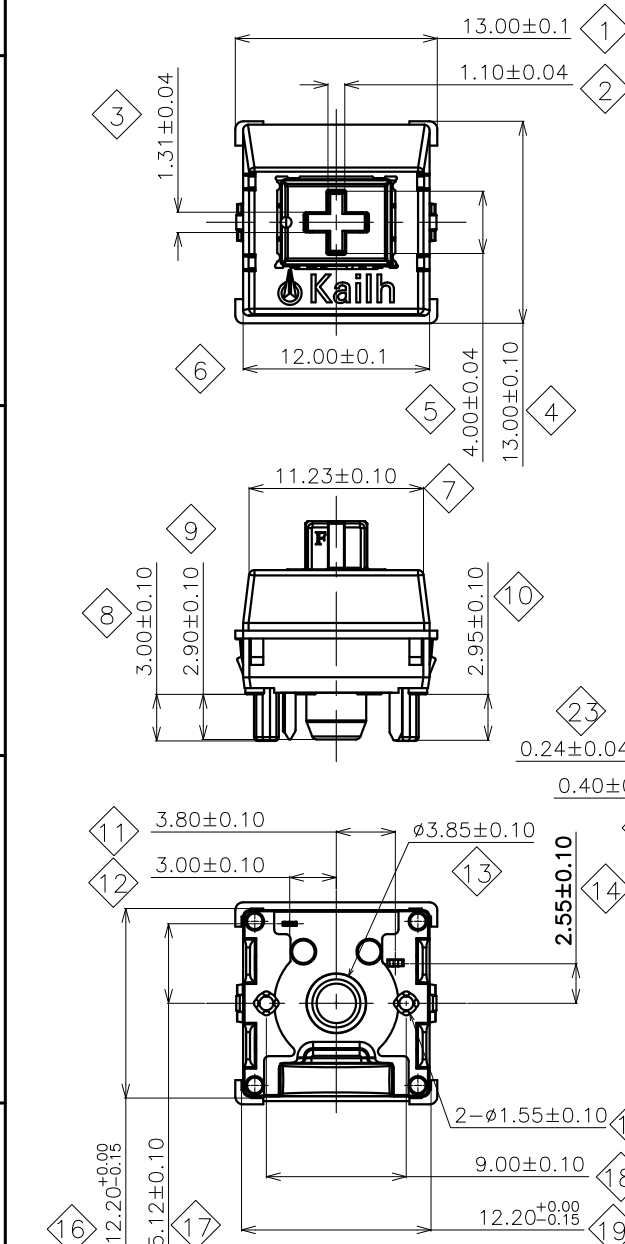

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			