REV	ECO	DESCRIPTION	DATE
A	E	ORIGIN	2010.03.03

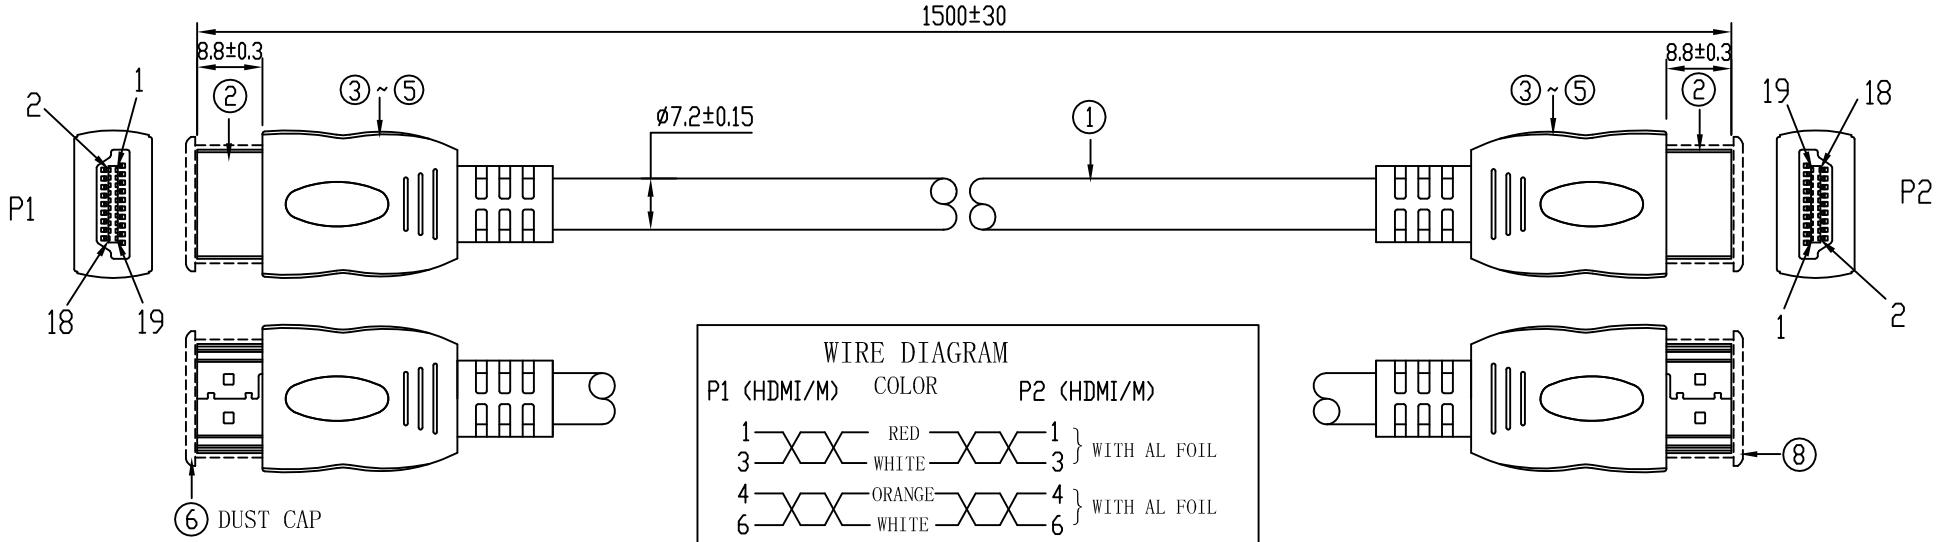

WIRE DIAGRAM

P1 (HDMI/M)	COLOR	P2 (HDMI/M)	
1	RED	1	WITH AL FOIL
3	WHITE	3	
4	ORANGE	4	WITH AL FOIL
6	WHITE	6	
7	YELLOW	7	WITH AL FOIL
9	WHITE	9	
10	BLUE	10	WITH AL FOIL
12	WHITE	12	
13	RED	13	
15	GREEN	15	WITHOUT AL FOIL
16	WHITE	16	
17	DRAIN WIRE	17	
18	PURPLE	18	
19	BLUE	19	

ELECTRONIC TEST:

1. 100% OPEN&SHORT TEST
2. CONNECTION RESISTANCE:3.5 OHMS(MAX)
3. INSULATION RESISTANCE:10M OHMS/DC300V/10ms



PACKING METHOD

Item	Name	SHH P/N	Description	Q'TY	Unit	Remark
7	TIE	MRBW28D45C05	BLACK TWIST TIE OD:4.5MM	2*100	mm	
6	DUST CAP	MHDMIFCG0001	DUST CAP MATERIAL:PE	2	pcs	
5	PVC	PVCU451-001	BLACK PVC FOR OUTER MOLDING	9	9	
4	PE	PEZU45B-001	LDPE FOR INNER MOLDING	4.0	9	
3	TUBE	MHT007ZZBCBU	Φ0.7mm BLACK HEAT SHRINKABLE TUBE	2*12	mm	
2	CONN	HDMIT19PDOLD	HDMI A TYPE PLUG GOLD~PLATED	2	pcs	
1	WIRE	WUHNN100-33A	UL20276 (#33*1P+AL)*4+#33*1P+#33*3C+FEA OD: Φ7.2mm BLACK JACKET	1500	mm	

Tolerance	
	mm
X.	±5.00
.X	±0.50
.XX	±0.10
.XXX	±0.05

DRAW:

CHECK:

APPROVED:

Guangdong SIPU Industrial Co,.Ltd.
http://www.jysipu.com

DESCRIPTION: HDMI A M/M BLACK CABLE L=1500mm

CUS.NAME:

CUS. P/N: HMHM01510

SHH P/N: C320-HMHM01510 SHEET: 1 OF 1

DRAWING NO.: S320J-0132 REV: A

SCALE:~~ UNIT:mm DATE:2010.03.03