



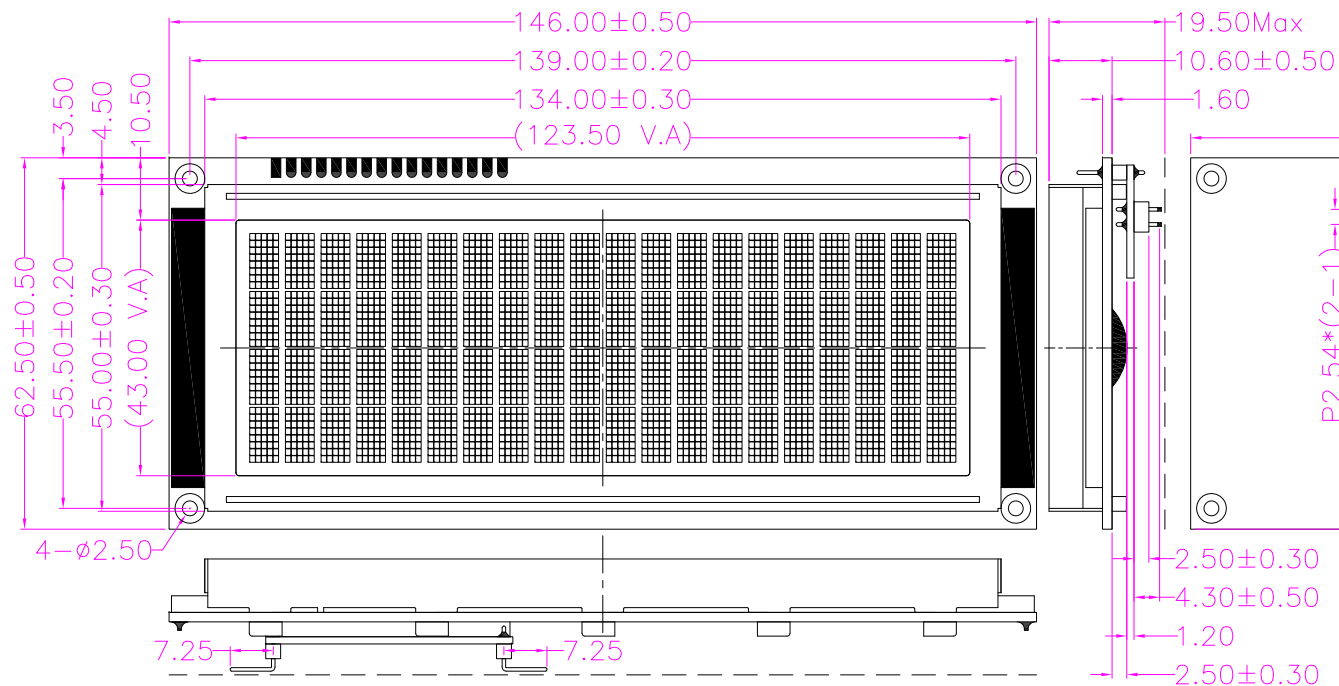


CN1:LCM Interface		CN2:Backlight Interface	
Pin NO.	Pin Name	Pin NO.	Pin Name
1	VSS	1	LED(+)
2	VCC	2	VCC
3	SDA	Backlight ON:Connect CN2-1,CN2-2	
4	SCL	Backlight OFF:Disconnect CN2-1,CN2-2	
Interface		IIC	

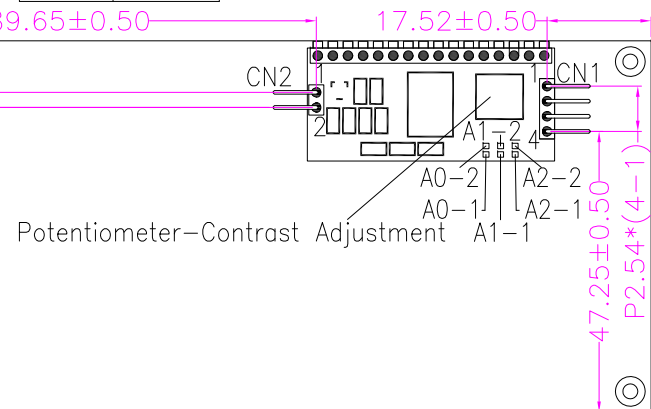

DETAIL DOTS

INPUTS			IIC BUS SLAVE ADDRESS
A2-1,A2-2	A1-1,A1-2	A0-1,A0-2	
Connect	Connect	Connect	0x20
Connect	Connect	Disconnect	0x21
Connect	Disconnect	Connect	0x22
Connect	Disconnect	Disconnect	0x23
Disconnect	Connect	Connect	0x24
Disconnect	Connect	Disconnect	0x25
Disconnect	Disconnect	Connect	0x26
Disconnect	Disconnect	Disconnect	0x27

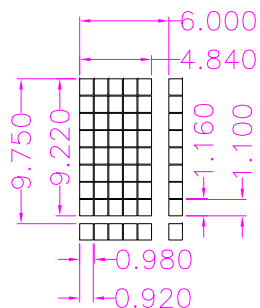

SPECIFICATIONS:

- 1.DISPLAY TYPE:YELLOW-GREEN/STN
- 2.VIEWING DIRECTION:6:00 O'CLOCK
- 3.POLARIZER MODE:TRANSFLECTIVE/POSITIVE
- 4.DRIVE METHOD:1/16 DUTY,1/5 BIAS
- 5.OPERATING TEMP:-20°C---+70°C
- 6.STORAGE TEMP:-30°C---+80°C
- 7.WORKING VOLTAGE:VDD-VSS=+5.0VDC
- 8.BACKLIGHT:YELLOW-GREEN
- 9.ALL UNMARKED TOLERANCES:±0.20mm/±0.5°

								深圳市佳显电子技术有限公司 ShenZhen Goodview Electronic Technology Co.,Ltd			
								绘图: 李建清 Drawing NO.: LCM-SJXD2004B-ZDYSYWN			
								审核: 客户编号:			
								批准: 图纸版号: V1			
								单位: mm			
								日期: 2025-02-19			
								页数: 1/1			
版本	标记	更改内容	更改人	日期	版本	标记	更改内容	更改人	日期		
Ver.	Mark	Modify the content	Modified by	Date	Ver.	Mark	Modify the content	Modified by	Date		
					V1		First issue	李建清	20250219		