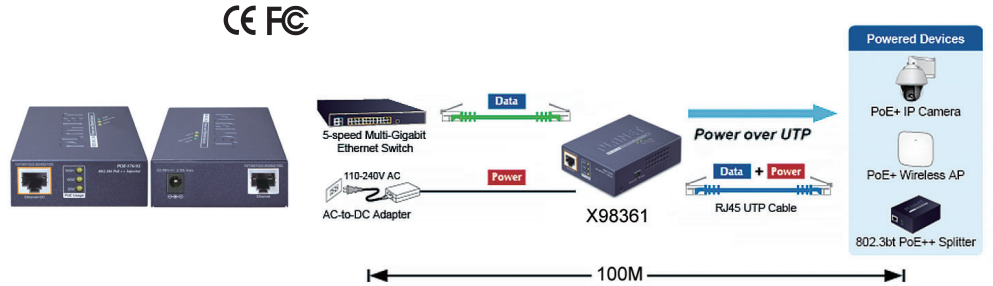


X98361

Single-port 95W 802.3bt PoE++ injector

Specifications:

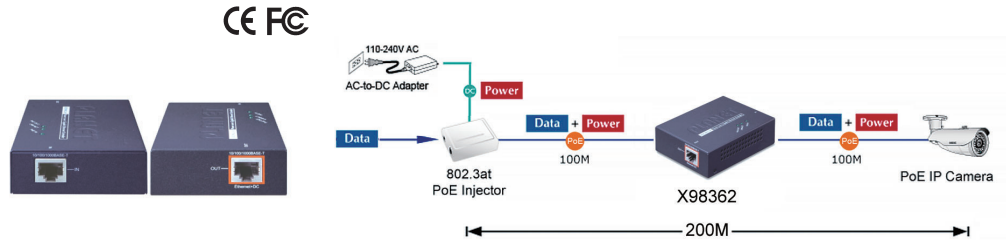
- Input port: 1 x RJ45 STP
- Output port: 1 x RJ45 STP PoE
- DC input: 52V~54VDC/2.5A Max.
- Data rate: 10M/100M/1G/2.5G/5G/10Gbps
- PoE output power: 52V~54VDC/95W Max.
- PoE power type: End-span+Mid-span
- PoE standard: IEEE 802.3af/at/bt PSE
- Operating Temp.: 0°C to 50°C
- Dimensions: 94(W) x 70(D) x 26(H) mm
- Weight: 195g


X98362

Single-port 26W 802.3at PoE+ extender

Specifications:

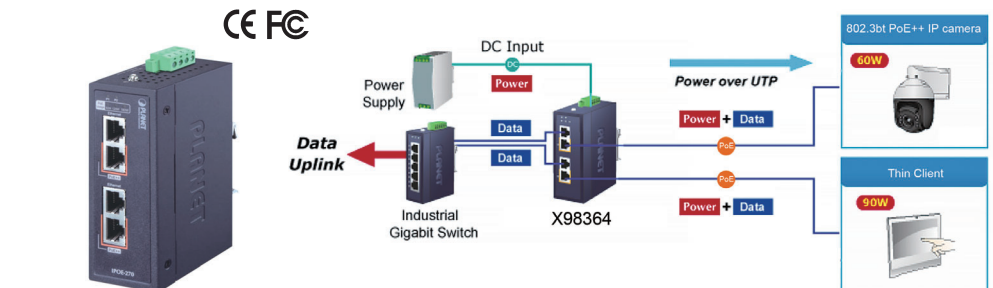
- Input port: 1 x IEEE 802.3af/at PoE
- Output port: 1 x IEEE 802.3af/at PoE
- PoE input power: 48V~56VDC/30.8W Max.
- Data rate: 10M/100M/1000Mbps
- PoE output power: 44V~52VDC/26W Max.
- PoE power type: End-span/Type A
- PoE standard: IEEE 802.3af/at PSE
- Operating Temp.: -10°C to 60°C
- Dimensions: 94(W) x 70(D) x 26(H) mm
- Weight: 189g


X98364

Industrial 2-ports 180W 802.3bt PoE++ injector hub can reach to IP30

Specifications:

- Input port: 2 x RJ45 STP
- Output port: 2 x RJ45 STP PoE
- DC input: 48V~54VDC/2.5A Max.
- Data rate: 10M/100M/1G/2.5G/5Gbps
- PoE output power: 48VDC/120W Max.
52V/54VDC/180W Max.
- PoE power type: End-span+Mid-span
- PoE standard: IEEE 802.3at/bt PSE
- Operating Temp.: -40°C to 75°C
- Dimensions: 41(W) x 70(D) x 115(H) mm
- Weight: 284g


X98366

4-ports 65W 802.3at PoE+ with 2 uplink ports switch

Specifications:

- Input port: 2 x RJ45 STP
- Output port: 4 x RJ45 STP 802.3af/at PoE
- DC input: 54VDC/1.3A Max.
- Data rate: 10M/100M/1000Mbps
- PoE output power (per port):
54VDC/15.4W Max.@802.3af
54VDC/30W Max.@802.3at
- PoE power type: End-span
- PoE standard: IEEE 802.3af/at PSE
- Operating Temp.: 0°C to 50°C
- Dimensions: 168(W) x 93(D) x 32(H) mm
- Weight: 374g


X98368

2-ports 90W 802.3bt PoE++ & 2-ports 30W 802.3at PoE+ with 1 uplink port switch

Specifications:

- Input port: 1 x RJ45 STP
- Output port: 2 x 802.3bt PoE++ (Ports 1&2)
2 x 802.3af/at PoE+ (Ports 3&4)
- DC input: 55VDC/2.8A Max.
- Data rate: 10M/100M/1000Mbps
- PoE output power: 90W Max. (Ports 1&2)
30W Max. (Ports 3&4)
- PoE power type:
End-span+Mid-span (Ports 1&2)
End-span (Ports 3&4)
- PoE standard: IEEE 802.3at/bt PSE
- Operating Temp.: 0°C to 50°C
- Dimensions: 168(W) x 93(D) x 32(H) mm
- Weight: 414g

