

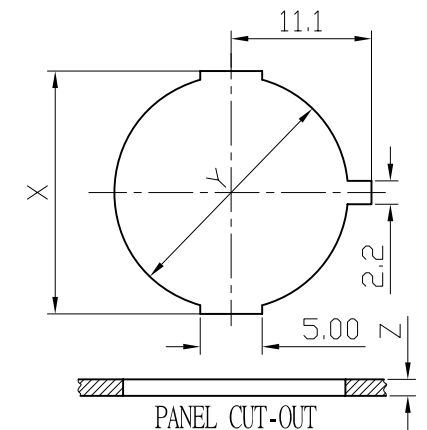
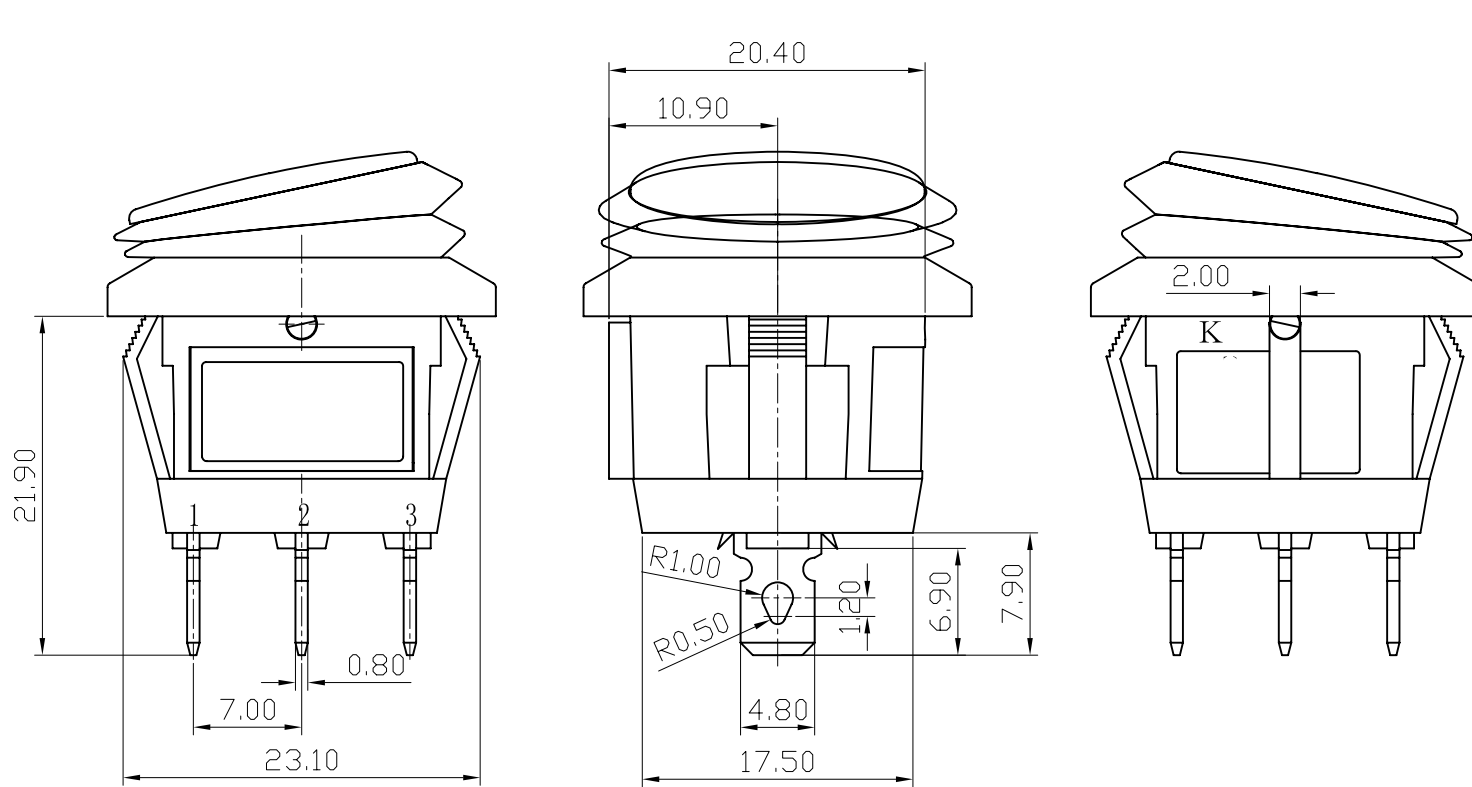




PANEL CUT-OUT		
Z	X	Y
0.70~1.00	20.60~21.20	19.4~19.5
1.00~1.50	21.30~21.90	19.4~19.5

- NOTES:
- Rating:
CQC 6A 250V AC T105/55
6(8)A 250VAC
8A/128A 250VAC
cUL 6GPA 250V AC
10GPA 125V AC T105/55
VDE ENEC 6(4)A 250V AC T85/55
KC 6(4)A 250V AC T85/55
 - Circuit Diagram: 3P ON-OFF
 - Terminal Strength: $\geq 80N$
 - Electrical life: ≥ 10000 cycles
 - Withstand Voltage: Withstand Voltage: 1500VAC 1min
Terminals to Button: 3000VAC 1min
Leakage Current: 1mA
 - Current resistance: $\leq 50m\Omega$ (initial)
 - Insulation resistance: $\geq 100M\Omega$
 - Body Material: NYLON 66 94V-0~2

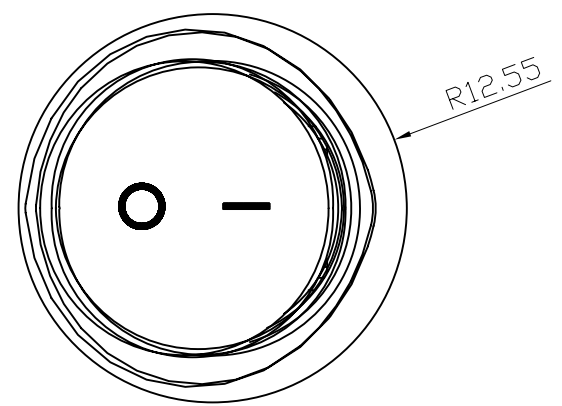

A4				普通公差:		WIN-KARE TECHNOLOGY CO.,LTD							
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单 位 UNIT	mm	投 影 PROJECTED		品 名 PRODUCT NAME	跷板开关	比 例 SCALE	Free
A1				ABOVE 5 TO 30	±0.30	绘 图 DRAWN BY	周金勇	核 对 CHECKED BY	梁金勇	型 号 MODEL NO.	RS601		
				ABOVE 30	±0.50	日 期 DATE	2017.2.25	核 准 APPROVAL BY	周培雷	图 号 DWG NO.	RS601CK-101N011RB		
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°								