


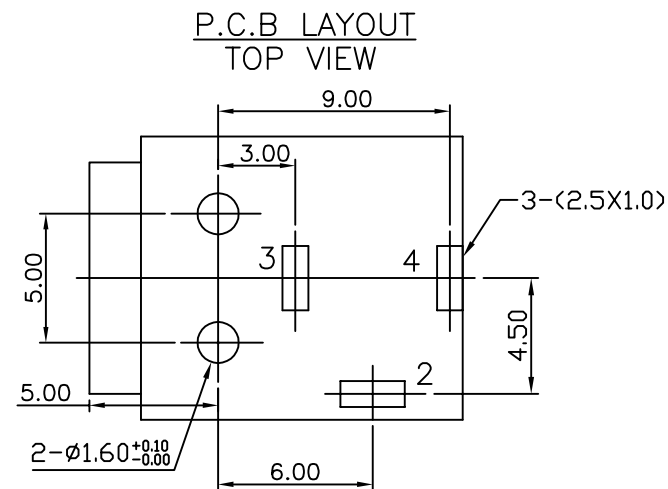
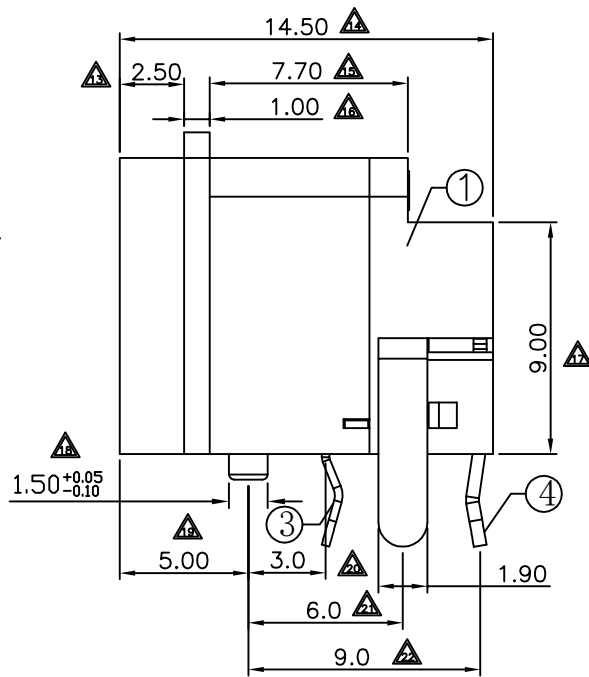
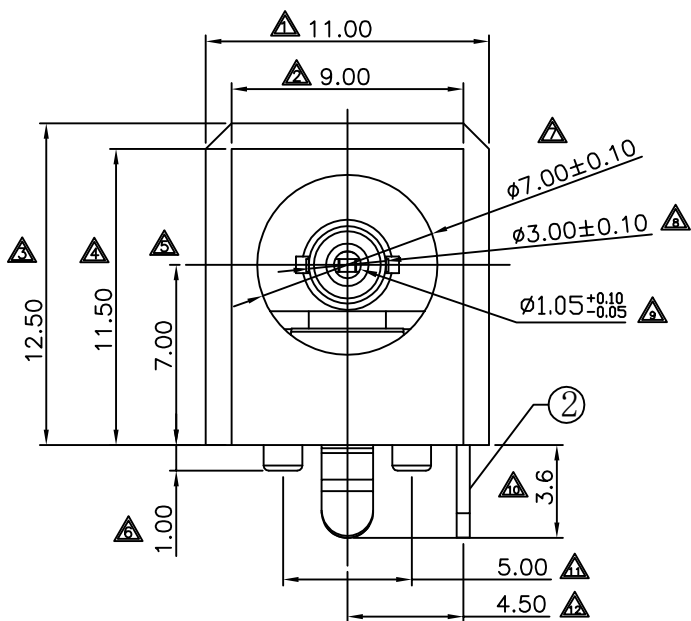


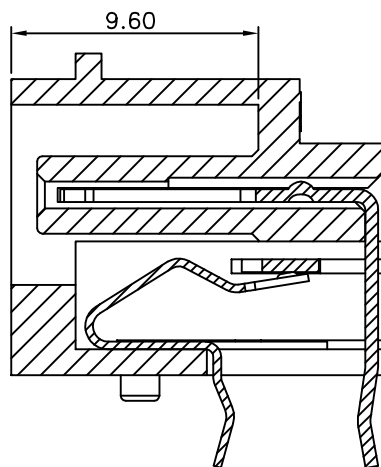

Level-1 Controlled Substances are banned

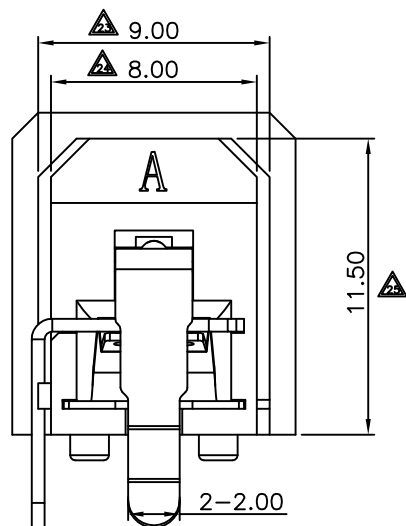

SCHEMATIC



SPECIFICATION

1. Operating temperature: $-25 \sim 85^{\circ}\text{C}$
2. Rating : DC 24V 3.0A:
3. Contact resistance: $\leq 0.03\Omega$
4. Insulation resistance: $\geq 100\text{M}\Omega$ (DC500V):
5. Withstand voltage: 500VAC :
6. Insertion and extraction force: 3-30N;
7. life test: 5,000 cycles.
8. Marked Δ are important dimensions.
9. wave soldering: dipped in solder pot $260 \pm 5^{\circ}\text{C}$ for 5 ± 0.5 seconds.

4	CONTACT FOOT	1	BRONZE	—	Ag-Plating
3	SPRING	1	BRONZE	—	Ag-Plating
2	CURVE PIECE	1	BRASS	—	Ag-Plating
1	HOUSING	1	PA66	BLACK	UL 94V-0
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

GENERAL TOLERANCE
UNLESS OTHERWISE SPECIFIED

General	Angle
X ± 0.50	X $\pm 3^{\circ}$
XX ± 0.30	XX $\pm 2^{\circ}$
XXX ± 0.20	XXX $\pm 1^{\circ}$
XXXX ± 0.10	



盛聰电子有限公司
SHENG CONG ELECTRONIC CO.,LTD

CUSTOMER
COPY

TITLE: DC-JACK

PART NO.

DJ-D038C

PROJ:

SCALE: 1:1

UNIT:mm

SIZE: A4

SHEET: 1 OF 1

						DESIGN	Steven	23'/05/05	
						CHECK	Jason	23'/05/05	
						APPRO.	Max.hu	23'/05/05	
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	APPRO.	Max.hu	23'/05/05	

Original:Design: Steven Check: Jason Appro: Max.hu Date: 23'/05/05