


Anti Vandal Switch $\Phi 12\text{mm}$

Applications / Markets



Yacht Controls



Security Devices



Industrial Controls



Kiosks



Electrical Housewares



Medical Equipment

RoHS

Specifications

Electrical Rating: 2A36VDC
Mechanical Life: 200,000 Cycles
Electrical Life: 50,000 Cycles
Contact Resistance: 50m Ω Max.
Insulation Resistance: 1000 M Ω Min.
Dielectric Strength: 2,000VAC
Operating/Storage Temperature: -20°C to 55°C
Travel: 1.50mm
Moisture Protection: IP65
Actuation Force: 4N
Panel Thickness: 1-11mm
Mounting Nut Torque: 5-14Nm

Features & Benefits

- 12mm diameter panel cutout
- Variety LED option
- Dot, ring illumination available
- Multiple actuator options
- Pilot indicator option
- IP65 rated,
- Momentary Off-(On), Latching Off-On

PART NUMBER CONFIGURATOR

Series	Actuator Options	Terminal Options	Function Options	Rating Options	Body Finish Options	Lens Style Options	LED-Color Options	Illumination Voltage Options
L12	☐	☐	☐	☐	☐	☐	☐	☐
	F - Flat H - High	Solder Lug	M - Momentary Off-(On) Z - Latching Off - On	NONE - Max. 2A36VDC	S - Stainless Steel B - Nickel	NONE - Non-Illuminated 2 - Dot Illumination 3 - Ring Illumination	NONE - Non-Illuminated W - White R - Red O - Orange G - Green B - Blue Y - Yellow	NONE - Base Voltage*

NOTES:




* Base voltage on LEDs:

1.8V @ 20mA for Red, Yellow and Orange LED colors
2.8V @ 20mA for Blue, Green and White LED colors




Specifications subject to change without notice

Anti Vandal Switch $\Phi 12\text{mm}$

Non-illuminated



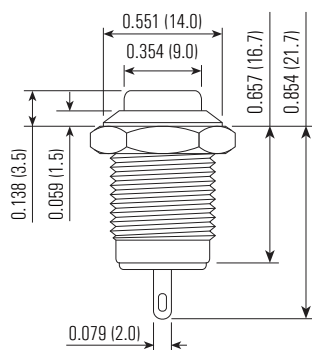


Latching

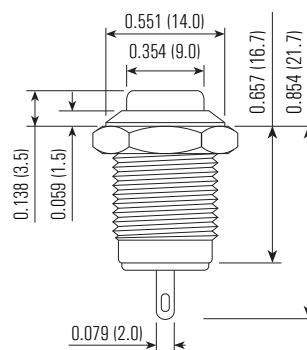




Momentary

Ring-illuminated

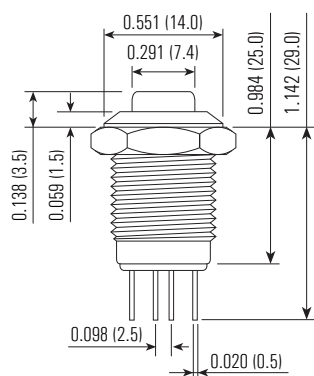




Latching

Illum. terminals

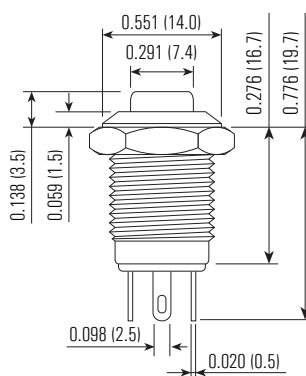




Momentary

Dot-illuminated

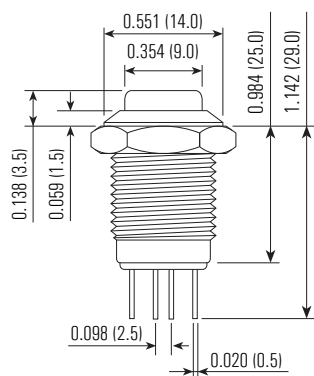

Latching

Illum. terminals

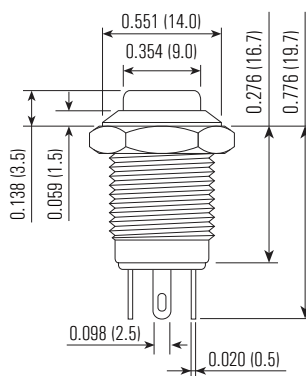

Momentary