
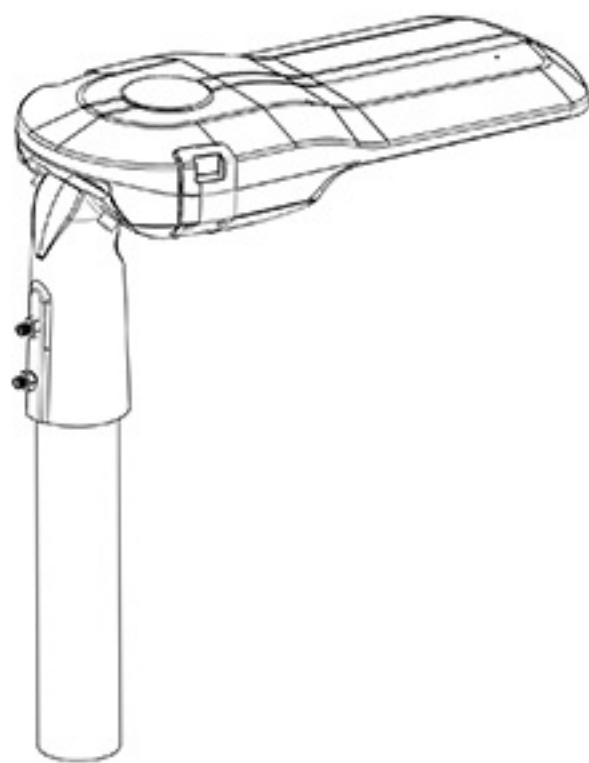



产品安装图

安装孔60MM

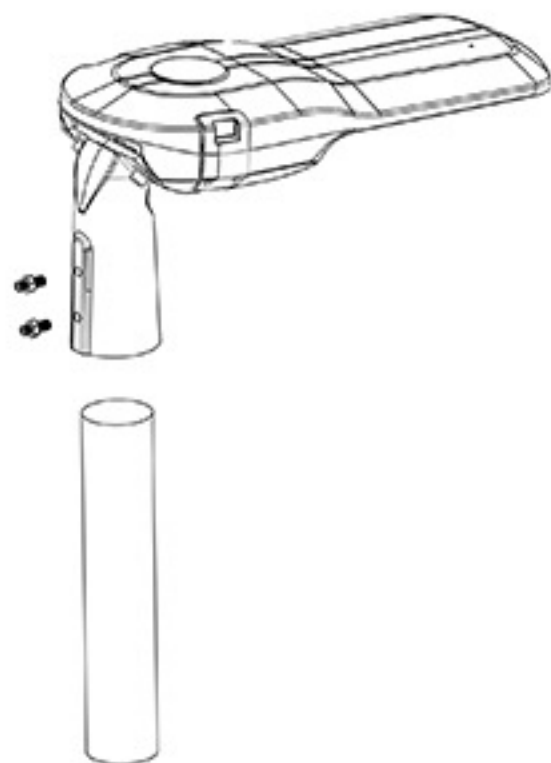


杆式安装

产品尺寸

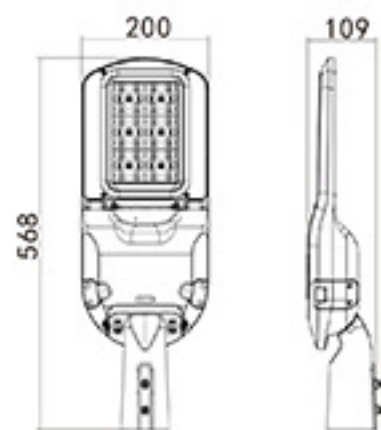


25-60w

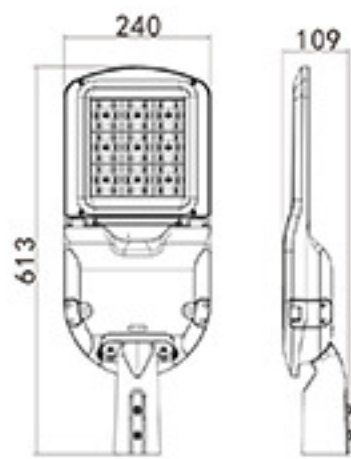


80-120w



150-180w

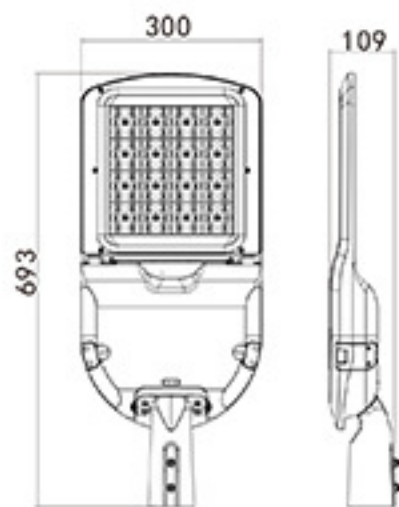


200-250w

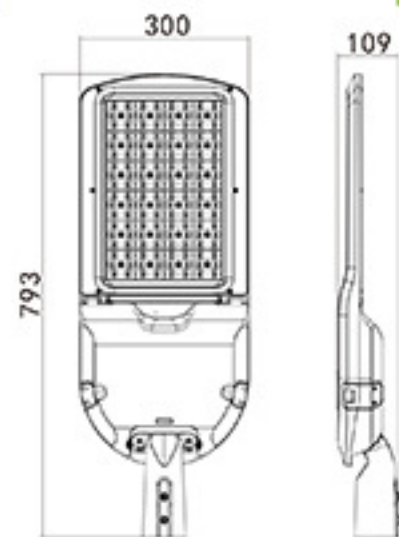


300-320w

标注单位: mm


产品尺寸 (带光感)

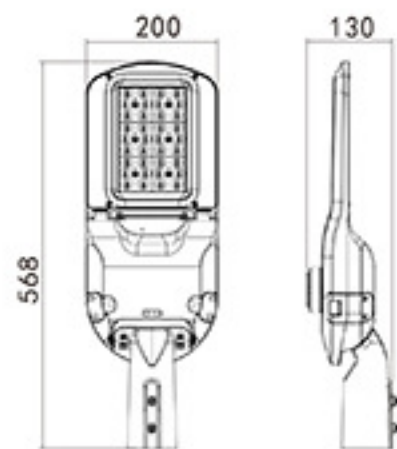


25-60w

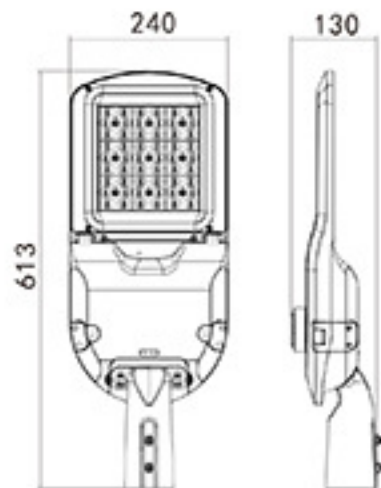


80-120w

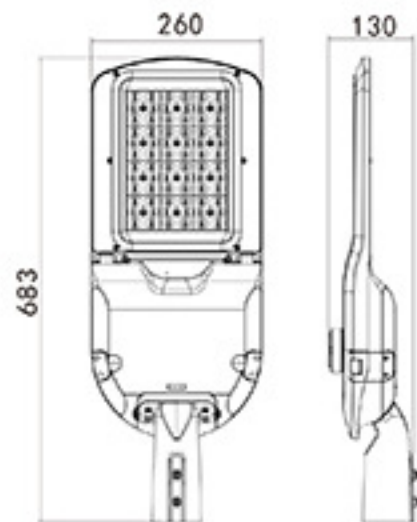

150-180w

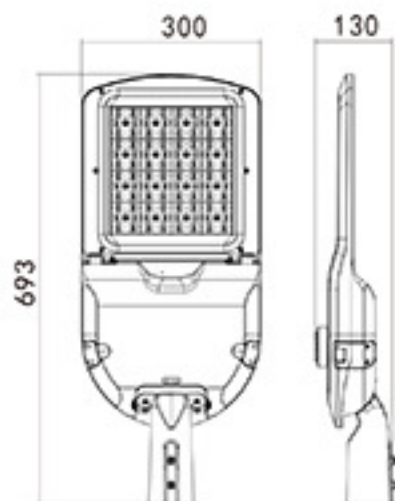

200-250w

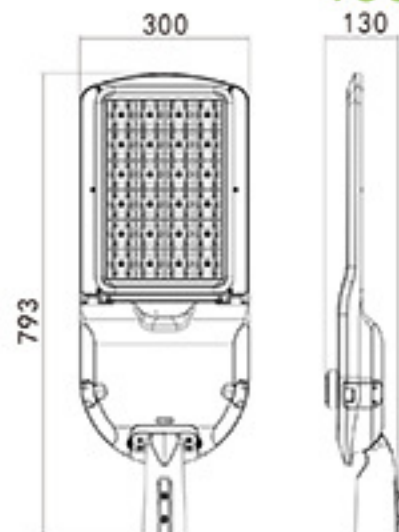

300-320w

标注单位: mm





50W

100W

150W

200W

300W

- ADC12 high purity aluminum, integrated die-casting
- Using professional anti-glare lens: PC lens angle: T2M/T3M/T4M/60°/90°/120°
- 0/1-10V dimming, time control, light control sensor, IoT control and other functions are optional.
- Flat honeycomb design, good heat dissipation
- The level locator is easy to install
- The protection level reaches IP66
- Snap-in installation, tool free disassembly
- Tempered glass panel, glue-free fixation