


PB12A

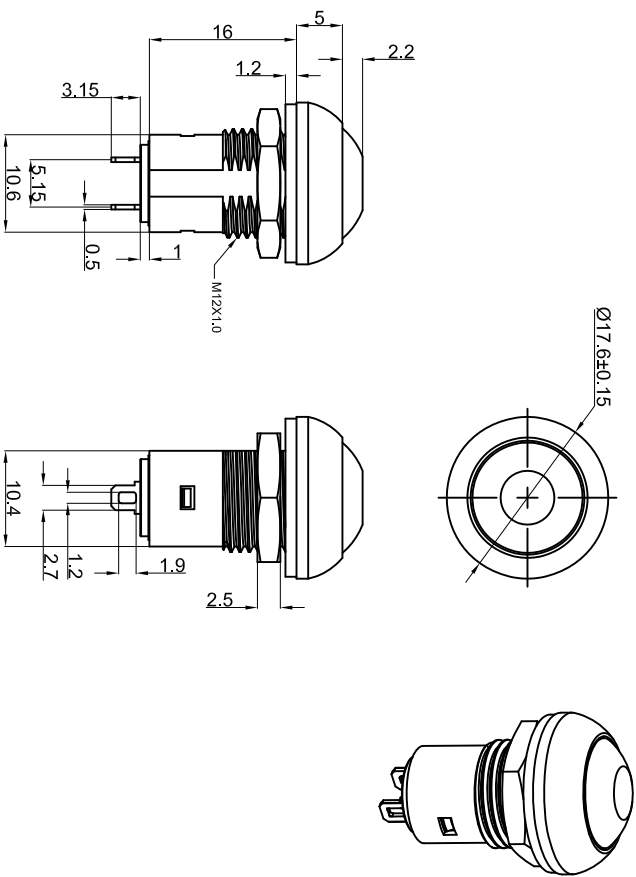

SPECIFICATIONS

- Circuit

:SPST
- Current rating

:0.1A / 2A
- Voltage rating

:24VDC/125VAC
- Dielectric withstanding voltage

:1000VAC for 1 minute
- Contact resistance

:50mΩ Max
- Inslation resistance

:100MΩ Min
- Travel

:2.5mm±0.5mm
- Operating Force

:300±50gf
- Mechanical Life

:Over 100,000 cycles
- Electrical Life

:Over 10,000 cycles
- Manual Welding


:350°C for 3 seconds
- Function

:OFF-ON
- Operating temperature

: -20°C ~ +85°C

MATERIAL:

- Base: PA66,UL rated:94V-2 Min;
- Cap: PA66 ;
- Terminal: Copper,Silver plated ;
- Nut: Brass, NI Plated .

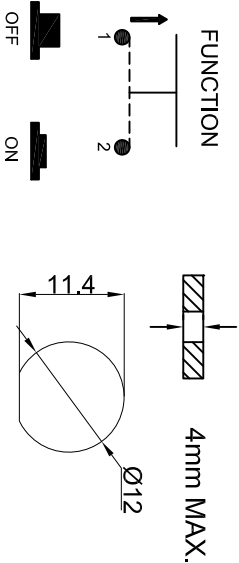

Note:
This product is strictly prohibited wave soldering and reflow soldering,please use the manual welding processing, temperature of 350°±5°and time is 3±0.5 seconds;

			公差 TOLERANCES		.X± 0.3		.XX± 0.15		角度 ANGLE ± 1°		单位 DIMENSION UNIT		mm.	
			视角 VIEWING ANGLE		比例尺 SCALE	NONE	日期 DATE	2016.10.07	品名 TITLE		图号 DRAWING NO			
A1	增加产品焊锡说明	2016.10.07							PB12-A-1R-N-N		PB12-A-1R-N-N_CP_A1			
A0	New Issue	2014.07.30							PB12-A-1R-N-N		PB12-A-1R-N-N_CP_A1			
版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	核准 APPROVED BY	核 对 CHECKED BY	Sinc	绘图 DRAWN BY	姜庆勇						