
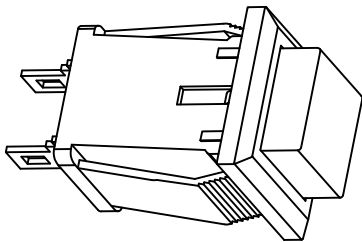


PB04



Rating : 3A 125V AC ;

1.5A 250V AC ;

Contact Resistance : 20mΩ Max. ;

Insulation Resistance : DC 500V 100MΩ Min. ;

Dielectric Strength : AC 1000V 1 minute

Total Travel : 2.5±0.4mm

Operating Force : 300±100gf

Mechanical Life : Over 30,000 cycles

Electrical Life : Over 10,000 cycles





Operating Temperature: -20°C~85°C

Soldering Temperature: 256°C for 5 Seconds

Function : OFF-ON

Welding method : Manual Soldering

(350 ° C±5 ° C,3s±0.5s)

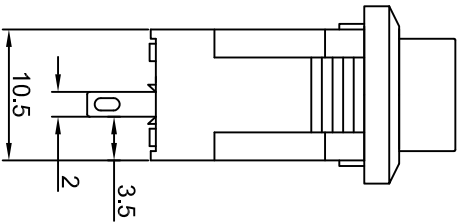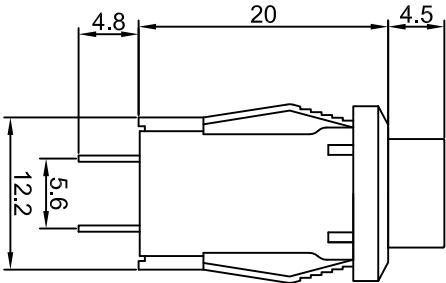

Panel Thickness: 3mm MAX.

MATERIAL:

Base:Nylon66 UL rated: 94V-2 Min. ;

Cap:PA66 ;

Terminal: Brass,Silver or Tin plated .

CUT-OUT

Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
G	Green	绿色
B	Black	黑色
A	Gray	灰色
CAP COLOR (X)		

		公差 TOLERANCES	视角	比例尺 SCALE	角度 ANGLE	单位 DIMENSION UNIT	品名 TITLE	图号 DRAWING NO
A1	重新整理	2016.12.11	N/A	核 准	NONE	日期 DATE	2016.12.11	PB04-A-R
A0	New Issue	2011.12.08	N/A	核 对	Sinc	日期 DATE	2016.12.11	PB04-A-R_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY	绘图 DRAWN BY	P.W.Rao	PB04-A-R_A1