
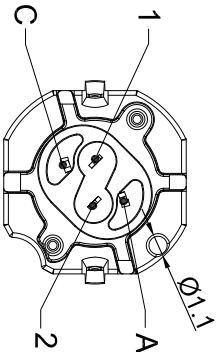
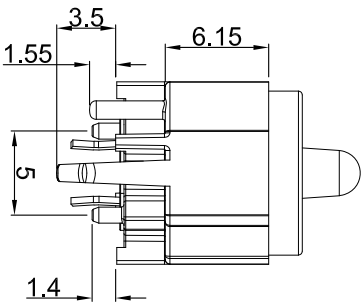
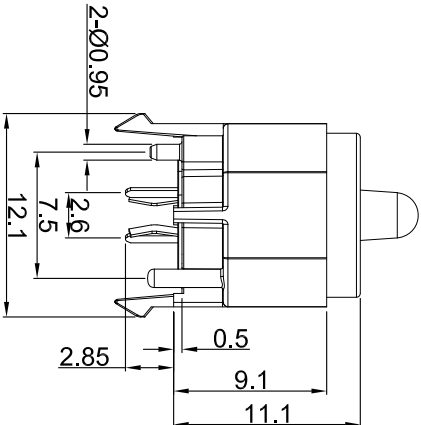



KS12



SPECIFICATIONS


Circuit

- Current rating :10mA min./100mA max.
Voltage rating :2V DC min./30V DC max.
Dielectric withstanding voltage :500VAC for 1 minute
Contact resistance :50mΩ Max. (Initial)
Insulation resistance :100MΩ Min.
Operating force :600±100gf
Total travel :1.5±0.4mm
Operating life: :1,000,000 cycles Min
Bounce time: : ≤ 1ms
Operating speed 100 mm/s(3.94/s)
Solder specifications :260°C for 5 seconds
Operating temperature :- 40°C ~ + 85°C
Protection class : IP40


MATERIAL:

Base : PA+GF, UL rated:94 V-2 Min;
Cap: POM;
Terminal: Brass, Silver plated;

CIRCUIT



P.C.B. LAYOUT

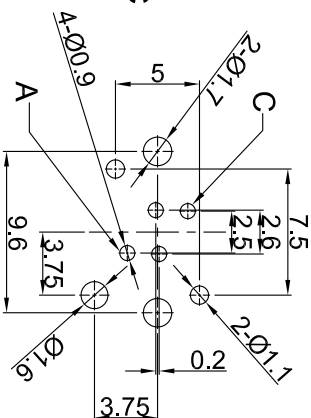

U	Blue	蓝色
Y	Yellow	黄色
G	Green	绿色
R	Red	红色
W	White	白色
Clip emitted color (X)		
灯的发光颜色(X)		

公差 TOLERANCES			视角 VIEWING ANGLE		比例尺 SCALE		角度 ANGLE± 1°		单位 DIMENSION UNIT		图号 DRAWING NO	
.X± 0.3 .XX± 0.15			核 准		NONE		日期 DATE		品 名 TITLE		KS12-PL1.5-BBX-6N-S (3只定位柱/带灯)	
2021.11.03			Richard		Sinc		2021.11.03		姜庆勇		KS12-PL1.5-BBX-6N-S_CP_A0	
N/A			核 对		DATE		日期		日期		日期	
2021.11.03			变更说明		CHANGE DESCRIPTION		日期		日期		日期	
New Issue			A0		A0		A0		A0		A0	
版本			变更说明		CHANGE DESCRIPTION		日期		日期		日期	