


COT170E-IWF03

17" Industrial Open-Frame Touch Monitor

IR Touch screens ,2Points touch, Surface structure waterproof can meet IP67 standard

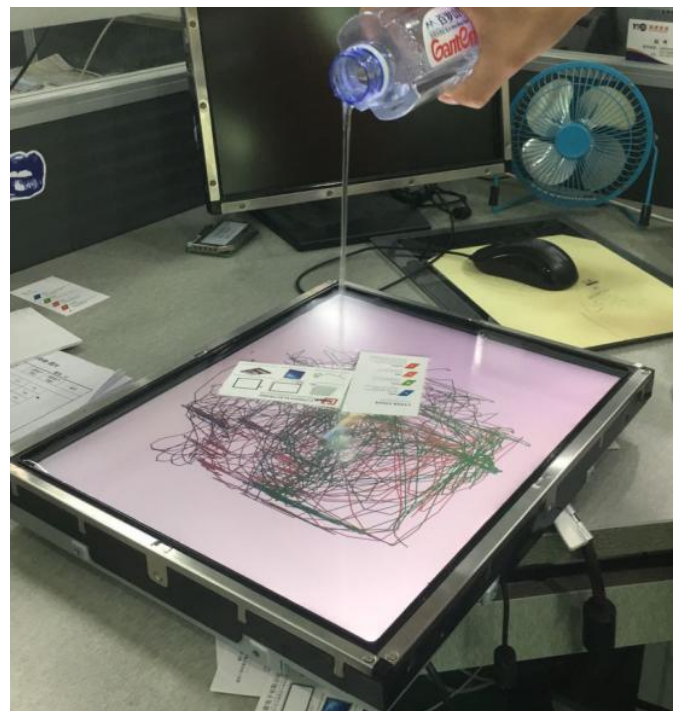

COT170E Serials Model Definition

COT170E-IWF03	2 Point Infrared Touch Screen	VGA/DVI/HDMI	Plastic Front Frame
---------------	-------------------------------	--------------	---------------------

DongGuan CJTOUCH Electronic Co., Ltd.

Open Frame Touch Monitor Parameters

General	
Model	COT170E-IWF03
Series	Water-proof and Compact
Monitor Dimensions	Width: 368mm Height: 306mm Depth: 55mm
Weight (N.W/G.W)	5Kg / 7.8Kg (Approx.)
LCD Type	17" SXGA Color TFT-LCD
Video Input	VGA HDMI and DVI
OSD controls	Allow on-screen adjustments of Brightness, Contrast Ratio, Auto-adjust, Phase, Clock, H/V Location, Languages, Function, Reset
Power Supply	Type: External brick Input (line) voltage: 100-240 VAC, 50-60 Hz Output voltage/current: 12 volts at 4 amps max
Mount Interface	1)VESA 75mm and 100mm 2)Mount bracket, horizontal or vertical
LCD Specification	
Active Area(mm)	337.920(H)×270.336(V)
Resolution	1280×1024@60Hz
Dot Pitch(mm)	0.264×0.264
Nominal Input Voltage VDD	+5.0V(Typ)
Viewing angle (v/h)	80°/85°(CR=10)
Contrast	1000:1
Luminance(cd/m2)	250
Response Time(Rising/Falling)	5ms/5ms
Support Color	16.7M colors
Backlight MTBF(hr)	30000
Touchscreen Specification	
Type	Cjtouch IR touch screen
Resolution	4096*4096
Light Transmission	92%
Touch Life Cycle	50 millions
Touch Response time	8ms
Touch System Interface	USB interface
Power consumption	+5V@80mA
External AC Power Adapter	
Output	DC 12V /4A
Input	100-240 VAC, 50-60 Hz
MTBF	50000 hr at 25°C
Environment	
Operating Temp./Storage Temp.	0~50°C /-20~60°C
Operating RH/Storage RH::	20%~80% / 10%~90%

Components

USB Cable 180cm*1 Pcs,VGA Cable 180cm*1 Pcs,Power Cord with Switching Adapter *1 Pcs, Bracket*2 Pcs

