



威固电子户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION



户内常规 P2.5 表贴三合一

INDOOR CONVENTIONAL P2.5 SMD 31N1 PRODUCT SPECIFICATION

产品规格书

户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION


技术参数

TECHNICAL PARAMETERS

模组 Unit Module	项目	Item	参数	Parameter
	产品型号	Model Number	VG-P2.5-32scan	
	模组尺寸	Module Size	320mm*160mm	
	物理点间距	Physical Pitch	2.5mm	
	物理密度	Physical Density	160000 dots/m2	
	发光点颜色	Pixel Configuration	1R1G1B	
	LED 封装	Package Mode	SMD 3IN1 -2121	
	模组分辨率	Module Resolution	128dots(W)*64dots(H)	
	模组最大功耗	Max Power Consumption	30W	
	模组厚度	Module Thickness	16.5mm	
	模组重量	Module Weight	475g	
	驱动方式	Drive Type	恒流驱动 Constant drive	
	扫描方式	Scan Mode	1/32 扫描 1/32scan	
	接口方式	Port Type	HUB75	
	匹配箱体尺寸	Match Cabinet Size	W640mm*H480mm W640mm*H640mm W960mm*H480mm	

户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

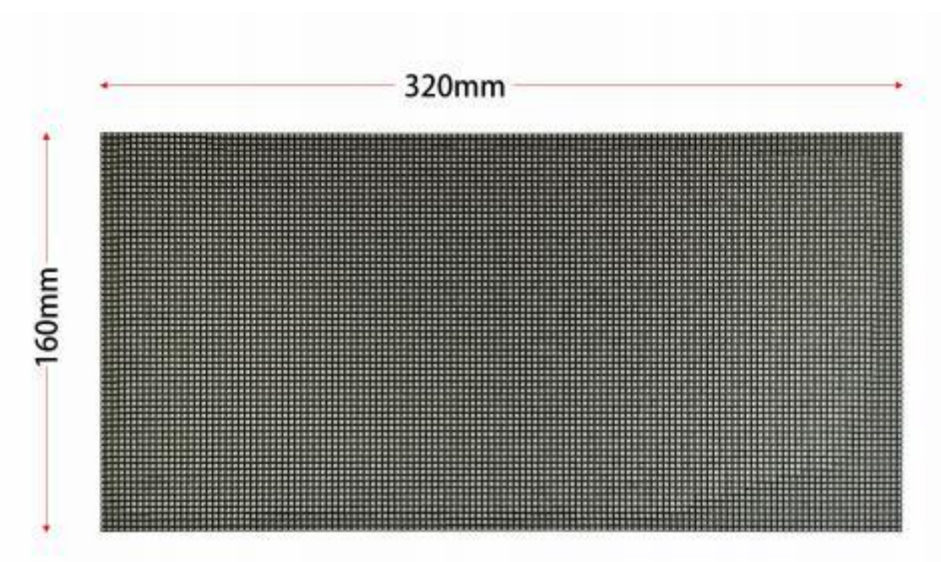

户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

显示屏参数 Display Parameters	最佳视角 Best Viewing Angle	H:120° ;V:120°
	视距 Recommended Viewing Distance	2.5m-18m
	驱动 ic Driver IC	北方集创 ICN2153
	画面刷新率 Refresh Rate	3840Hz
	白平衡亮度 Brightness of White Balance	700cd/m²
	输入电压 Input Voltage	110-220V;AC±10%
	工作温度/湿度 Operating Temperature/ Humidity	-20℃ ~+50℃
	平均功耗 Average Power Consumption	150-250w/m²
	最大功耗 Max. Power Consumption	600w/m²
	寿命 Life Time	>100000 hours
	坏灯率 Bad Light Rate	<0.0001
	平均无故障时间 MTBF	>5000 hours

户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

案例分享

CASE SHARING

