


客户审核此型号所有图纸！请签字确认：

VIEWING DIRECTION

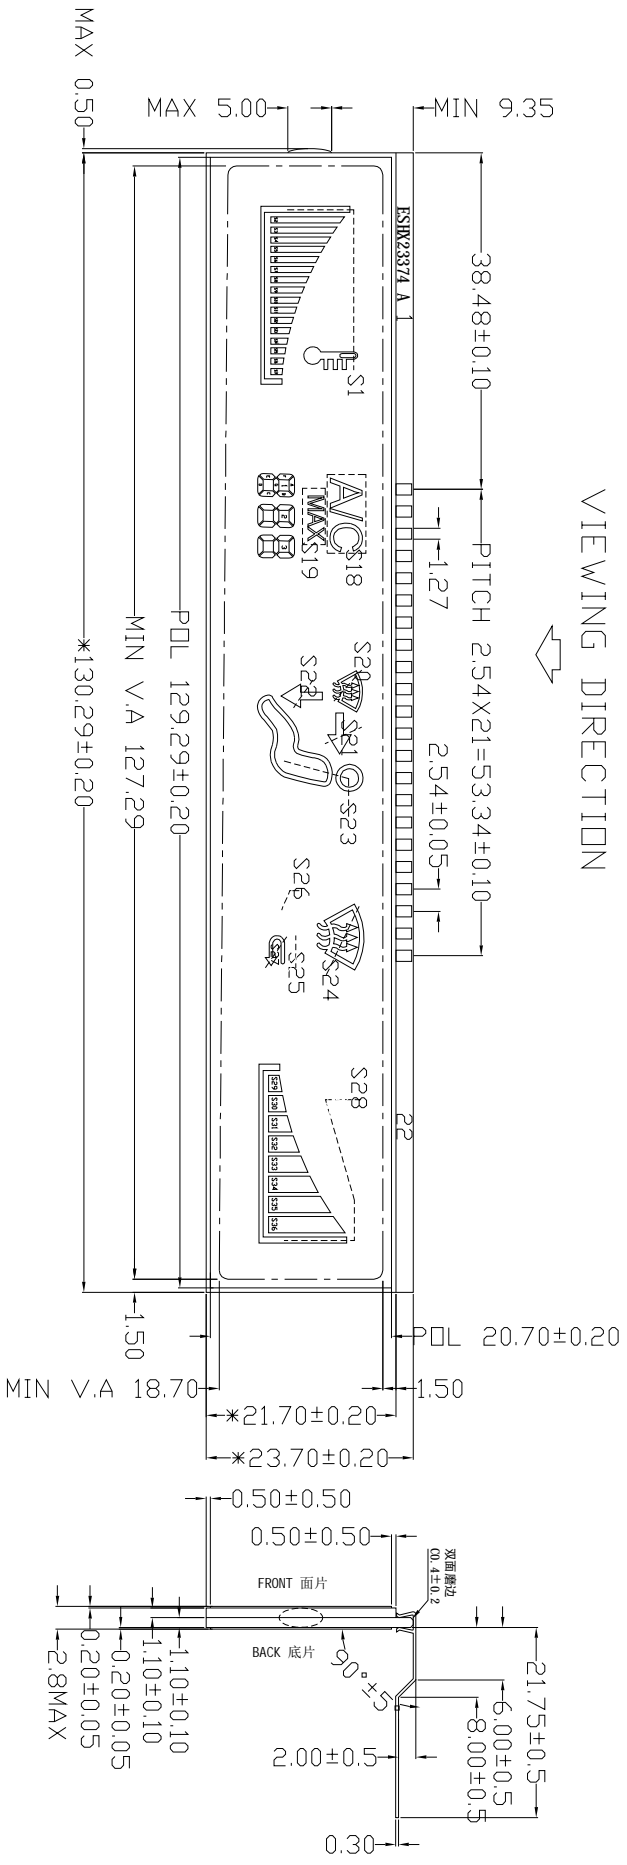

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
COM1	--	COM1	--	--	--	S1	S8	S9	S16	--	1D	--	2D	--	3D	--	S22	--	--	S30	S28	--
COM2	--	--	COM2	--	--	S2	S7	S10	S15	S17	1E	1C	2E	2C	3E	3C	S23	--	--	S29	S31	S36
COM3	--	--	--	COM3	--	S3	S6	S11	S14	S18	1F	1G	2F	2G	3F	3G	S21	S27	S25	S32	S35	--
COM4	--	--	--	--	COM4	S4	S5	S12	S13	S19	1A	1B	2A	2B	3A	3B	S20	S26	S24	S33	S34	--

NOTES:

- DISPLAY TYPE: VA
- LCD OPERATING VOLT: 5.0V
- DRIVE MODE: 1/4DUTY, 1/3BIAS
- VIEWING DIRECTION: 12:00
- OPERATING TEMP: -30° C~+80° C
- STORAGE TEMP: -35° C~+85° C
- POLARIZER MODE: NEGATIVE, TRANSMISSIVE
- CONNECTOR: PIN
- CUSTOMER'S MODEL NO.: --
- SCREEN PRINTING: 无丝印
- ROHS: 符合“ROHS”要求
- IMPORTANT DIMENSIONS: “*”

REV.	DESCRIPTION	DATE
A	初始版本	2023-11-01



华芯科技(恩施)有限公司

DRAWN	RJ	MODEL NO.:	ESHX233741PVVA	
CHECKED	ZHJ	3rd ANGLE	SCALE: 1:1	PAGE: 1 OF 2
APPROVED	ZHJ	UNMARK TOL.:	±0.2	UNIT: mm
		DATE:	2023-11-01	

客户审核此型号所有图纸！请签字确认：

1


2

3


4

5


6

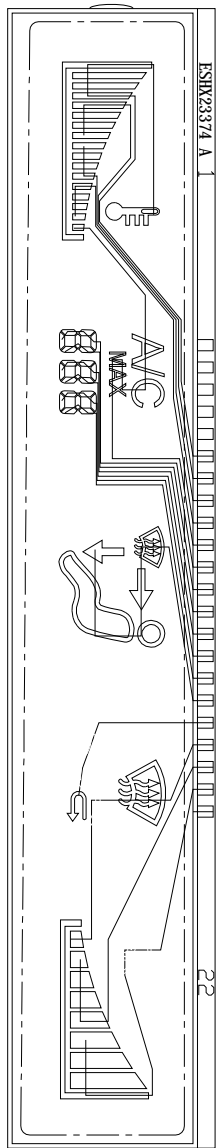

SEEG

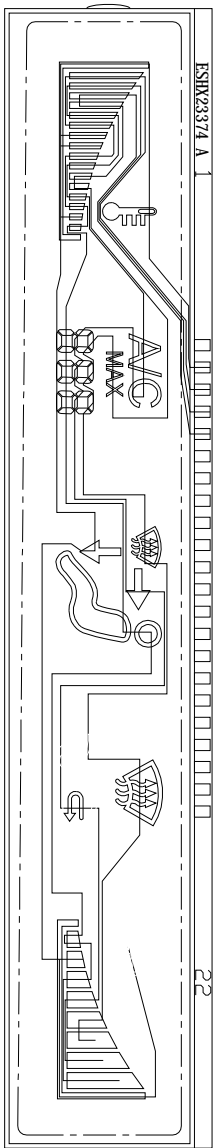

COM

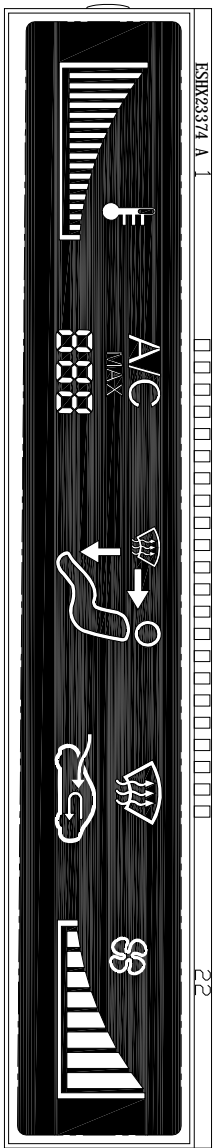

全显示效果图



华芯科技(恩施)有限公司

DRAWN	RJ	MODEL NO.:	ESHX233741PVVA		
CHECKED	ZHJ	3rd ANGLE	SCALE: 1:1	PAGE: 2	OF 2
APPROVED	ZHJ	UNMARK TOL.:	±0.2	UNIT: mm	DATE: 2023-11-01

D

C

B

A

1

2

3

4

5

6

D

C

B

A