

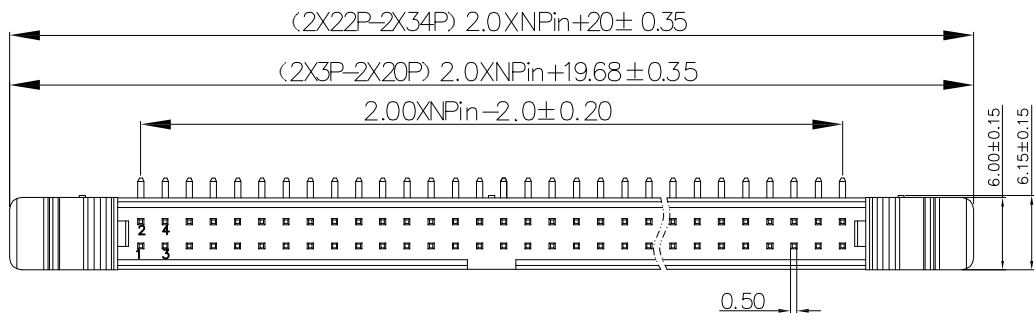


零件图	成品图	客户图
		○

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	JIN	2020-07-28

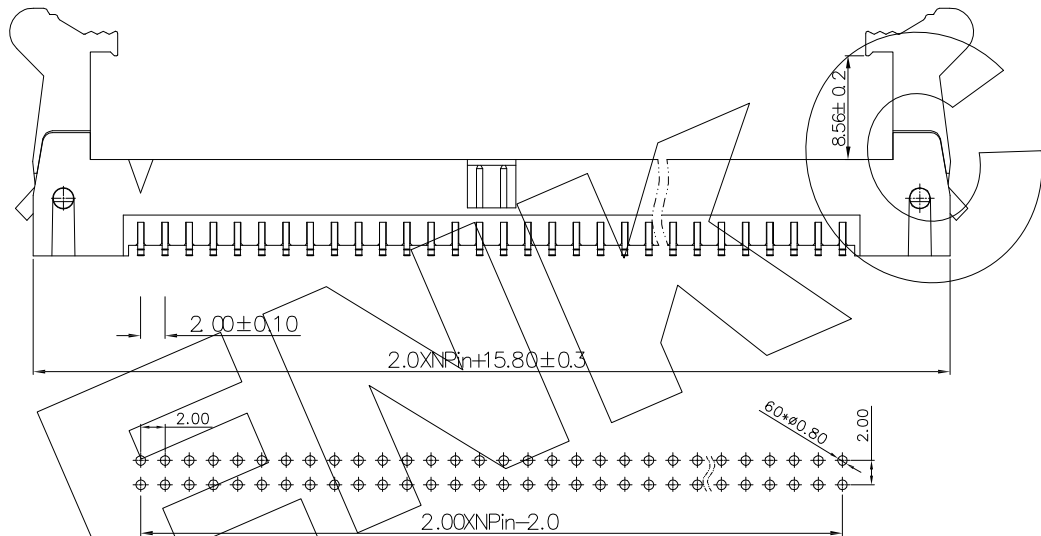

Recommended P.C.B Layout
General Tolerance±0.05



Technical Data

Material:
Contact Material: Brass
Contact plating: Au or Sn Over Ni
Insulator Material: Black Polyester UL94 V-0
Standard: PA6T+30%G/F.

Electrical:
Rating current: 1.5Amps/contact max.
Rating voltage : 100 V AC/DC
Contact resistance: ≤20mΩ/contact
Insulation resistance: ≥800MΩ
Withstanding Voltage: 400V AC/minute

Mechanical:
Mechanical life cycle: min.200
Operating temperatures: Gold Plated: -55°C to +105°C
Tin plated: -40°C to +105°C
Soldering temperature: +260°C max (PA9T).
DIM A&B CAN BE CUSTOMIZED BY CUSTOMERS

BHJ	XXX	12	R	XX	C	X	N	RXXX
HOUSING TYPE J PH2.00 H10.2	PIN No. No. of Positions XXX Positions	PRODUCT TYPE 12 Dual Row Single Base	ANGLE OPTIONS R 90° D 180° S SMT	PIN PLATING G0 Gold Flash G1 1u" Au G6 Au10u" S1 Sn+Au1u" S7 Sn+Au15u" S8 Sn+Au30u" T3 Matte Sn	INSULATOR MATERIAL C PA6T+30%GF	COLOR B BLACK W WHITE L BLUE G GREEN Y YELLOW R RED N NATURAL		PIN LENGTH L=XXXXmm

ENKCOM® www.enkcom.com TEL:+86(0)769 8904 9672 FAX:+86(0)769 8904 9671 E-MAIL:sales@anycom.tw		东莞市恩康电子科技有限公司 DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD			
TOLERANCE	DATE :	2020-07-28	TITLE:		
ANGLE ±5°	DRAWN :	JIN	2.0mm Pitch Double Row Straight Ejector Header		
X.XXX ±0.15	CHECKED :		PART NO: BHJXXX12RXXXXRXXX		
X.XX ±0.25	APPROVED :				
X.X ±0.38	PROJECTON		REV: A0	UNIT: mm	SCALE: 1:1
X. ±0.50			SIZE: A4	PAGE 1/1	