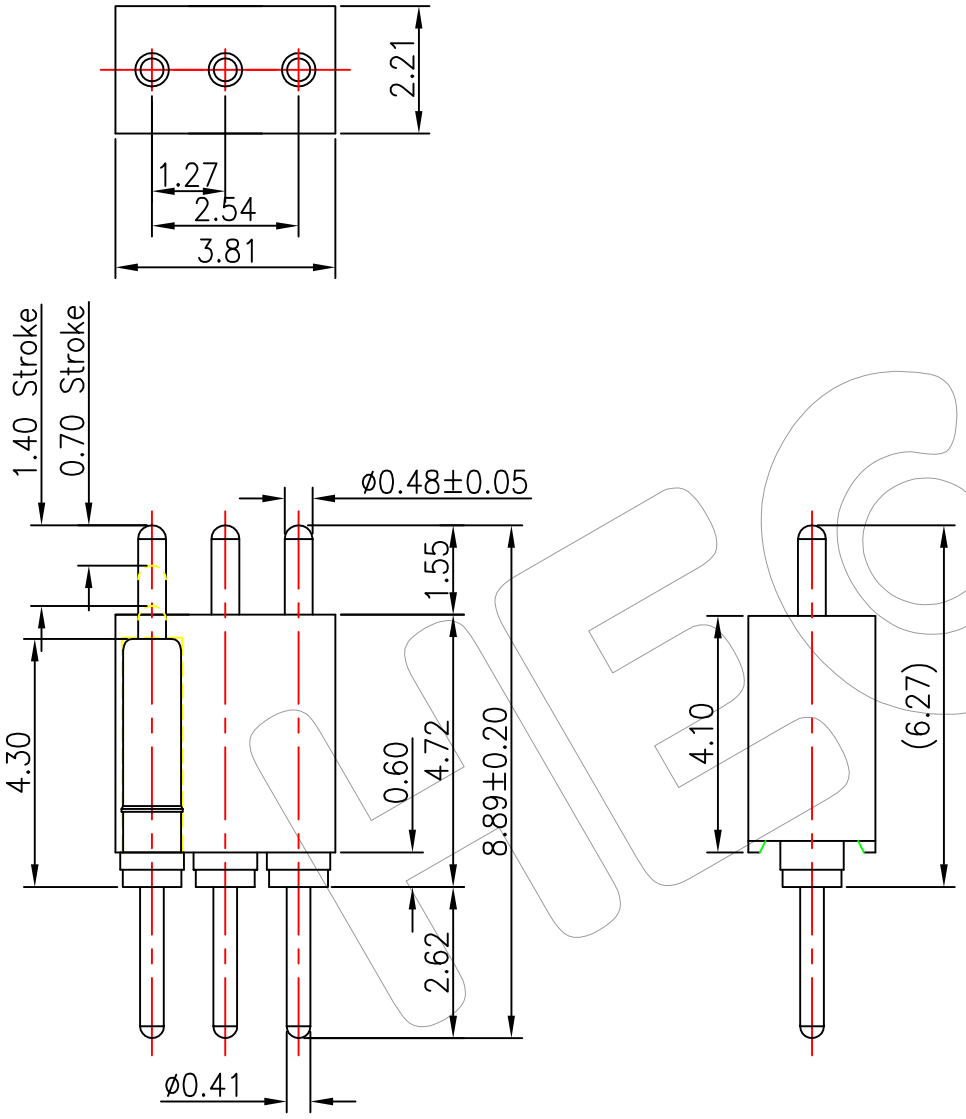


RoHS

NOTE
1.Material
Plunger: Brass 3604
Barrel: Brass 3604
Spring: Beryllium copper plated 10 micro-inch minimum Au
2.Plating
Plunger: 3 micro-inch minimum Au over 50~100 micro-inch nickel
Barrel: 5 micro-inch minimum Au over 50~100 micro-inch nickel
3.Electrical
Rated current & voltage: DC 12V; 1.0A Max.
Contact resistance: 50 mohm maximum at working height
4.Mechanical
Spring force: 60g±20% AT 0.7 stroke
Durability: 100,000 cycles(minimum)
5.To ensure the best usage,please operate it based on the working height Based on the engineering drawings,shall not exceed the maximum allowed compression
6.To avoid arcing issue, The adaptor start to power supply after connector mated fully.
7.RoHS compliant product.

Ordering Information

HC- PG M 127 41 03 N XX S X 01

- 03: No.of Pins 3Pin
- XX: Contact Plating
  G0:Gold Flash
  G1:3U" Gold
  G2:5U" Gold
  G3:10U" Gold
  G4:15U" Gold
  G5:30U" Gold
- X: Packing
  0=PE Bag
  A=Tray
  T=Tube
  R=Reel
- 01: Special

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0		NEW DRAWING	

OPERATION		DRAW	Ayang	
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD
https: www.hecon-cable.com

PART NO.	HC-PGM1274103NXXSX01
TITLE:	1.27mm 3Pin Pogo pin H4.1 Male