



SL15 SERIES

Slim voltage selector up to 12A 250VAC
single pole, snap-in or panel mounting, solder lug terminals

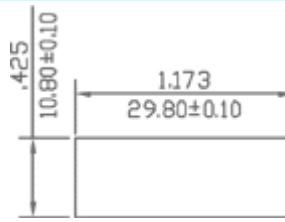

Mounting Hole of Snap-in Type

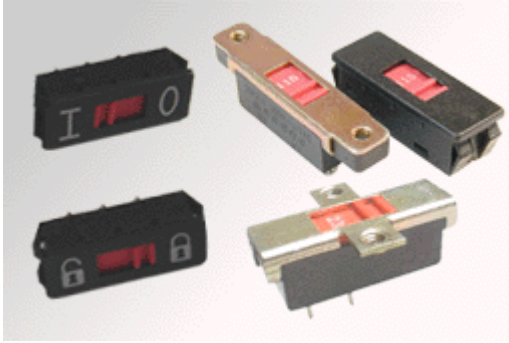


- 12A 125/250VAC (UL, CSA)
- 10(1)A 250V~μT85 (VDE, ENEC, CQC)
- Contact resistance : 20m ohm (MAX).
- Insulation resistance : 100M ohm (MIN), DC 500V
- Dielectric strength : 1000VAC FOR 1 minute
- Base : PBT or Phenolic, UL rated 94V-2 min
- Frame : Steel
- Actuator : PBT+15%G.F, UL rated 94V-2 min
- Movable Contact : Silver plated Copper
- Terminals : Silver plated Copper
- Contact Spring : Spring steel



[How to order](#)



SL15-11(AJB)-31A

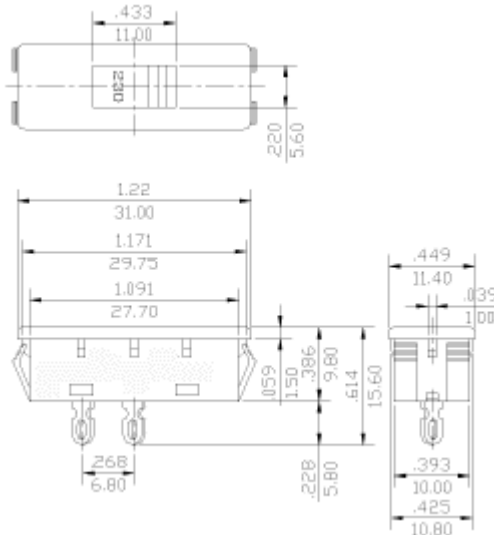

SL15-11(AMB)-21A

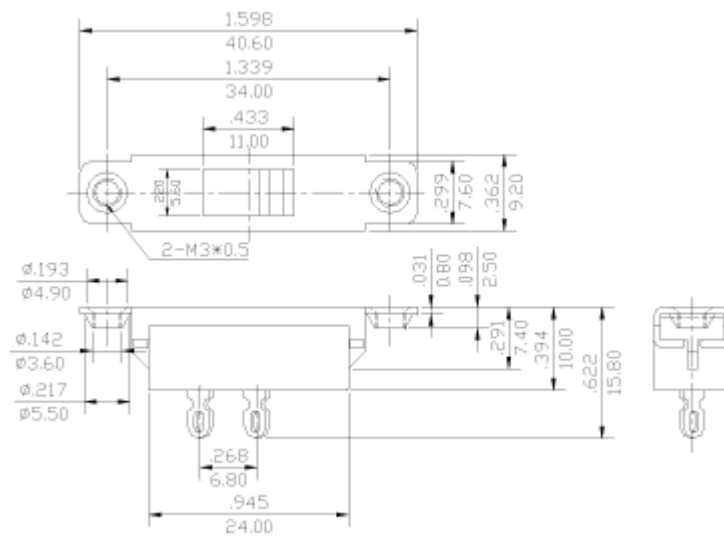

SL15-11(ASE)-11A

