








REV	DESCRIPTION	DRAWN/DATE	CHECK/DATE	APPROVED/DATE
A	NEW RELEASE	Lancy 06/05/04	Jason 06/05/04	David 06/05/04



TYPE	DIM.A
1	4.3
2	4.5
3	5.0
4	5.5
5	6.0
6	6.5
7	7.0
8	8.0
9	8.5
10	9.0
11	9.5
12	10.0
13	11.0
14	12.0
15	13.0
16	14.0
17	15.0



CIRCUIT DRAWING

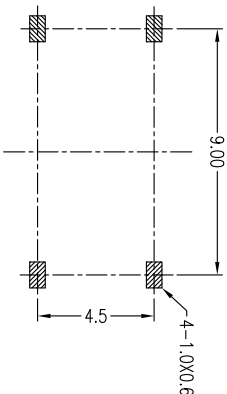

- TECHNICAL PARAMETER:
1. RATING: 50mA DC12V
 2. CONTACT RESISTANCE: $\leq 50m\Omega$
 3. INSULATION RESISTANCE: $\geq 100M\Omega$
 4. DIELECTRIC STRENGTH: 500V 50HZ 1min
 5. OPERATING FORCE: 160/260 $\pm$ 50gf
 6. MECHANICAL LIFE: 100,000 ORDER
 7. TRIP: 0.25 $\pm$ 0.1mm

P.C.B. LAYOUT1						
		GENERAL TOLERANCE		ANGLE TOLERANCE		
		X.	±0.38	X°	±3.0°	 东莞市福顺电子科技有限公司 DONGGUAN FOSEN ELECTRONICS TECHNOLOGY CO.,LTD
		.X	±0.25	X°	±2.0°	
		XX	±0.13	XX°	±1.0°	
		XXX	±0.05			
		MAJOR (QC CHECKED) : ▲ = 1 Pieces CONTROL POINT FA : to CRITICAL (Cpk & Cp) : [X] = Pieces				
		SCALE 1 : 1			DESIGN DATE	
		UNIT mm			Lancy 06/05/04	
					CHECK DATE	TITLE 6.0X6.0mm NUDGE SWITCH SERIES FSTS-1302 (CUSTOMER ASSEMBLY DRAWING)
					Jason 06/05/04	
					APPROVED DATE	
					David 06/05/04	
		SHEET 1 OF 2			SERIES NUDGE SWITCH SERIES	
					DRAWN NO	SIZE
					FS-C-TS-1302-00-08	A4
					REV	A
5	SPRING	1	FS-TS-1302-05-00	FS-TS-1302 SPRING	SUS301	/
4	BUTTON	1	FS-TS-1302-04-00	FS-TS-1302 BUTTON	PPA	BLACK
3	COVER	1	FS-TS-1302-03-00	FS-TS-1302 COVER	SPCC	PLATING NICKEL
2	CONTACT	1	FS-TS-1302-02-00	FS-TS-1302 CONTACT	BRASS	PLATING SILVER
1	HOUSING	1	FS-TS-1302-01-00	FS-TS-1302 HOUSING	PPA	BLACK
ITEM	PART NAME	QTY/EA	DRAWING NO	PART NUMBER CODE	MATERIAL	FINISH

P.C.B. LAYOUT