



ROHS

REV	DESCRIPTION	DRAWIN/DATE	CHECK/DATE	APPROVED/DATE
A	NEW RELEASE	YC.CHEN 25/10/09		


TECHNICAL PARAMETER;

1. RATING: 50mA DC12V
2. CONTACT RESISTANCE: $\leq 100\text{m}\Omega$
3. INSULATION RESISTANCE: $\geq 100\text{M}\Omega$
4. DIELECTRIC STRENGTH: 250V 500HZ 1Min
5. OPERATING FORCE: 100/160/230/260 $\pm 50\text{gf}$
6. MECHANICAL LIFE: 100,000 ORDER

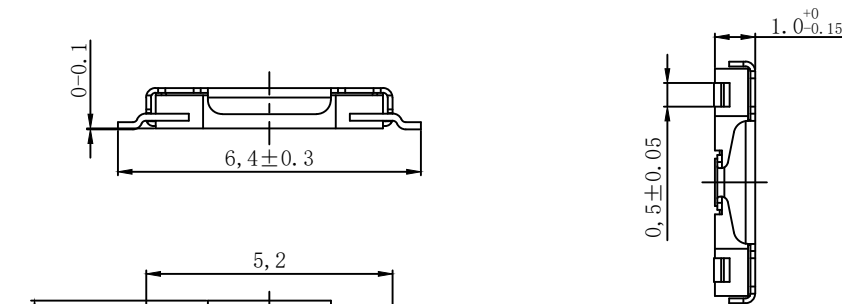


电器原理图

P C B 参考图

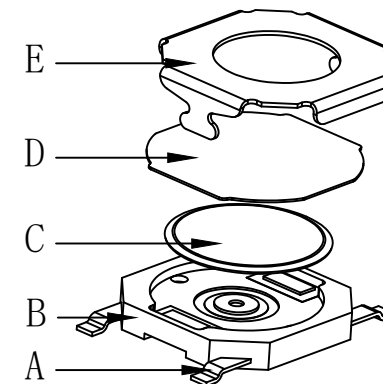

BILL OF MATERIAL :

E	盖 板	1	FS-TS-1504-00-05	TS-1504 盖 板	SUS	/
D	防尘膜	1	FS-TS-1504-00-04	TS-1504 防尘膜	聚酰亚胺	yellow
C	簧 片	1	FS-TS-1504-00-03	TS-1504 簧 片	SUS	D.Ag
B	基 座	1	FS-TS-1504-00-02	TS-1504 基 座	PPA	/
A	卡 件	1	FS-TS-1504-00-01	TS-1504 卡 件	BRASS	D.Ag
ITEM	PART NAME	Q'TY/EA	DRAWING NO	PART NUMBER CODE	MATERIAL	COLOUR

GENERAL TOLERANCE		ANGLE TOLERANCE		 东莞市福顺电子科技有限公司 DONGGUAN FOSEN ELECTRONICS TECHNOLOGY CO.,LTD		
X.	±0.35	X.°	±3.0'			
.X	±0.25	.X°	±2.0'			
.XX	±0.15	.XX°	±1.0'			
.XXX	±0.10					
MAJOR (QC CHECKED) : ▼ = 2 Places		SCALE 1 : 1		DESIGN YC.CHEN	DATE 25/10/09	TITLE: 4×4mm 无钮
CONTROL POINT FAI : to		UNIT mm		CHECK JX.ZHOU	DATE 25/10/09	FSTS-1504
CRITICAL (Cpk & Cp) : [X] = Places						
SHEET 1 OF 1				APPROVED David YU	DATE 25/10/09	SERIES: NUDGE SWITCH SERIES SIZE A4
						DRAWIN NO: FSTS-1504-00-00 REV A