
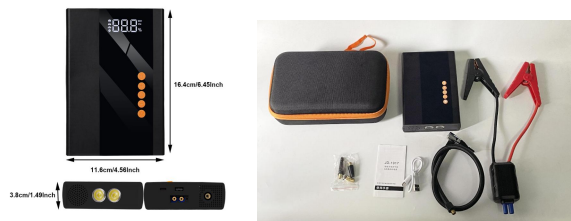



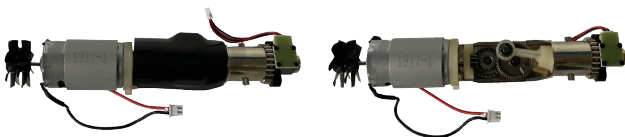


# Dongguan Zhongfeng Electronic Technology Co., Ltd.

Address: No.16, Lu Yi Bu Wei, Tianxin Village, Tangxia town, Dongguan City, Guangdong Province  
Web: [www.kajiad.com](http://www.kajiad.com); <https://zhongfeng.manufacturer.globalsources.com>  
Email: [sales@kajiad.com](mailto:sales@kajiad.com)  
Tel: +86-769-87290355

## Specification

| Product Name |                                                                                        | Automobile jump starter with air compressor | Part No.                                                                             | 1916 | Date | 11/Feb/23 | Version | A0 |
|--------------|----------------------------------------------------------------------------------------|---------------------------------------------|--------------------------------------------------------------------------------------|------|------|-----------|---------|----|
| No.          | Item                                                                                   |                                             | Specifications                                                                       |      |      |           |         |    |
| 1            | Rated voltage                                                                          |                                             | DC 12V                                                                               |      |      |           |         |    |
| 2            | Rated power                                                                            |                                             | 120W                                                                                 |      |      |           |         |    |
| 3            | Max. current                                                                           |                                             | 10A                                                                                  |      |      |           |         |    |
| 4            | Max. pressure                                                                          |                                             | More than 100PSI/6kg                                                                 |      |      |           |         |    |
| 5            | Operation current                                                                      |                                             | ≤10A                                                                                 |      |      |           |         |    |
| 6            | Start/Peak current                                                                     |                                             | 300A / 500A                                                                          |      |      |           |         |    |
| 7            | Time for inflating 195/65R15 tires 0~35psi                                             |                                             | <10M 30S(for reference)                                                              |      |      |           |         |    |
| 8            | Time for inflating 35L tank 0~2.5bar                                                   |                                             | <14M(current <10A)                                                                   |      |      |           |         |    |
| 9            | Cycle life                                                                             |                                             | 500H                                                                                 |      |      |           |         |    |
| 10           | Deflate nozzle                                                                         |                                             | Yes                                                                                  |      |      |           |         |    |
| 11           | Light                                                                                  |                                             | Strong,flashing light                                                                |      |      |           |         |    |
| 12           | Input                                                                                  |                                             | Type-C 5V/2A                                                                         |      |      |           |         |    |
| 13           | Output                                                                                 |                                             | USB 5V/2A                                                                            |      |      |           |         |    |
| 14           | Tracheal length                                                                        |                                             | 500mm ((EPDM-Black outer woven rubber hose))                                         |      |      |           |         |    |
| 15           | Start                                                                                  |                                             | Button                                                                               |      |      |           |         |    |
| 16           | Tire pressure display                                                                  |                                             | Digital display                                                                      |      |      |           |         |    |
| 17           | Automatic shutdown                                                                     |                                             | Shutdown after 40s without operation                                                 |      |      |           |         |    |
| 18           | Full power (inflate<8PSI)                                                              |                                             | Can work over 1H continuously                                                        |      |      |           |         |    |
| 19           | Support mobile phone charging or not                                                   |                                             | Support                                                                              |      |      |           |         |    |
| 20           | Set mode                                                                               |                                             | Car, motor, bicycle and ball mode                                                    |      |      |           |         |    |
| 21           | Smart start clip                                                                       |                                             |   |      |      |           |         |    |
| 22           | Outer dimensions/accessories                                                           |                                             |  |      |      |           |         |    |
| 23           | Battery18650、10000mAh                                                                  |                                             |   |      |      |           |         |    |
| 24           | Air compressor movement/Variable speed level three/Motor 390/Rotational speed 12000rpm |                                             |  |      |      |           |         |    |
| 25           | The gear                                                                               |                                             | The gear with 48 tooth/20 tooth/23 tooth/9 tooth, inflator life is 500H              |      |      |           |         |    |
| 26           | Working temperature                                                                    |                                             | -20℃~ +80℃                                                                           |      |      |           |         |    |
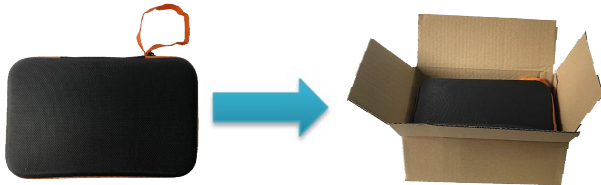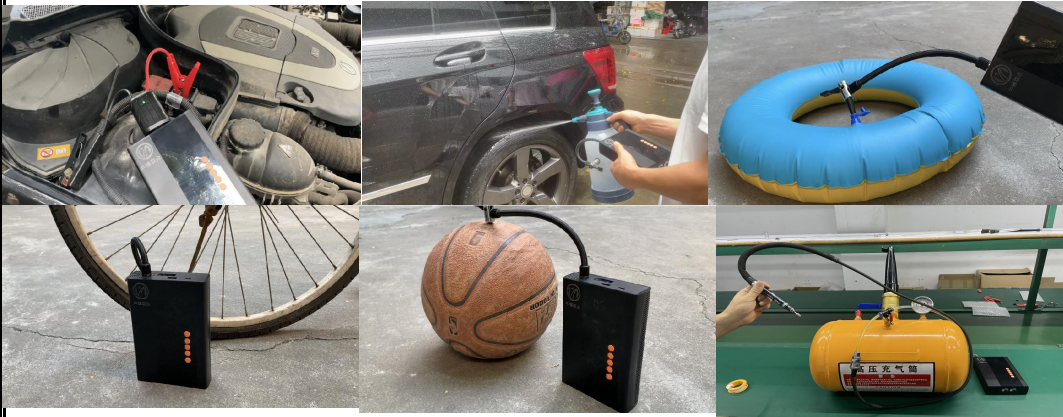
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                  |                                                                                   |                  |            |             |            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|-----------------------------------------------------------------------------------|------------------|------------|-------------|------------|
| 27                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Package          |  |                  |            |             |            |
| 28                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Main body weight | N.W.:                                                                             | 635±30 g         | G.W.:      | 0.8 kg      |            |
| 29                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Carton size      | C/N:                                                                              | 24.6x17.9x8.8 cm | Color box: | 24.5x16x7cm |            |
| <p>Instructions: The body is designed for multi-stage speed change gear, the running speed is medium speed, the tire inflation time is slower, but can be used continuously, save electricity, strong torque, and can be applied to cars, motorcycles, electric vehicles, bicycles, basketball, balloons and other inflation equipments.</p> <div data-bbox="129 501 1197 916"></div> |                  |                                                                                   |                  |            |             |            |
| Maker                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                  | Sharry Chen                                                                       |                  | Approver   |             | Xinyi Chen |