






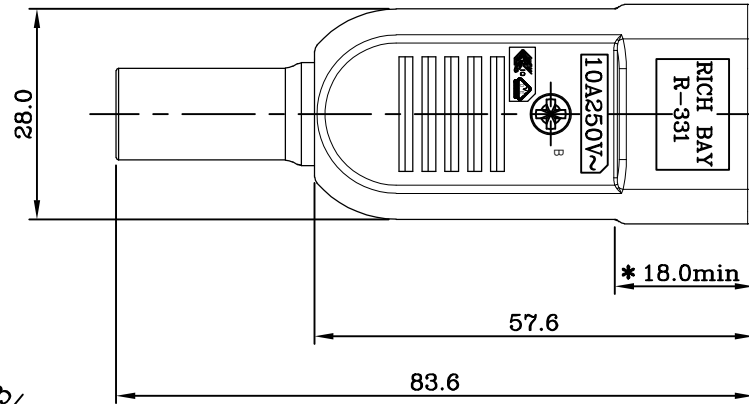


建議剝線尺寸


SPECIFICATION:

1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-2~V-0.
4. The intended flexible cord:
 - a. Cord Size - 18AWG ~14AWG
 - b. Total Number of conductors-3 conductors
 - c. Overall cord diameter -8.0mm

Rating: AC 10A 250V	
Mark	Safety Regulation
	ENEC
	VDE
Rating: AC 15A 250V	
Mark	Safety Regulation
	CULUS

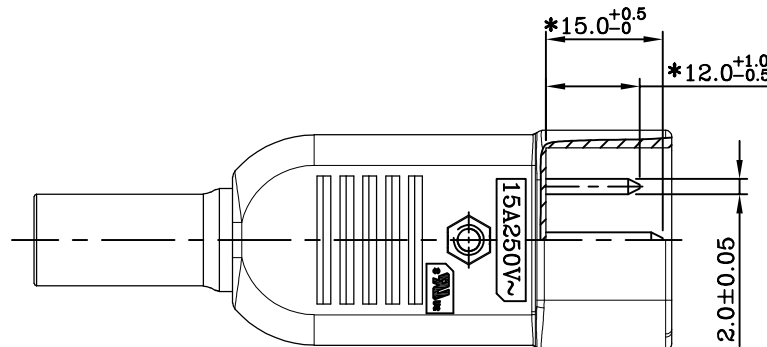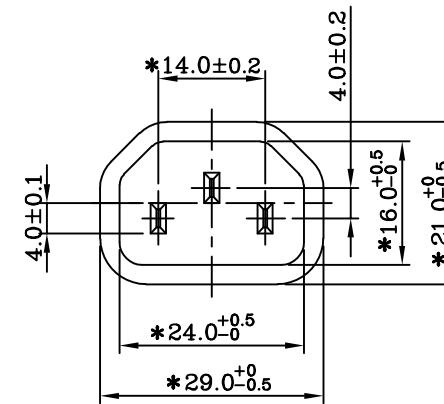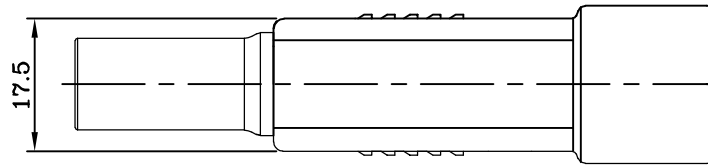

WIN-KARE TECHNOLOGY CO.,LTD



DRAWN BY

UNIT
mm

李

2023.03.09

小英

UNIT Q'TY
1

APPROVED BY

SCALE
1:1

朱

2023.03.09

显德

TOLERANCE
X.XX±0.1
XX.XX±0.2
XXX.XX±0.3

ID NO

23030903Q

DESCRIPTION

PRODUCT NO.

R-331(B202)

INTERIM NO.

NEW NO.

REV

D