
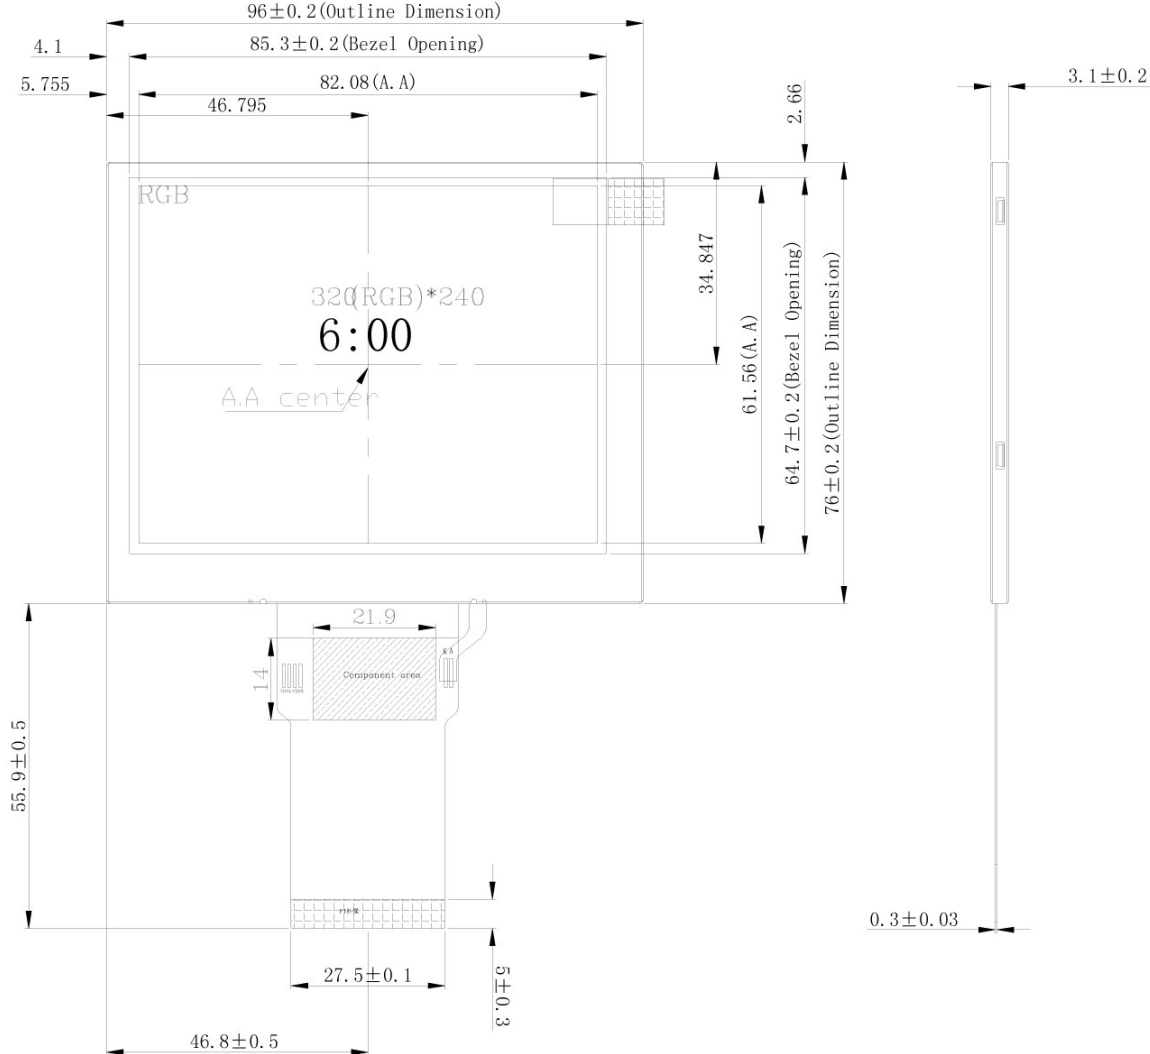


LED CIRCUIT DIAGRAM
9.6V@60mA

NOTES:

- General Tolerance: ±0.2
- () reference dimension.
- Recommended Case Open Area Should Be Less Than Module V.A
- recommended cushion adherent area:TP V.A+1.6mm
- ROHS MUST BE COMPLIANT

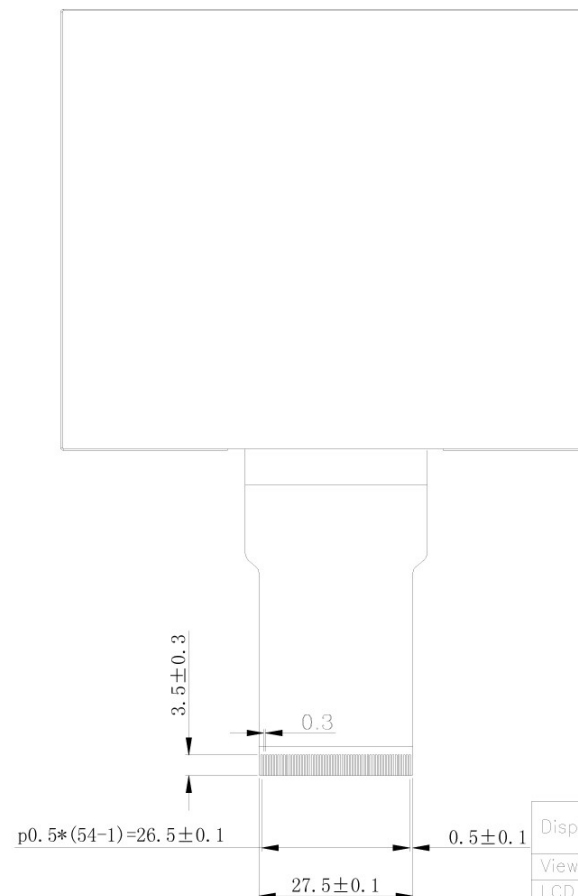

PIN	SYMBLE
1	VBL-
2	VBL-
3	VBL+
4	VBL+
5	NC
6	NC
7	NC
8	RESET
9	CS
10	SCL
11	SDI
12	B0
13	B1
14	B2
15	B3
16	B4
36	HSYNC
37	VSYNC
38	DOTCLK
39	NC
40	NC
41	VCC
42	VCC
43	NC
44	NC
45	NC
46	NC
47	NC
48	NC (XR)
49	NC (YD)
50	NC (XL)
51	NC (YU)
52	DEN
53	GND
54	GND
17	B5
18	B6
19	B7
20	G0
21	G1
22	G2
23	G3
24	G4
25	G5
26	G6
27	G7
28	R0
29	R1
30	R2
31	R3
32	R4
33	R5
34	R6
35	R7

Display Type	TFT
Viewing Angle	6 O'CLOCK
LCD Driver IC	ILI9322
Operating Voltage	VCC=2.8V
Driver Method	--
Operation Temperature	-10°C TO 60°C
Storage Temperature	-20°C TO 70°C
Interface	24-BIT RGB/MCU
Backlight	9-CHIP WHITE LED
Surface luminance	250cd/m ² (TYP.)
White X/Y	---



东莞市精进光电有限公司
Jingjin Optoelectronics Co., Ltd.

DRAWN		UNIT	Customer NO.
		mm	
CHECKED	SCALE	NO.	Part NO.
	1:1	1/1	JTA401402701T1
APPROVED	DATE	VERSION	TITLE
		A	OUTLINE