
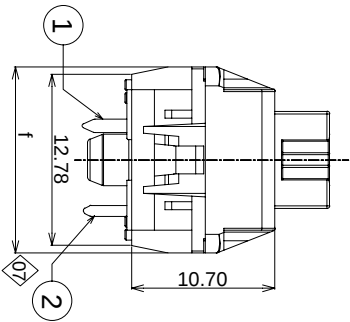
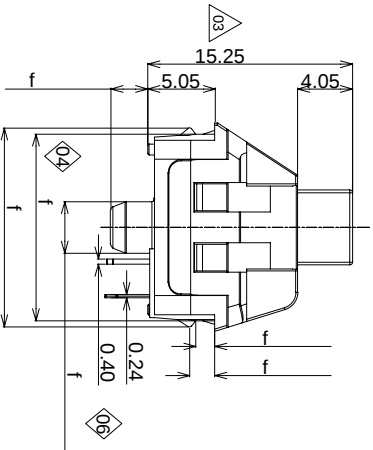

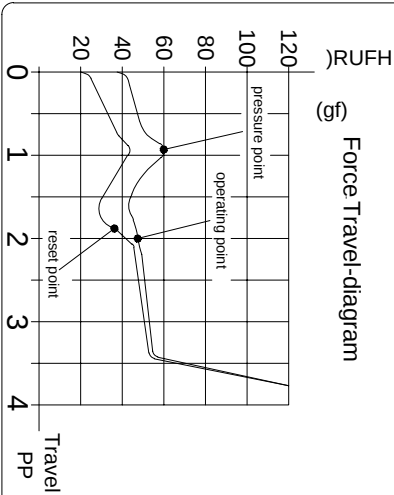





6SHFLFLFDWLRLQ
5DWLQJ 9\$&'& PDJ 9'& PLQ
P\$ \$&'& PDJ -\$& PLQ
&RQWDFW 5HVLVWDQFH P!ODJ
,QVXODWLRLQ 5HVLVWDQFH 0!OLQ
(DC500V)
:LWKVWDQ 9ROWDJH \$& 9 +]
for 1 minute
%RXQH 7LPH PVHF DW LQ VHF
actuation speed)
2SHUDWLRLQ)RU FH f JI
7DFWLOH)RU FH f JI
3UH WUDYHO PP PP
7RWD WUDYHO f PP
5HWXUQ)RU FH JI
2SHUDWLRLQ/LH &FOHV



⑦	Base	—	1	PA66+15%GF	blue	—
⑥	contact	—	2	Composite gold	—	—
⑤	Spring	—	1	Stainless Steel	—	—
④	Cover	—	1	PC	Light green	—
③	Keystroke	—	1	POM	White	—
②	static plate	—	1	Copper Alloy	Plating Sn	—
①	movable plate	—	1	Copper Alloy	—	—
ITEM	PART NAME	TERNO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS

DRAWN Zeng Yu 202406.20

CHECKED

APPROVALS

KAIHUA ELECTRONICS CO.,LTD
Kaih

TITLE: PG1518 key switch (balloon flower stalk)

PART NO: CPG151801S138

TOLERANCES ARE 30 < L 1' 5' < 10 1' 15 1' ANGLE UNIT: mm SCALE: 1:1 PROJ: 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
5	A		NEW			