

成品料號說明

12AXX-S09F-LSS-AX

XX: Pin 數

A: A Code

D: D Code

1: Key 45°

2: Key 90°

請參照
Pin Assignment

Front View
for all pins

Right View
for fewer than 10pins

Right View for 12~17pins.

Bottom View
for fewer than 10pins

Bottom View for 12~17pins.

Material:

① Connector:

* Waterproof Rate: IP67

* Housing: Nylon+GF, Black.

* Female Pin: Copper Alloy, Gold Plated.

* Shield: Zinc Alloy, Nickel Plated.

② Screw Nut: Copper Alloy, Nickel Plated.







③ O-Ring: Silicone, Black.

④ O-Ring: Silicone, Black.

Recommendation:

* For Panel Thickness Max 4.5mm.

* Nut Torque: 6-8 Kgf.cm.

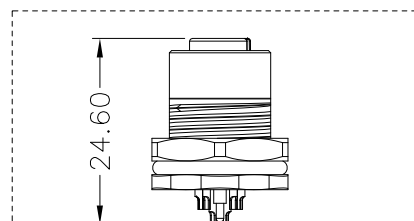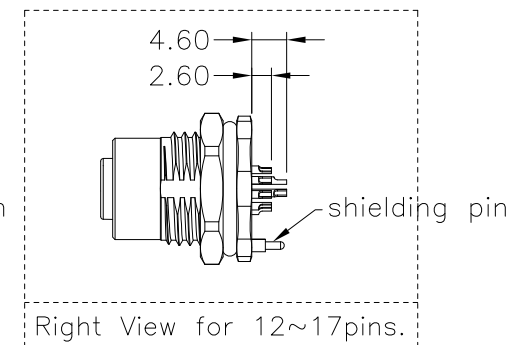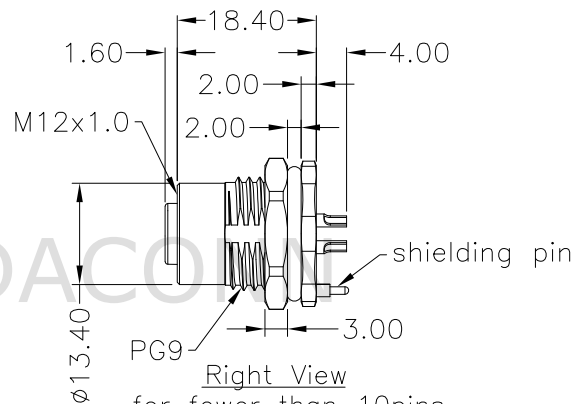

Panel Cut-out






*Wire range:		Current rating	Voltage rating
4pin	20~22#	4A	250V
5pin	20~22#	4A	60V
8pin	22~24#	2A	30V
12&17pin	24~26#	1.5A	30V



All dimension in mm	
TOLERANCE UNLESS OTHERWISE SPECIFIED	REV. A
.X ±0.25	SCALE 1:1
.XX ±0.1	
.XXX ±0.05	
ANGLES ±1°	

DRAWN BY Doreen	APPROVED BY Roy	DATE(Y/M/D) 2018/12/04	PAGE 1/1	SIZE A4
PART NO: 12AXX-S09F-LSS-AX		TITLE M12 A-CODE FEMALE PANEL TYPE		
CUSTOMER NO:				

THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF Tmyn. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Prodaconn.

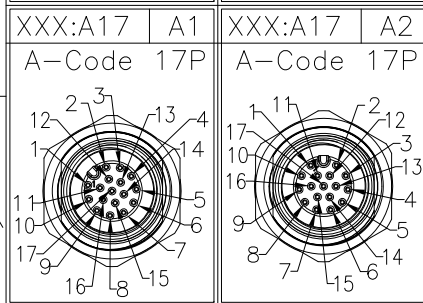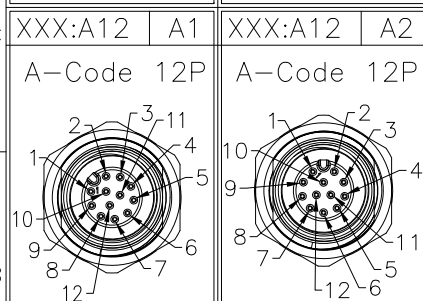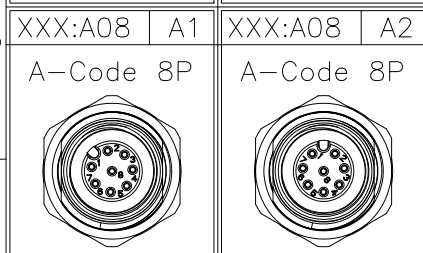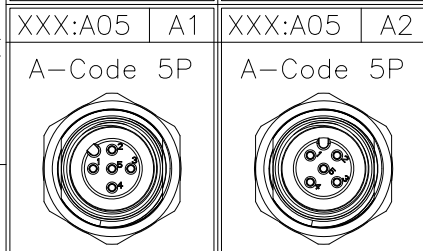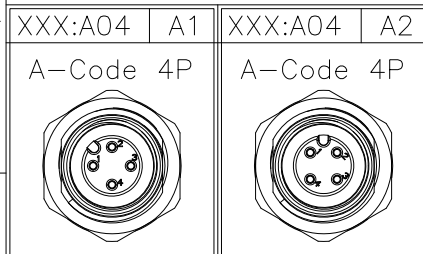

Pin Assignment