

Appendix 2 DSQ-10, DSQ-100, DSQ-200 Solenoid Valve Timer

Features

- 1.To fit the solenoid valve, get the system medium released at regular time
- 2.Applicable ambient temperature:-40~75℃
- 3.Normal voltage: AC24~240V 50/60Hz, DC24~240V, other voltages can be customized in batches
- 4.Protection grade:IP65



Z131-25BIb02- π



DSQ-10




DSQ-100



DSQ-200

Outline Dimension&Button Function Instruction

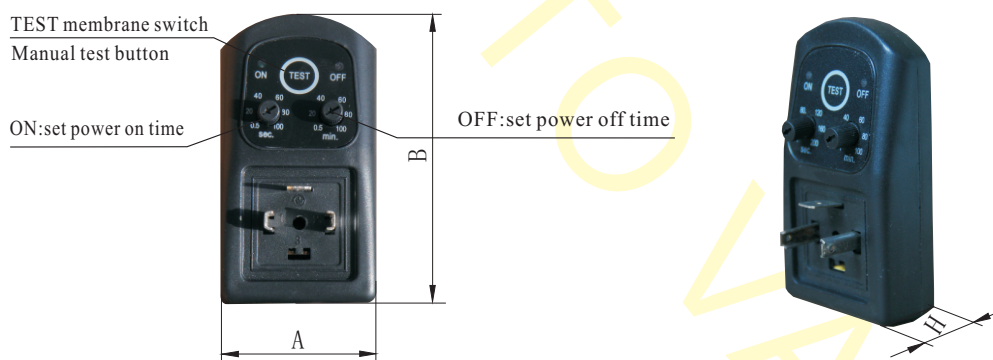

- Notes: 1. Press TEST membrane button(manual test button), timer starts to execute ON(power on time). operation;
2. Check periodically and wash the solenoid valve core, make sure the timer works properly.

Parameter&Dimension

Model	ON:Power on time (Adjustable)	OFF:Power off time (Adjustable)	Dimension (A×B×H)
DSQ-10	1~10s	1~45min	44×80×21
DSQ-100	1~100s	1~100min	44×80×21
DSQ-200	1~200s	1~100min	44×80×21