


UL3302

BORT cable

RoHS & REACH compliant

环 保 引 领 未 来

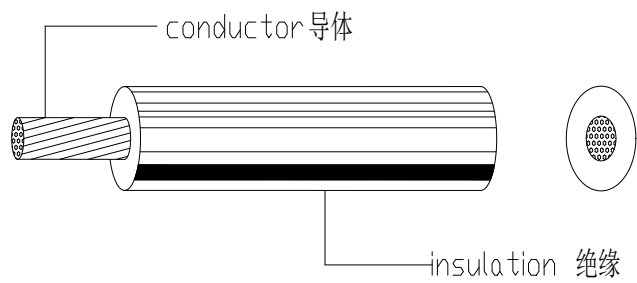

PRODUCT DESCRIPTION:

- ★Rated temperature:105℃
- ★Rated voltage:30V
- ★According to:UL Subject758,UL1581,C22.2
- ★Solid or stranded,tinned or bare copper conductor
- ★XLPE insulation
- ★Passes UL VW-1&CSA FT1 vertical flame test

Conductor		Finished product			Maximum Resistance at 20℃
AWG	NO.of Cond	Insulation Thick.	Outside Thick.	Packing	
	No./mm	mm	mm	m/r	Ω/mm
30	7/0.1	0.16	0.56	1220	354.33
28	7/0.127	0.24	0.81	1220	223.75
26	7/0.16	0.30	1.10	610	139.76