



ZnS Windows

- **Material:** ZnS
- **Surface Figure:** 1 λ@633nm
- **Parallelism:** <1'
- **Surface Quality:** 60-40 Scratch and dig
- **Diameter Tolerance:** +0.0/-0.1mm
- **Thickness Tolerance:** ±0.1mm
- **Chamfer:** Protective chamfer 0.2mmX45°
- **Coating:** see product list

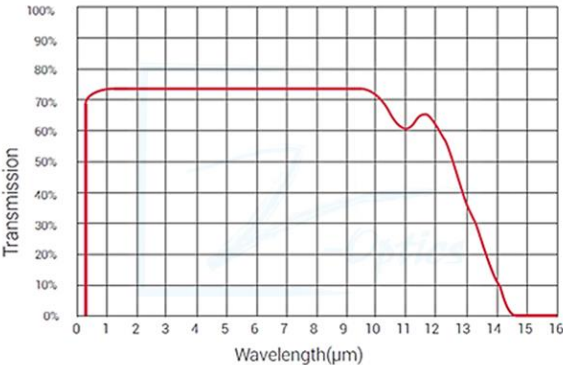

ZnS Transmission

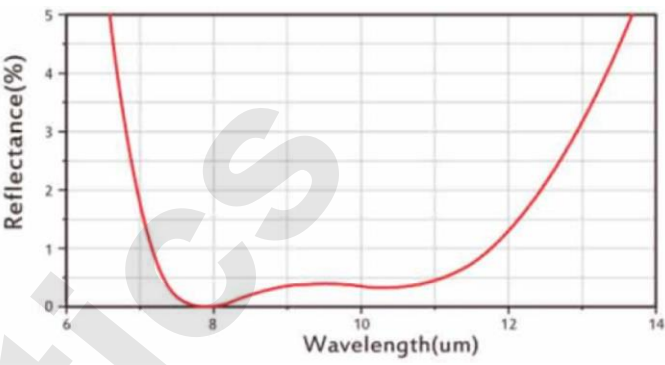

IR2 Coating @ 8~12μm

Part No	Diameter (mm)	Thickness(mm)	Coating
WIN0125-020-60-ZnS	12.5	2.0	none
WIN0125-020-60-ZnS	12.5	2.0	AR Ravg<1% 8~12μm
WIN0127-020-60-ZnS	12.7	2.0	none
WIN0127-020-60-ZnS	12.7	2.0	AR Ravg<1% 8~12μm
WIN0250-030-60-ZnS	25.0	3.0	none
WIN0250-030-60-ZnS	25.0	3.0	AR Ravg<1% 8~12μm
WIN0254-030-60-ZnS	25.4	3.0	none
WIN0254-030-60-ZnS	25.4	3.0	AR Ravg<1% 8~12μm
WIN0400-030-60-ZnS	40.0	3.0	none
WIN0400-030-60-ZnS	40.0	3.0	AR Ravg<1% 8~12μm
WIN0500-030-60-ZnS	50.0	3.0	none
WIN0500-030-60-ZnS	50.0	3.0	AR Ravg<1% 8~12μm

Unless otherwise specified, all dimensions are in mm

