


Terminal Blocks



- Polypropylene (PP) terminal housing with UL 94V-2 flame retardant grade.
- Zinc-plated steel contacts.
- Zinc-plated steel screws.
- Recessed screws and tubular contacts provide added safety and help prevent short circuits.
- Tubular contacts connect stripped solid or stranded wire with no crimping terminals and soldering required.
- 12-circuit modular construction with easy-cutting design (Pre-cutting is available upon request).

Cat No.	Color	Poles	Ratings & Wire Range (Cu)	Approvals	Packing
PA20P	White	12	32A 450V, T85°C 0,5-4 mm², Rigid/Flexible	CE	50 Pcs/Bag 500 Pcs/Ctn
			20A 300V, 65°C (149°F) 22-12 AWG, Sol/Str	US	
PA30P	White	12	41A 450V, T85°C 1-6 mm², Rigid/Flexible	CE	50 Pcs/Bag 500 Pcs/Ctn
			25A 300V, 65°C (149°F) 22-10 AWG, Sol; 14-10 AWG, Str	US	
PA40P	White	12	57A 500V, T85°C 2,5-10 mm², Rigid/Flexible	CE	40 Pcs/Bag 400 Pcs/Ctn
			30A 300V, 65°C (149°F) 18-10 AWG, Sol; 16-10 AWG, Str	US	
PA50P	White	12	76A 450V, T85°C 4-16 mm², Rigid/Flexible	CE	25 Pcs/Bag 250 Pcs/Ctn
PA60P	White	12	101A 750V, T85°C 10-25 mm², Rigid/Flexible	CE	10 Pcs/Bag 100 Pcs/Ctn

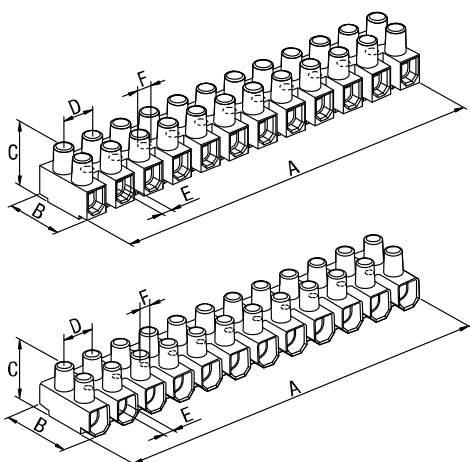

Cat. No.	Dimensions (Unit: mm)						Screw
	A	B	C	D	ØE	ØF	
PA20P	96.2	17.0	14.5	8.2	3.1	2.9	M2.6x5
PA30P	116.8	19.2	16.7	10.0	3.4	3.6	M3x6
PA40P	140.5	23.5	18.7	12.0	4.5	3.9	M3.5x7
PA50P	169.8	25.0	20.8	14.5	6.5	4.3	M4.0x9

Cat. No.	Dimensions (Unit: mm)						Screw
	A	B	C	D	ØE	ØF	
PA60P	193.5	36.0	26.1	16.5	7.0	4.2	M5.0x11