

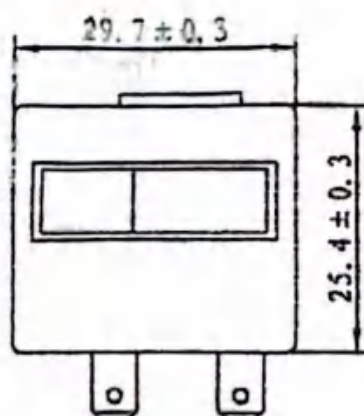
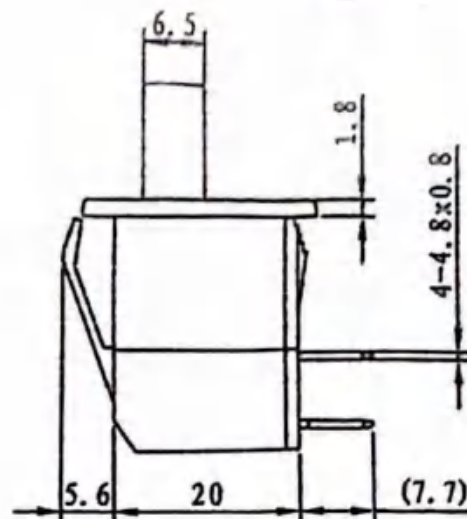


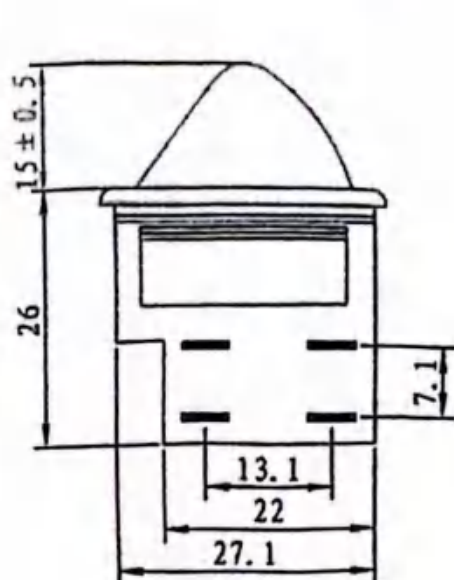

Electrical schematic

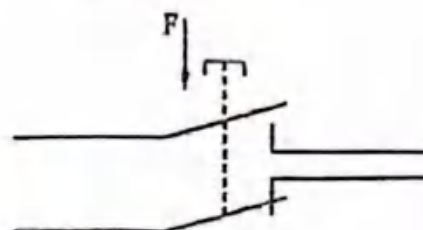

Remarks:

1. Outer Surface: Clean neat, no edge and no contraction.
2. Rated Voltage: AC250V.
3. Rated Current: 0.5A.
4. Contact Resistance: $\leq 50\text{m}\Omega$.
5. Insulation Resistance: More than $100\text{M}\Omega$ (with DC500V megger).
6. Cycles: 50000times;
7. Dielectric: AC1500V/1min, no breakdown and no flashover.

General tolerances for linear dimensions	
Basic size of section	Tolerance
$< 3\text{mm}$	± 0.1
$> 3 \sim 6\text{mm}$	± 0.2
$> 6 \sim 30\text{mm}$	± 0.2
$> 30 \sim 120\text{mm}$	± 0.3
$> 120 \sim 400\text{mm}$	± 0.5

Itemref	Quantity	Article No./Reference			
		APPROVED_BY_DATE	FILENAME	DATE	SCALE
		17/06/07	SHAPEPICTURE	2017/06/07	1:1
WIN-KARE Technology Co.,LTD		Door Switch			
		LTK-17(4PIN)		EDITION A	COLOR WHITE