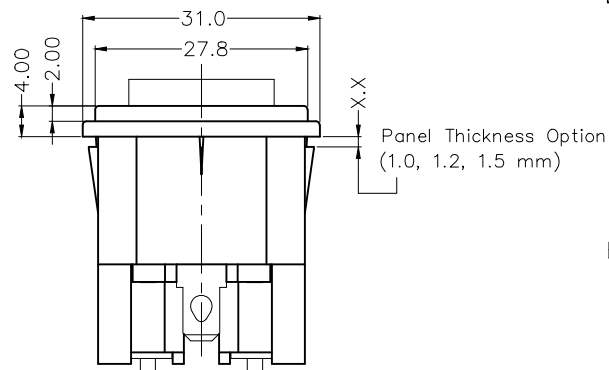
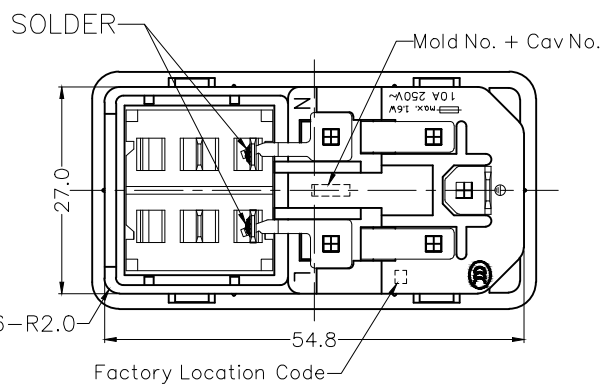
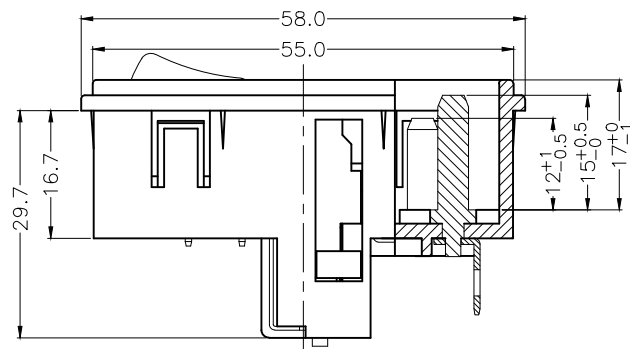
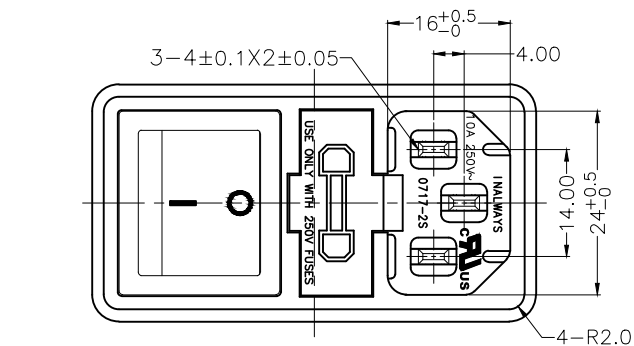


PANEL CUT-OUT

SPECIFICATION

A: MATERIAL:

1. HOUSING: PC, UL 94V-0
2. TERMINAL: COPPER ALLOY, TIN PLATED


B: CHARACTERISTICS:

1. RATING: 10A 250V~ NORTH AMERICA & EUROPE
2. INSULATION RESISTANCE: 100 MΩ MIN, AT 500 V DC
3. ELECTRIC STRENGTH: AC 2,000 V FOR 1 MINUTE

C: APPROVALS:

CUL, TUV, & CCC

D: DIAGRAM:

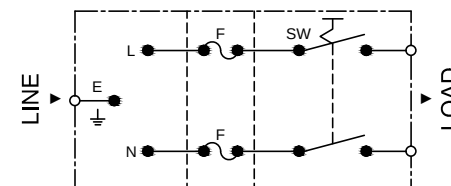

E: ORDERING INFORMATION:

P/N	PANEL THICKNESS	SOCKET'S TERMINAL	SWITCH'S TERMINAL
0717-2SPQ10-H	1.0 mm		
0717-2SPQ12-H	1.2 mm		
0717-2SPQ15-H	1.5 mm		

REV	DATE	DOCUMENT	DESCRIPTION
E			
D	2021.3.24	DGR21005	更改安规刻字
C	2018.8.3	DGR18007	DELETE ENEC MARK,ADD TUV SAFETY
B	2014.08.20	DGR14008	CHANGE SAFETY MARK
A	2013.04.30	DGR13007	NEW REVISION

深圳易凯达科技有限公司 WIN-KARE TECHNOLOGY CO.,LTD.				PART NO.: 0717-2SPQXX-H		NAME: AC INLET 3P + SWITCH & 2 FUSE (SNAP-IN)	
TOLERANCE UNLESS OTHERWISE MARKED DIMENSION: .000: ±0.1 .00 : ±0.2 .0 : ±0.3				MATERIAL: SEE ABOVE		SPEC.: IEC 60320-1, C14 IEC 60127-6	
A 4				UNIT mm	SCALE 1 : 1	SHEET 1 of 1	APPROVED
							CHECKED
							DESIGNER
							NOTE:
							DOC.#
							S717-0021