


FLRY-A

RoHS & REACH compliant

BORT cable

环保引领未来

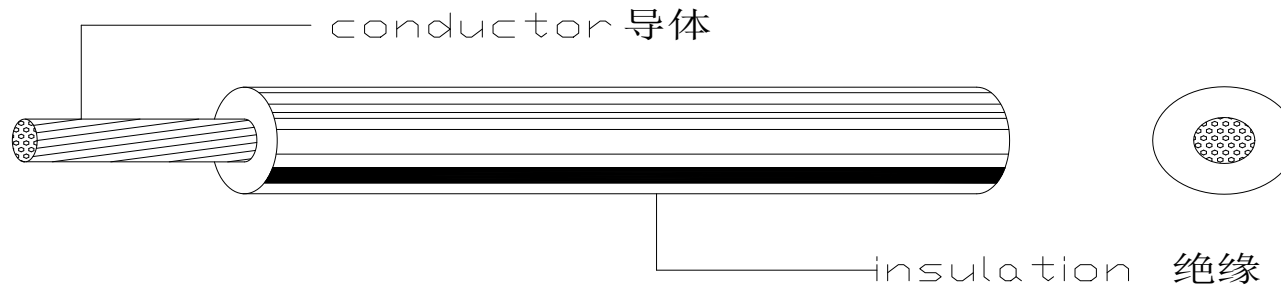

PRODUCT DESCRIPTION:

- ★ Rated temperature: 90℃
- ★ According to DIN 72551-6/1996
- ★ Concentric stranded, tinned or bare copper conductor
- ★ PVC insulation
- ★ Uniform insulation thickness of wire to ensure easy stripping and cutting
- ★ Resistant to oil, heat and abrasion
- ★ Internal wiring in automobile where high flexibility, thermo and mechanical strength are required

Conductor		Finished product			Maximum Resistance at 20℃
Cross Sectional Area	NO.of Cond	Insulation Thick.	Outside Thick.	Weight	
mm ²	No./mm	mm	mm	kg/km	Ω/mm
0.22	7/0.21	0.3	1.20	3.52	84.80
0.35	7/0.26	0.3	1.30	4.79	52.00
0.5	19/0.19	0.3	1.60	7.07	37.21
0.75	19/0.23	0.3	1.90	10.19	24.70
1	19/0.26	0.4	2.10	12.79	18.50
1.5	19/0.32	0.4	2.40	18.31	12.70

博尔特（漳州）电缆有限公司