

Shenzhen Linkwil Intelligent Technology Co.,Ltd

ADD: 5F/bldg D, Guanghaofeng Industry Park, Hangcheng Road, Gushu, Xixiang Town, Baoan District, Shenzhen City, Guangdong, China

Tel: +86-755-23281083

Web: www.linkwil.com

Email: sales1@linkwil.com

Model NO: Wireless IP Camera AR931




Features

- 720P (1280 x 720 pixels) HD wireless IP camera
- H.264 video compression
- Support ONVIF
- P2P (plug and play), with built-in free Manufacturer's DDNS
- Support remote Pan/Tilt control (Pan: 350° & Tilt: 130°)
- Support TF card storage
- Support WPS and press one button to finish wifi connection
- Support Iphone & mobilephone viewing, compatible with free APP
- Auto IR-LED (12 leds) illumination for night vision (up to 8 metres)
- With IR-CUT filter and High image & video quality
- Wi-Fi compliant with wireless standards IEEE 802.11b/g/n
- Support WEP, WPA and WPA2 Encryption
- Support IE/firefox/google/safari browser or any other standard browser
- Motion detection alert via email or upload image to FTP
- Built-in Mic & Speaker, Audio Jack for External Mic & Speaker

Specification

Image Sensor	Image Sensor	1/4" Color CMOS Sensor
	Display Resolution	1280 x 720 (1 Megapixels)
	Lens	f: 2.8 mm, F: 2.4 (IR Lens)
	Mini. Illumination	0 Lux
Lens	Lens Type	Glass Lens
	Viewing Angle	70° Degree (Horizontal: 350° & Vertical: 130°)
Audio	Input / Output	Supports two-way audio Built-in Mic & Speaker 3.5mm audio jack for external Mic & Speaker
	Audio Compression	G711/G.726
	Image Compression	H.264
Video	Image Frame Rate	30fps maximum, downward adjustable
	Resolution	720P (1280 x 720), VGA (640 x 480), QVGA (320 x 240)
	Flip Mirror Images	Vertical / Horizontal
	Light Frequency	50Hz, 60Hz or Outdoor
	Video Parameters	Brightness, Contrast
	Ethernet	One 10/100Mbps RJ-45
Communication	Supported Protocol	IP, TCP, UDP, HTTP, HTTPS, SMTP, FTP, DHCP, DDNS, UPnP, RTSP, WPS
	Wireless Standard	IEEE 802.11b/g/n
	Data Rate	IEEE802.11b: 11Mbps(Max.); IEEE802.11g: 54Mbps(Max.); IEEE802.11n: 150Mbps(Max.).
	Wireless Security	WEP, WPA, WPA2 Encryption
Size and Weight	Infrared Light	12 IR LEDs, Night visibility up to 8 metres
	Dimension	126(L) x 115(W) x 127mm(H)
	Gross Weight	679g (Color Box Size: 220x160x133mm)
	Net Weight	341g (accessories excluded)
Power	Power Supply	DC 5V/2.0A (EU, US, AU, UK adapter or other types optional)
	Power Consumption	5 Watts (Max.)
Environment	Operating Temperature	-20° ~ 55°C (-4°F ~ 131°F)
	Operate Humidity	20% ~ 85% non-condensing
	Storage Temperature	-20°C ~ 60° (-4°F ~ 140°F)
	Storage Humidity	0% ~ 90% non-condensing
PC Requirements	CPU	2.0GHZ or above (suggested 3.0GHZ)
	Memory Size	256MB or above (suggested 1.0GHZ)
	Display Card	64M or above
	Supported OS	Microsoft Windows 2000/XP/Vista, Windows 7/8
Certificate	Browser	IE 6.0, IE 7.0, IE 8.0 Firefox or other standard browsers
Warranty	CE, FCC, ROHS	
	Limited 1-year Warranty	

Installation Picture

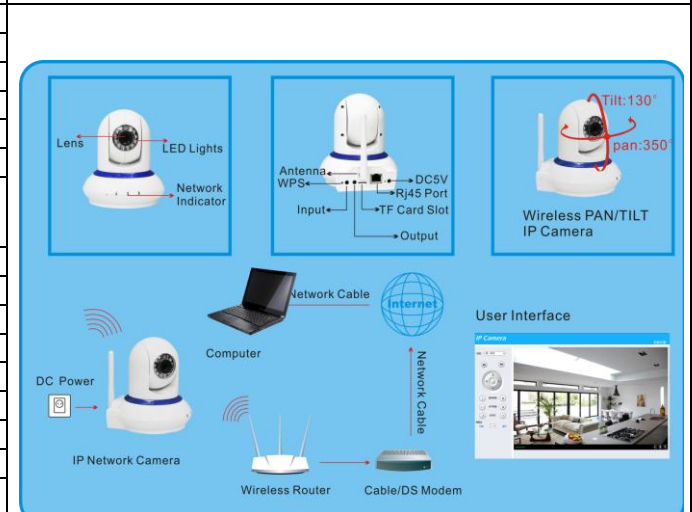

Packing List and Size



Packing: 20pcs/carton,
G.W: 15kg,
Accessories included in color box

