



Category

SWITCH

SOCKET

- INLET

- OUTLET

- IEC EMI FILTER

- RECEPTACLE

- PLUG

WIRE HARNESS

BREAKER

FUSE HOLDER

FUSE

ENCODER

INDICATOR

POTENTIOMETER


CONNECTOR

WATERPROOF CONNECTOR

WATERPROOF PARTS

PCBA

NEW PRODUCT

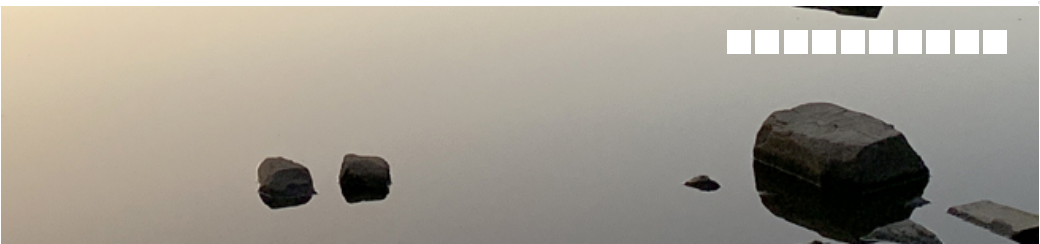

OUR PRODUCT

Home » Our Product » CW1D Series » CW1D Series

SOCKET / IEC EMI FILTER

CW1D Series IEC60320 C14 Inlet, with EMI Filter, 3A, 6A or 10A Rating in UL

Power entry module with EMI filter for electromagnetic protection
Approved by UL, CUL, CE & CQC
Standard C14 socket
Quick connect terminals
Mounted by screws



 ZOOM IN

PDF Download

Get Information

 Print this page

Feature



- Rated Voltage: 115V/250VAC
- Frequency: 50/60Hz
- Rated Current: 3A/6A/10A
- Operating Temp: -25~+85°C
- Dielectric strength: 1450VDC (line to line): 2250VDC(line to ground)/1 min.
- Max. Leakage Current line to ground:
 - 0.25mA 115VAC 60Hz
 - 0.45mA 250VAC 50Hz

Specification

How to order




PART/NO. □□:03,06,10(A)	CX (uF)	CY (pF)	R (MΩ)	Lg (μF)	SCHEMATIC
CW1D-□□A-T(00)	0.1	3300	1.0	100	1
CW1D-□□A-T(01)					2
CW1D-□□A-T(02)					3
CW1D-□□A-T(03)		2200	1.0	100	2
CW1D-□□A-T(04)					3
CW1D-□□A-T(05)					1
CW1D-□□A-T(06)	0.047		1.0		2

L(mH):01A:3.7 03A:1.8 06A:0.8 10A:0.3

Products Search

Search



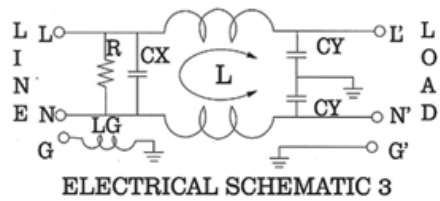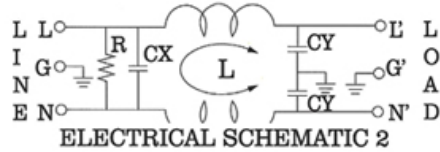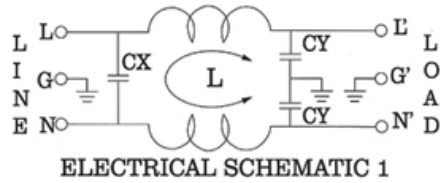


Min.Insertion Loss (dB) in 50 ohm system


Comm.Mode(L-G)in MHz							Diff.Mode(L-L)in MHz					
Amt	0.15	0.5	1	5	10	30	0.15	0.5	1	5	10	30
1A	34	38	40	32	28	11	9	25	37	51	62	23
3A	28	36	39	45	48	39	9	19	27	58	65	26
6A	19	29	36	49	53	39	8	18	25	57	60	32
10A	14	18	22	38	49	42	7	42	64	58	49	30

Item

Standard case drawing

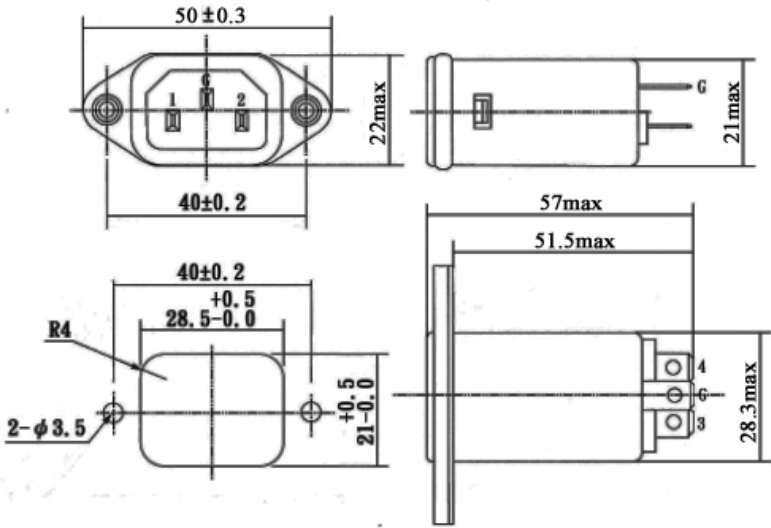

Big case drawing

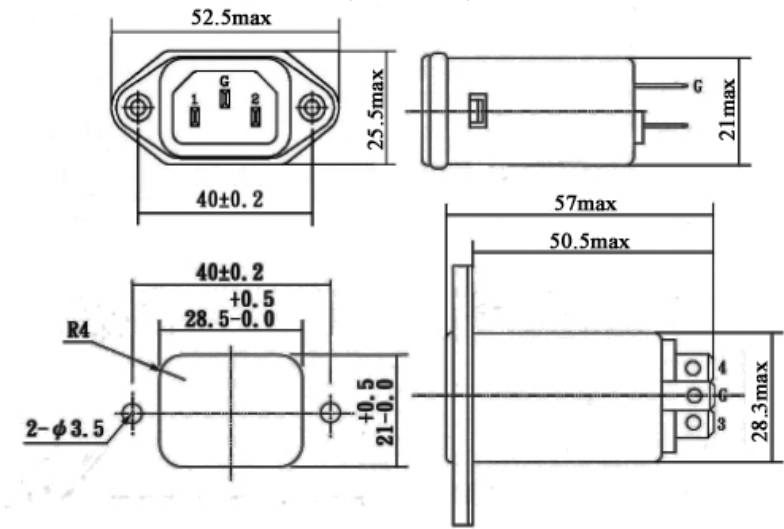

◀ BACK



5F., No.10, Lane 218, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, R. O. C.
Tel: +886-2-29161263 Fax: +886-2-29117574 canal@c-components.com.tw

©2009 Canal Components Inc. All Rights Reserved