



TECHNICAL SPECIFICATIONS

Luminaire luminous flux	up to 9,280 lm	up to 12,480 lm
System power	58 W	78 W
Length	1500mm	2000mm
Luminous efficacy	up to 160 lm/W	
Beam angle	60°/90°/SL:90°/25°D/25°D*2	
CCT	3000K/4000K/5000K/6500K	
Switching cycles	>500,000	
Colour rendering index	>83	
Colour tolerance	<5 SDCM	
Service life	>50,000 h [L80, B10]	
Weight	2.2-2.4 kg	3.0-3.2 kg
AC voltage range	220-240 V AC, 50/60 Hz	
DC voltage range	176-264 V DC	
Operating temperature	-20°C to +50°C	
Conductor wiring	6 x 1.5 mm², 1 x 2.5 mm²	
Connection	Plug: 7-pin, max. 2.5 mm²	
UV resistance	conditional	
Dimmable	DALI/Slide switch	
Degree of protection	IP 54	
Impact resistance	IK08	
Suitable for use in food areas	yes	
Cover	clear (30°, SL)/diffused (90°)	
Housing colour	Aluminium/white	
Housing material	Aluminium/PC	
Luminaires per B10A conduit protection	36	27
Luminaires per C10A conduit protection	36	27
Luminaires per B16A conduit protection	57	42
Luminaires per C16A conduit protection	57	42
Protection class	I	

PRODUCT SIZE

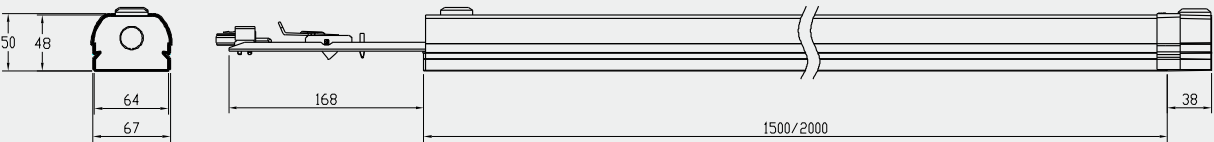

PACKAGE INFORMATION

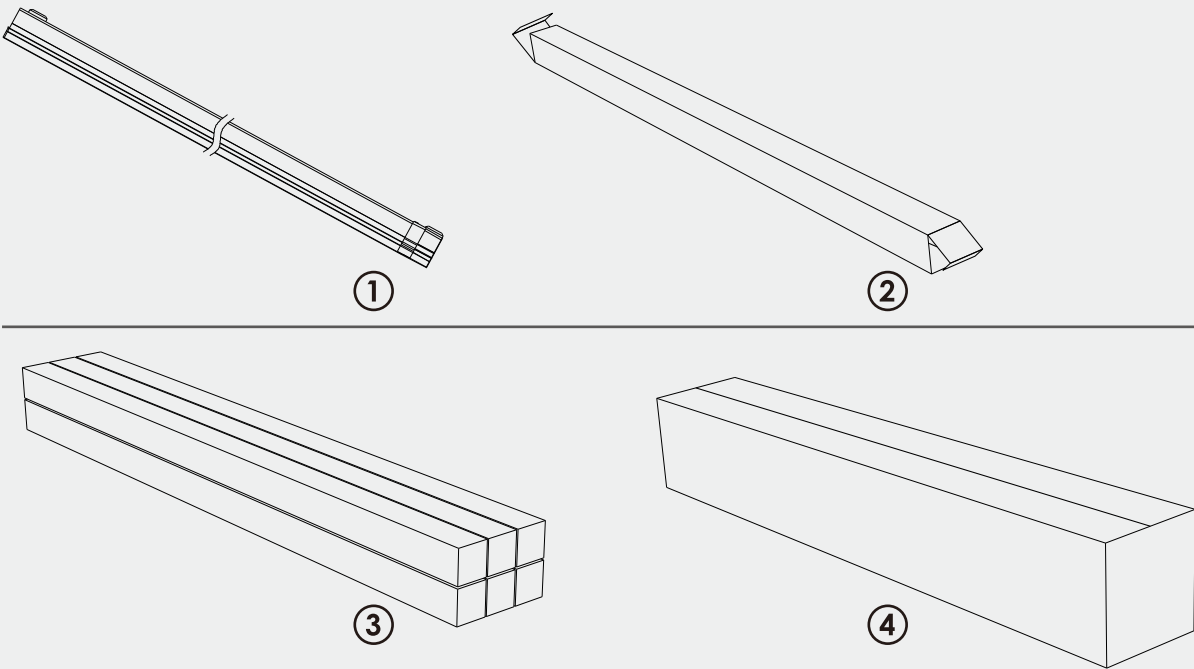

Length(mm)	N. W (kg)	G. W (kg)	Qty per carton	Outer Carton Dimensions(mm)
1500mm	13.2	16	6pcs	1756*297*145
2000mm	17.3	20.1	6pcs	2233*297*145