

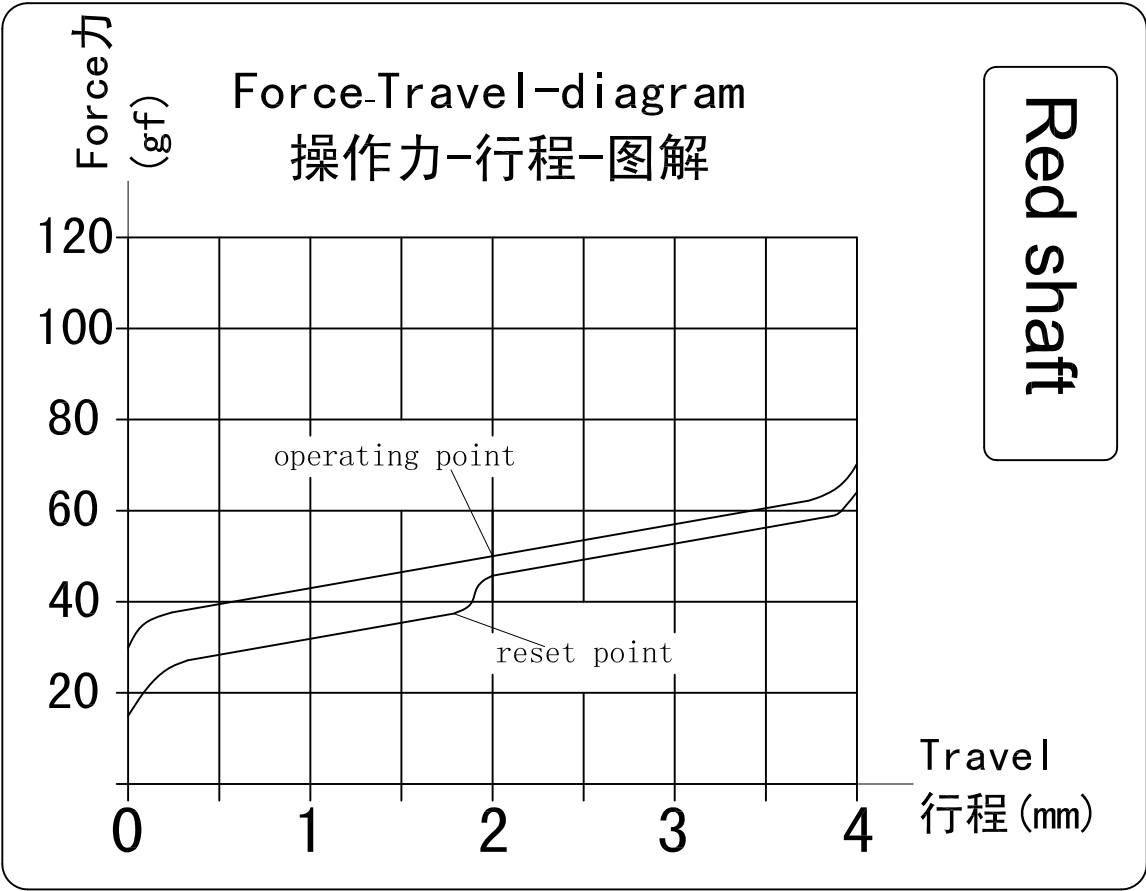
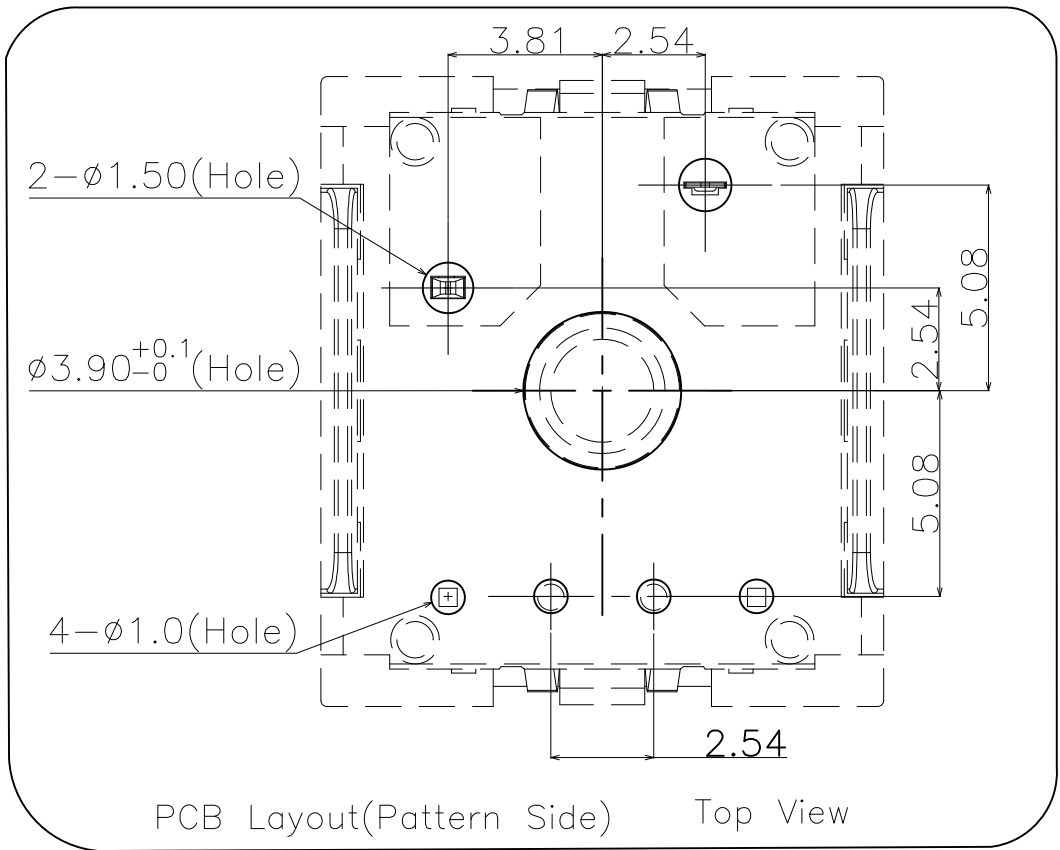
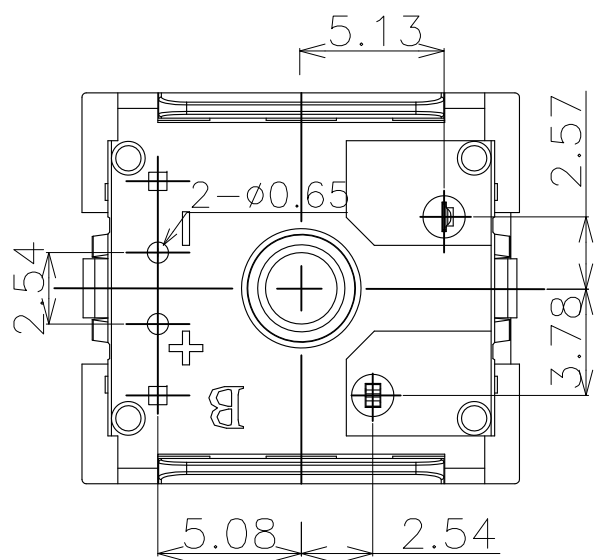
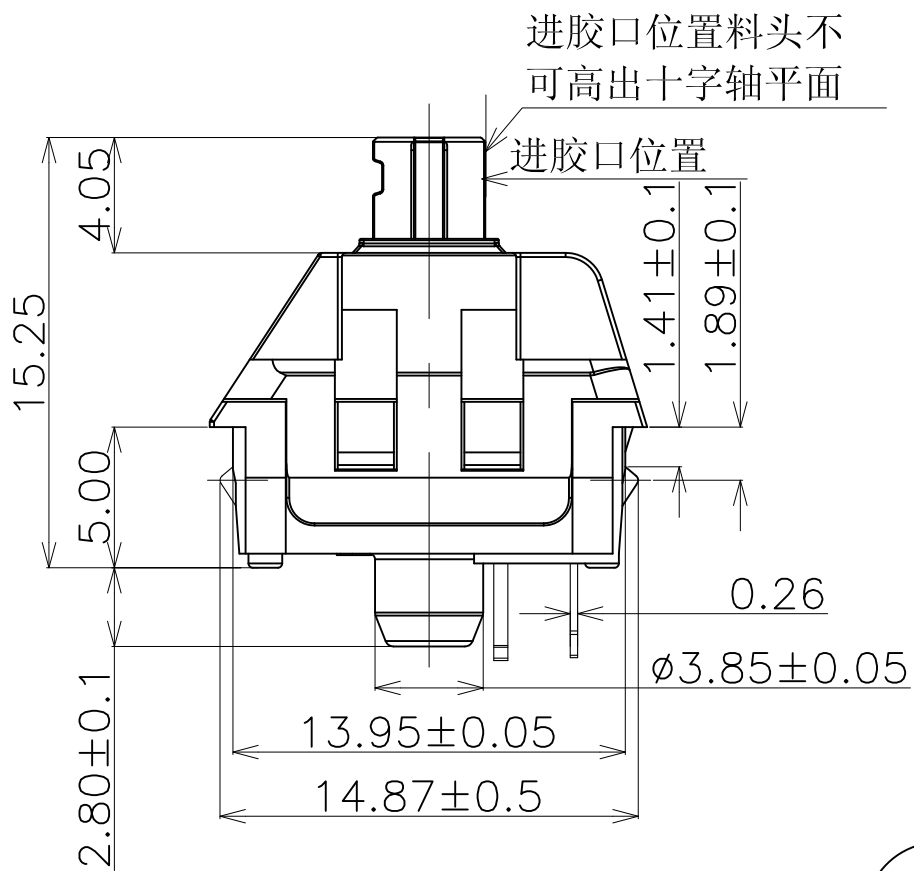





Red shaft

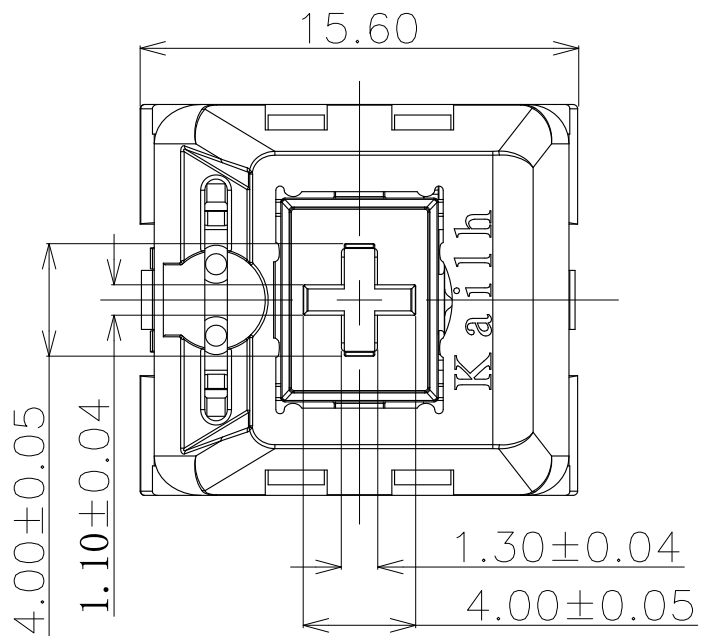

SWITCH FUNCTION

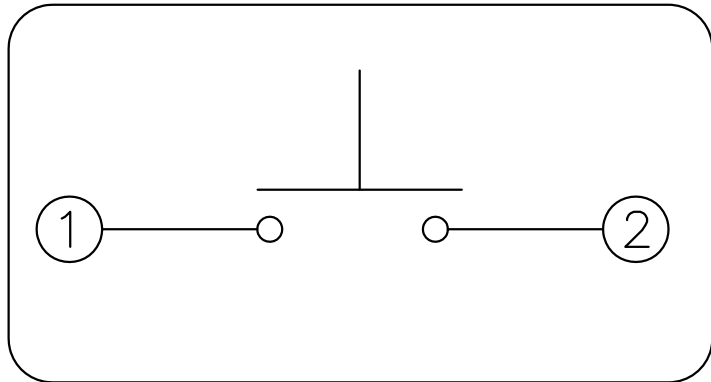


轴倾斜角度

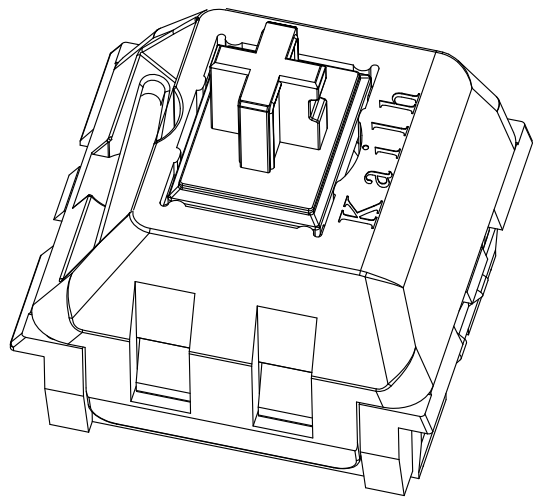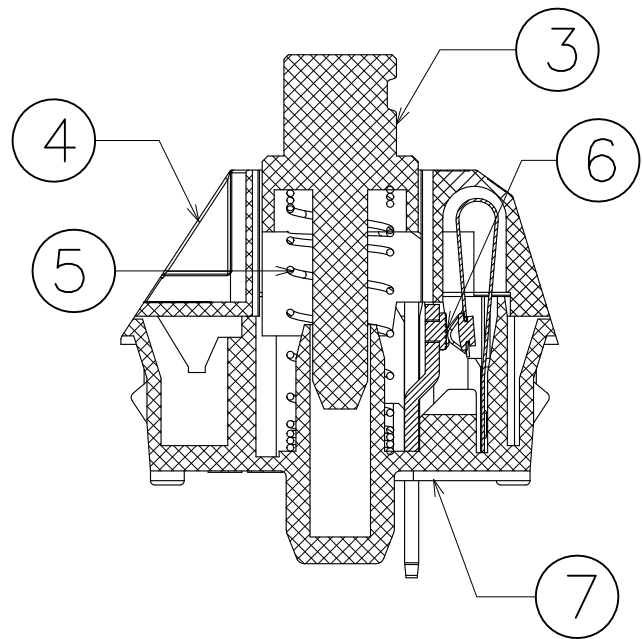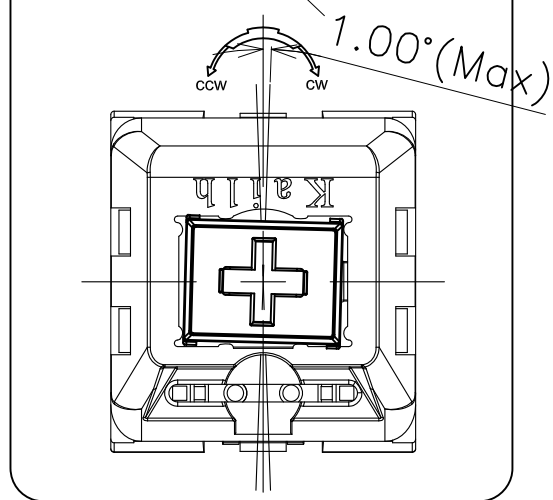

- Specification :**
- 1. Rating : 12V AC/DC max. 2V DC min. 10mA AC/DC max. 10μA DC min.
 - 2. Contact Resistance : 100mΩ Max
 - 3. Insulation Resistance : 100MΩ Min (DC500V)
 - 4. Withstand Voltage : AC100V (50-60Hz) for 1 minute
 - 5. Bounce Time : ≤5msec (at 16 in/sec. actuation speed)
 - 6. Operation Force : 50±10gf
 - 7. Pre travel : 2.0mm±0.6mm
 - 8. Total travel : 4.0±0.6mm
 - 9. Operating Life : 70,000,000 Cycles (min).
- <Feel is allowed to have difference before and after life test>

⑦	Base	—	1	PA66	Black	—
⑥	contact	—	2	Composite gold	—	—
⑤	Spring	—	1	Stainless Steel	—	—
④	Cover	—	1	Nylon	Black	—
③	Keystroke	—	1	POM	Red	—
②	static plate	—	1	Brass	Plating NI	—
①	movable plate	—	1	Copper Alloy	—	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		DONGGUAN CITY KAIHUA ELECTRONICS CO.,LTD				
DRAWN	Tangjia	2016.08.10		Kailh					
CHECKED				TITLE:		PG1511 Keystroke Switch(Red shaft)			
APPROVALS				PART NO.		CPG151101D93			
TOLERANCES ARE	30<L	±0.30	ANGLE	UNIT: mm		SCALE: 1:1		PROJ: 	
	10<L≤30	±0.20		DRAWING NO.		KHA-PG1511-045EN		SHEET 1 OF 1	
	5<L≤10	±0.15							
	L≤5	±0.10	±2°						

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			