


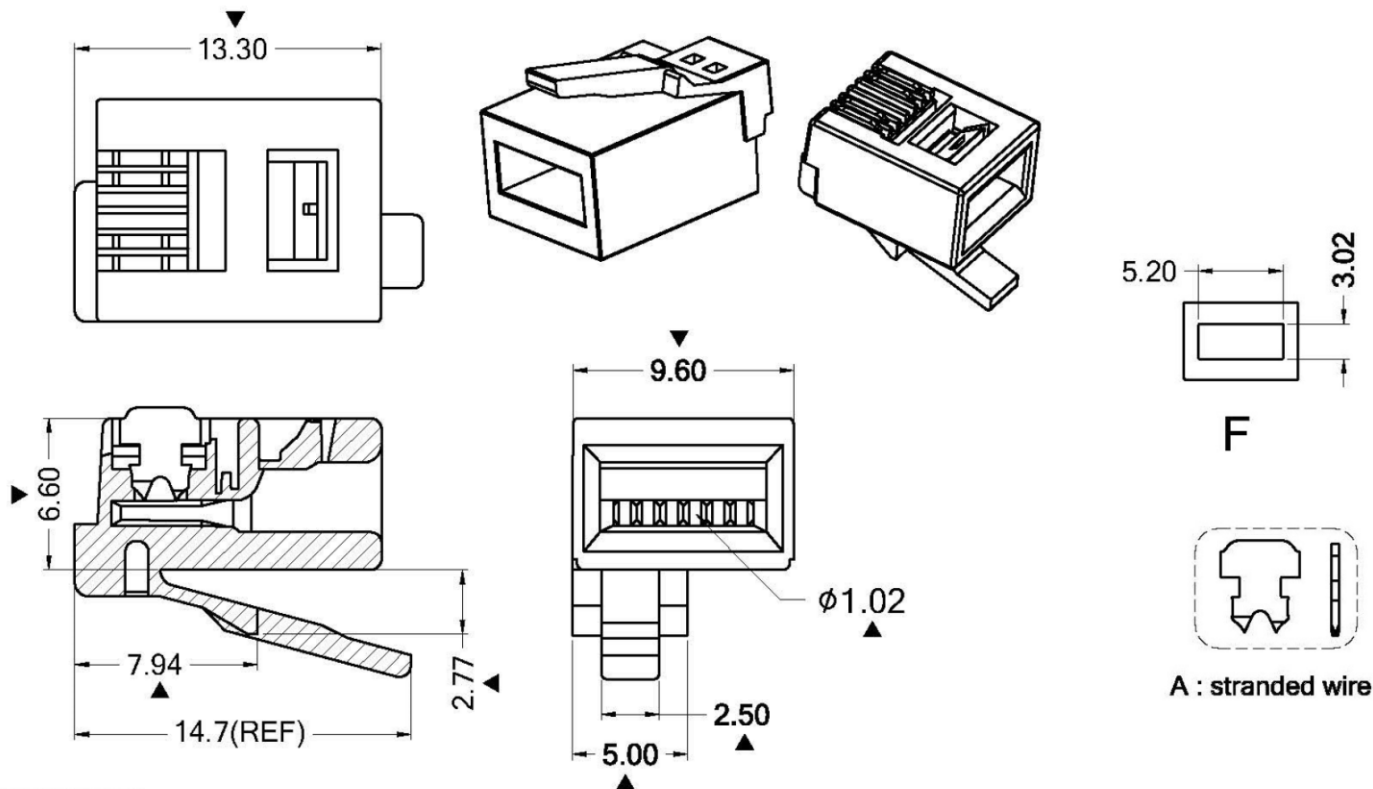

SPECIFICATION NOTES:

1. Electrical:

- 1.1 Voltage rating: 125 VAC RMS
- 1.2 Current rating: 1.5 A
- 1.3 Contact resistance: 50 milliohms max
- 1.4 Insulation resistance: 1000 megaohms min @ 500 VDC
- 1.5 Dielectric strength: 1000 VAC RMS 50Hz, 1MIN.

2. Mechanical:

- 2.1 Retention strength: 50N MIN FOR 60S±5S
- 2.2 Operating life: 750 CYCLES MIN
- 2.3 Insertion force: 30N MAX.

3. Material & finish:

- 3.1 Housing: PC clear
- 3.2 Contact: copper alloy plated with gold
- 3.3 Operating temperature: -40 °C to +80 °C.

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.20

UNIT / mm

SCALE 1 : 1

.XX ± 0.15


DATE

.XXX ± 0.05

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

MP-F-0606DR-LF
 SERIES | LEADFREE
 | D TYPE RIGHT
 | 6P6C
 | FLAT OUTLET

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com