


APPROVED BY:

Ver	Date	Modify Contents
V02	2013.05.20	修改FPC形状
V03	2019.12.11	增加日期编码


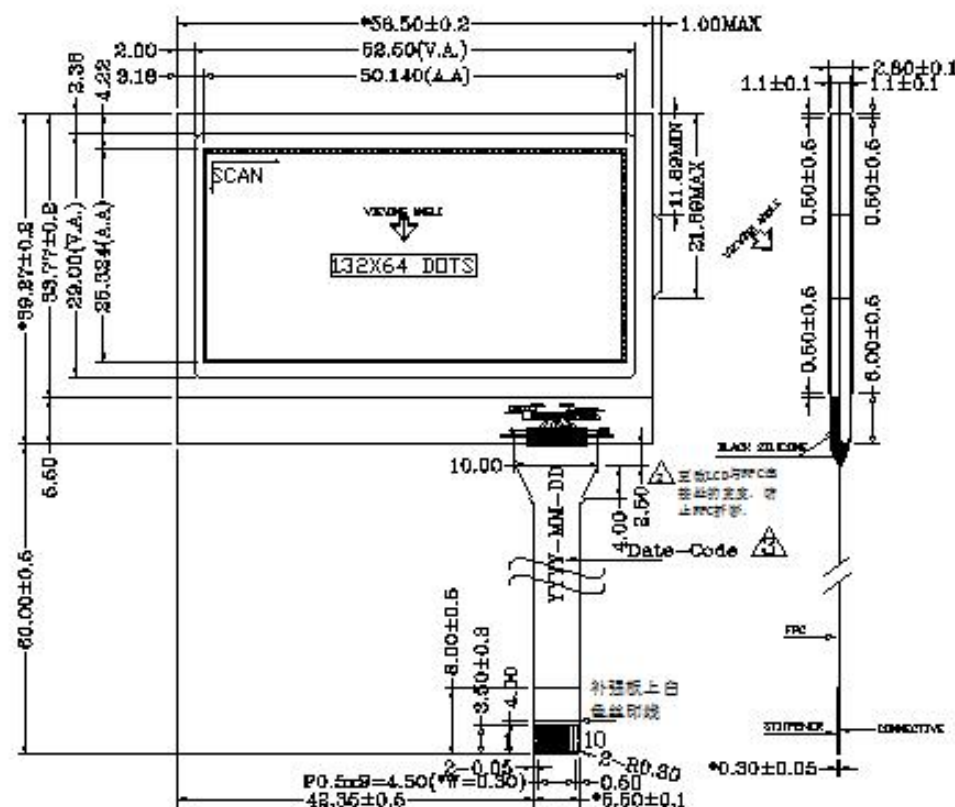


PIN	SYMBOL
1	VG
2	XV0
3	V0
4	VSS
5	VDD
6	SDA
7	SCL
8	A0
9	RESET
10	CS

NOTE:

1. GENERAL TOLERANCE: $\pm 0.2\text{mm}$
2. THE PART OF *ARE THE KEY DIMENSION TO CONTROL

LCD TYPE	FSTN	BACKLIGHT COLOR	—
POLARIZER TYPE	REFLECTIVE	FRAME TYPE	—
DISPLAY TYPE	POSITIVE	DATA TRANSFER	4-SPI
LCD COLOR	BLACK	CONNECTOR TYPE	FPC
VIEWING ANGLE	12:00	TECHNOLOGY	COG
OPERATING TEMP	-10°C ~ +60°C	DC-DC IC	—
STORAGE TEMP	-30°C ~ +70°C	LCD DUTY	1/65
BACKLIGHT TYPE	—	LCD BIAS	1/9
CONTROLLER IC	ST7567-G4D-1	ROHS	—
REMARKS	VDD=3.3V, V _{op} =9.0V(Type)		



FUJIAN GOLDEN VISION LCD SCIENCE & TECHNOLOGY CO., LTD.

福建金视界液晶显示科技有限公司

WWW.GOLDEN-VISION.CN

PRODUCT NO.	GV13204GFFN011-18045A(LCM)				
DRAWN BY	CQ 2019-12-11	SCALE	1:1	REV.	V03
CHECKED BY		PAGE	1/1		
APPROVED BY	Frank 2019-12-11	UNIT	mm		

发至: ☐ 开发部 ☐ 模块部 ☐ 品管部