





13XX-22XXXXX1
 L=B+C+A


1. 27mm Pin Header, Dual Row, Double Layer

SPECIFICATIONS


Current Rating: 1.00AMP
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 500V AC/Minute
 Operation Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T+30%GF

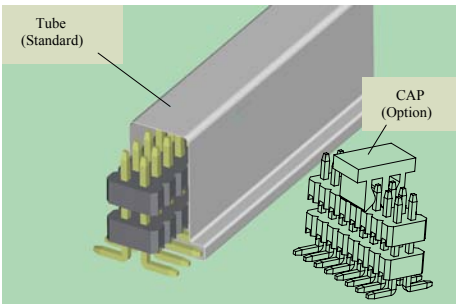


13XX-22XXXXR1
 L=B+2H+D1+D2+A+0.15



13XX-22XXXXM1
 L=B+C+D+F+A+0.15





13XX-22XXXXX2
 L=B+C+D+(W-J)/2+0.15




13XX-22XXXXMXXX1
 L=B+C+D+(W-J)/2+0.15

13XX-2 2 XX XX X XXX X X

- HEIGHT OF HOUSING: 08:0.85, 10:1.00, 15:1.50
- NO. OF PINS PER ROW: 02~50P
- CONTACT PLATING: G0:1u" Gold, G1:3u" Gold, G2:5u" Gold, G3:10u" Gold, G4:15u" Gold, G5:30u" Gold, G6:20u" Gold; S0:1u" Gold/Tin, S1:3u" Gold/Tin, S2:5u" Gold/Tin, S3:10u" Gold/Tin, S4:15u" Gold/Tin, S5:30u" Gold/Tin, S6:20u" Gold/Tin, SN: Tin
- CONTACT SHAPE: S: Straight, R: Right Angle, M: 180° SMT
- LENGTH OF TERMINAL
- PACKING: A: Tray, T: Tube, R: Tape & Reel, O: PE Bag

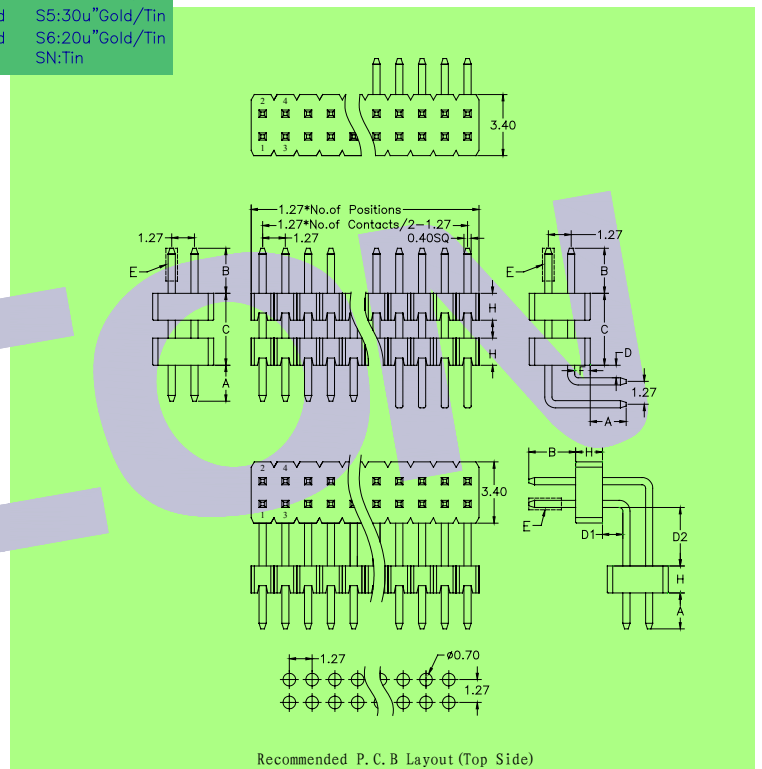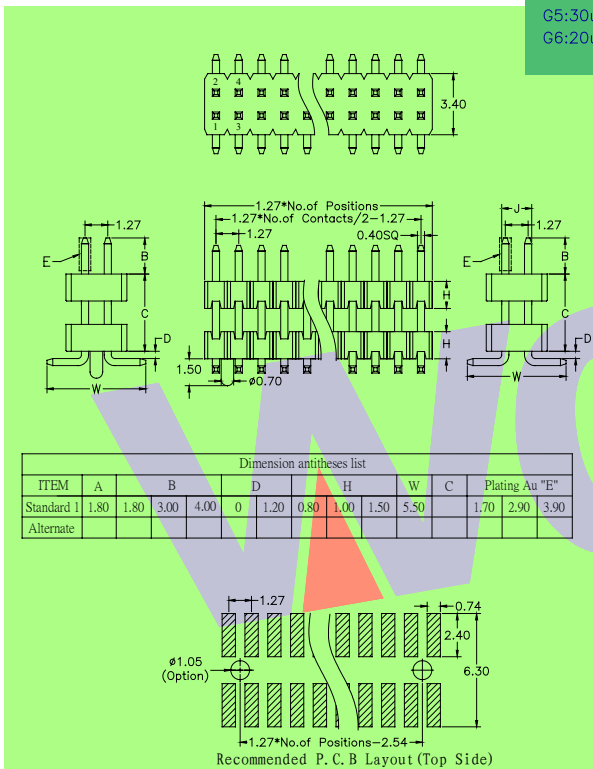



INNOVATION AND DEVELOPMENTCONTINUAL IMPROVEMENT***QUALITY FOREMOST***CUSTOMER SATISFACTION***

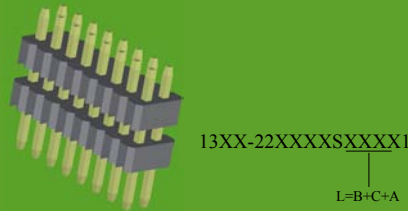

1. 2.7mm Pin Header, Dual Row, Double Layer


SPECIFICATIONS

Current Rating: 1.00AMP
 Contact Resistance: 20mΩ Max. FILE NO.E248993
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T+30%GF

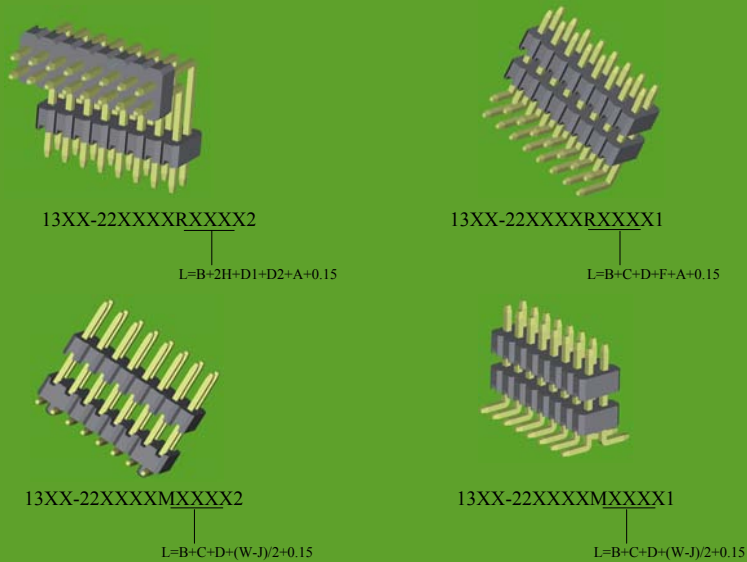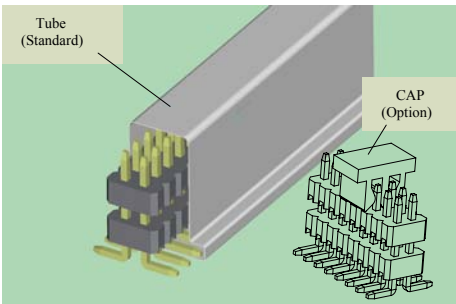

13XX-2 2 XX XX X XXX X X

- HEIGHT OF HOUSING**
16:1.60
20:2.00
25:2.54
- NO.OF PINS PER ROW**
02~50P
- CONTACT PLATING**
G0:1u" Gold S0:1u" Gold/Tin
G1:3u" Gold S1:3u" Gold/Tin
G2:5u" Gold S2:5u" Gold/Tin
G3:10u"Gold S3:10u"Gold/Tin
G4:15u"Gold S4:15u"Gold/Tin
G5:30u"Gold S5:30u"Gold/Tin
G6:20u"Gold S6:20u"Gold/Tin
SN:Tin
- CONTACT SHAPE**
S: Straight
R: Right Angle
M: 180°SMT
- LENGTH OF TERMINAL**
- PACKING**
A: Tray T: Tube
R: Tape & Reel
O: PE Bag

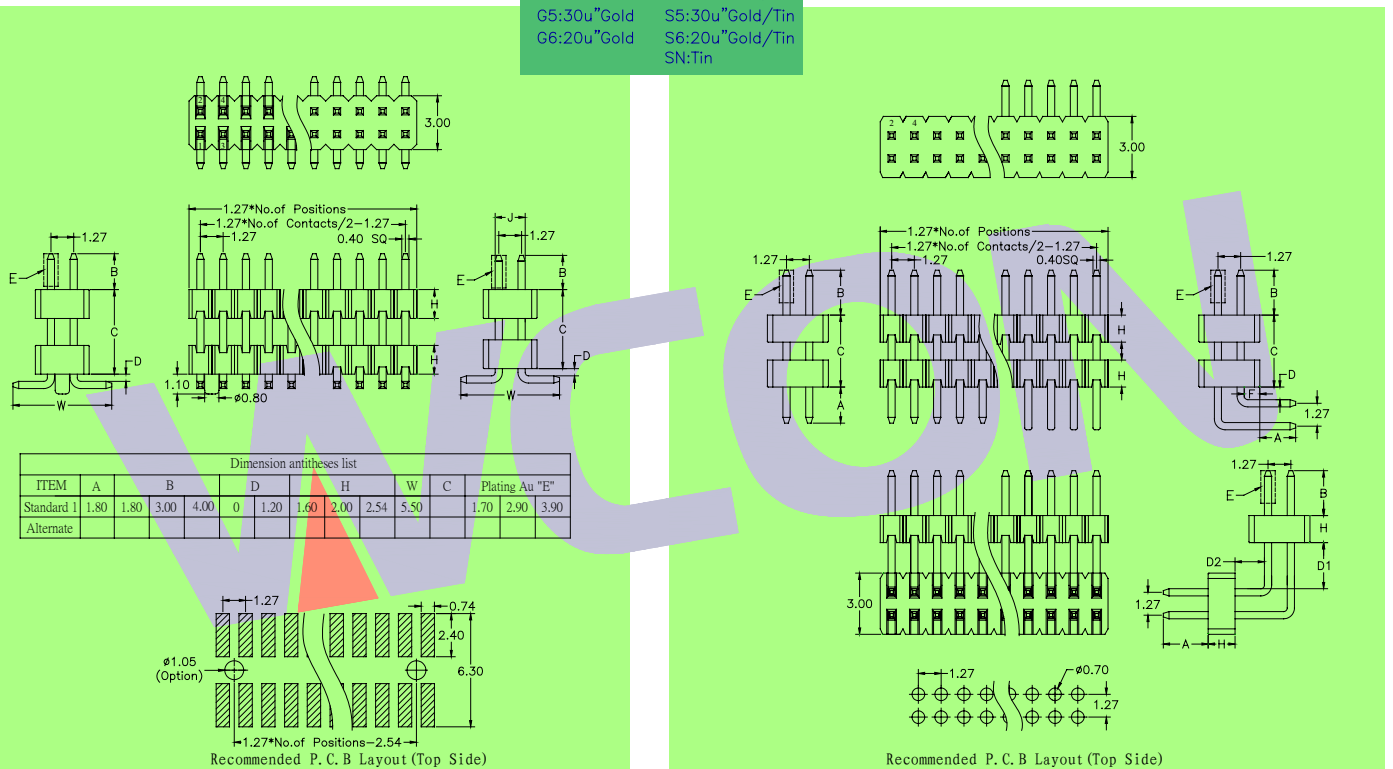

※INNOVATION AND DEVELOPMENT※CONTINUAL IMPROVEMENT※QUALITY FOREMOST※CUSTOMER SATISFACTION※