





4.8x0.5 Erkek konnektor term.
4.8x0.5 Mate quick connect terminals

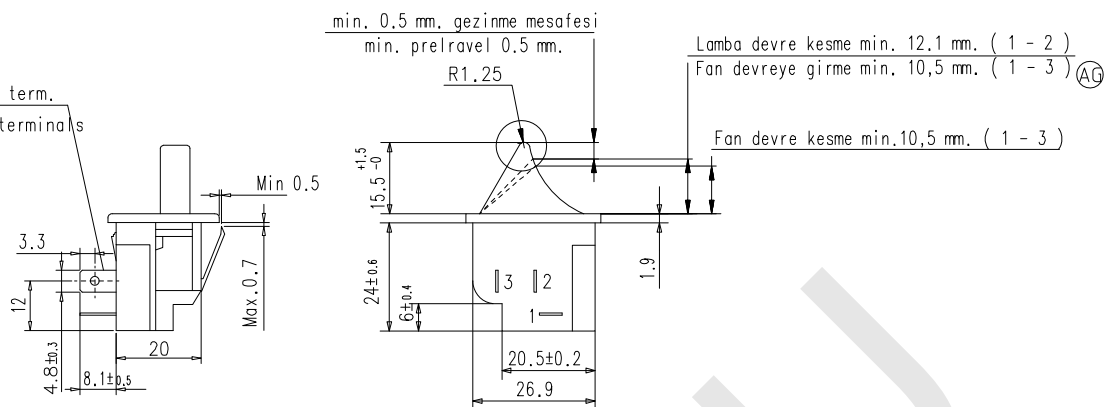

NOTE:
1.Rating:5A 125V AC 2.5A 250V AC
2.Contact resistance:50mΩ MAX
3.Operating force:350gf MAX
4.Life cycle:300,000 cycles

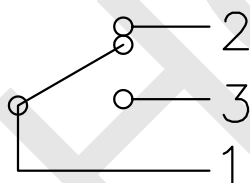

CIRCUIT

		MODEL	HDS3025-16T-SPDT				惠州市宏宇高科电子有限公司 Huizhou City HongYu High-Tech Electronics Co., Ltd.		
		DWG NO	TZ-DS3025-B-005						
△5				TOL. UNLESS OTHERWISE SPEC		SCALE	DRAW	CHKD	APPD
△4				BASIC DIMENSIONS	TOL.	/			
△3				<10	±0.3	UNIT			
△2				10~100	±0.5	mm			
△1				>100	±0.8	VERSION			
△	DATE	REVISION	DESIGN	ANGLE	±5°	AO	丘 2018.10.15 志敏	黄 2018.10.15 力文	卓 2018.10.15 红雨