



Category

SWITCH

- ANTI-VANDAL SW

- ROCKER SW

- PUSH SW

- TOGGLE SW

- MICRO/DETECTOR SW

- SLIDE SW

- ROTARY SW

- DIP SW

- TACT SW

- KEYLOCK SW

- CAPACITANCE SW

- SAFETY & CONTROL SW


- VEHICLE SW

- THERMOSTAT SW

- BATTERY SW

- TRIGGER SW

SOCKET

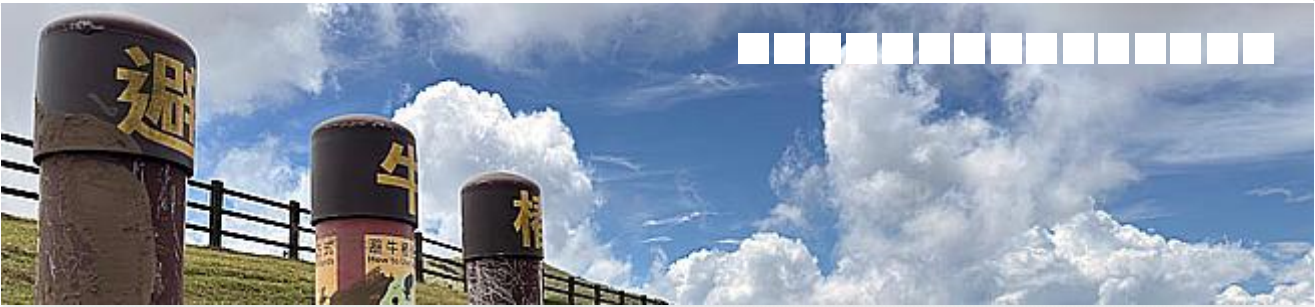

OUR PRODUCT

[Home](#) ▶ [Our Product](#) ▶ [PS5 Round Pushbutton Switch Extended Model](#) ▶ [PS5 Round Pushbutton Switch Extended Model](#)

SWITCH / PUSH SW

**PS5 Round Pushbutton Switch
Extended Model**
**UL-recognized Pushbutton Switches
with up to 16A and TV-6 Rating, meeting
IP68 Protection Level**

UL-recognized pushbutton Switches
Up to 16A and TV-6 Rating
IP68 panel waterproof
Metal and plastic thread options
M22, M25 bushing screw mounting
Exquisite round pushbutton design



ZOOM IN

[PDF Download](#) [Get Information](#)

[Print this page](#)

Feature

- INDICATOR
- SENSOR
- ELECTRO-MODULE
- BREAKER
- FUSE HOLDER
- FUSE
- ENCODER
- POTENTIOMETER
- CONNECTOR
- WIRE HARNESS
- BUZZER
- NEW PRODUCT



- 16A 125/250VAC (UL,CUL)
- 16(4)A 250V~ T125/55 (ENEC)
- 16(8)A 250V~ T125/55 (ENEC) optional
- TV-6 125V~ T55, 25E3 (cURus) optional
- 8[128]A 250V~T55 1E4 (cURus, ENEC15) optional
- Initial contact resistance: 20mΩ max.
- Insulation resistance: 100MΩ min, at 500VDC
- Dielectric strength: 1,000 VAC for 1 minute
- ON-OFF, or Momentary ON, DPST, SPST
- Ring & power symbol illuminated icon available
- LED illumination regardless of anode and cathode polarity
- Quick-connect, solder and pcb terminals
- M22 & M25 bushing, screw mounting
- Metal and plastic thread options
- IP68 panel waterproof
- Enhanced brightness, short body.

Specification


How to order

Products Search


Search



Panel cut-out

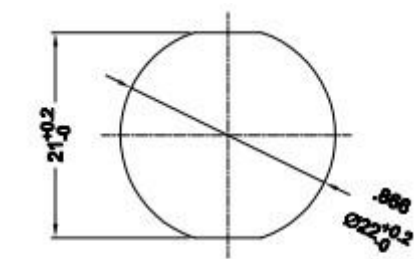


Panel Cutout Ø22 mm
(Panel thickness : 3.5 mm MAX)

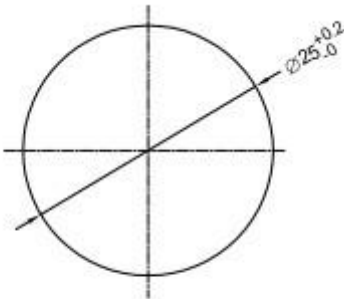






Panel Cutout Ø25 mm
(Panel thickness : 7 mm MAX)



Item

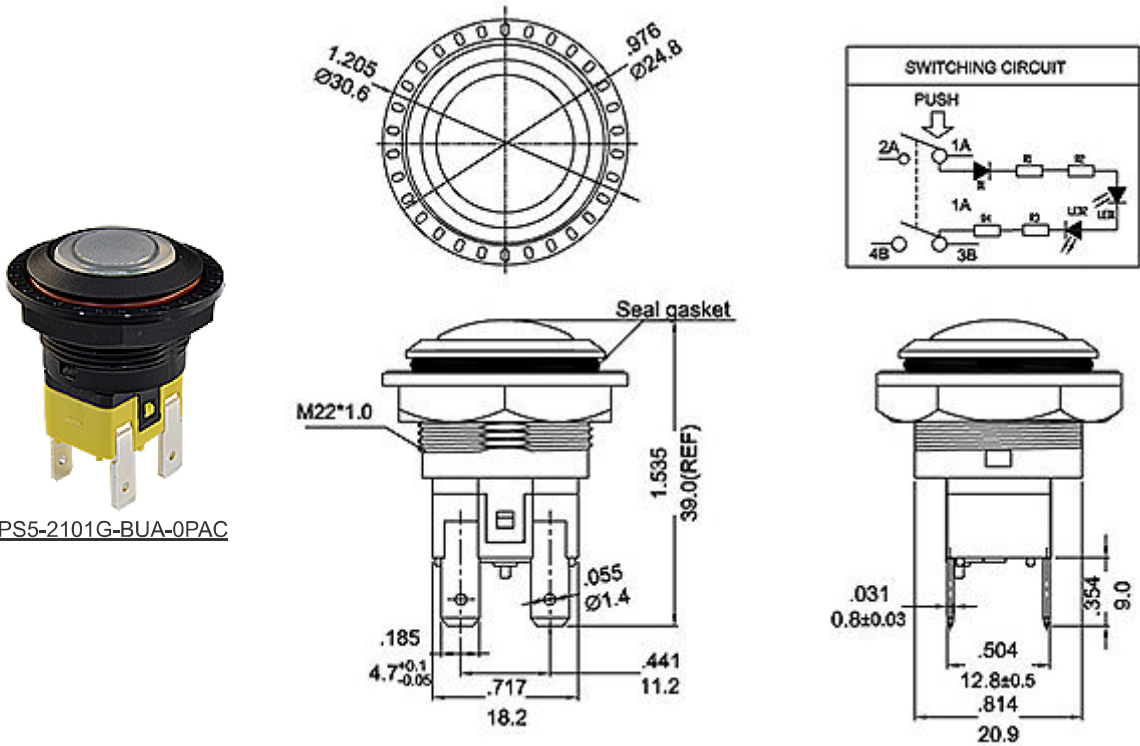

PS5-2101G-BUA-0PAC

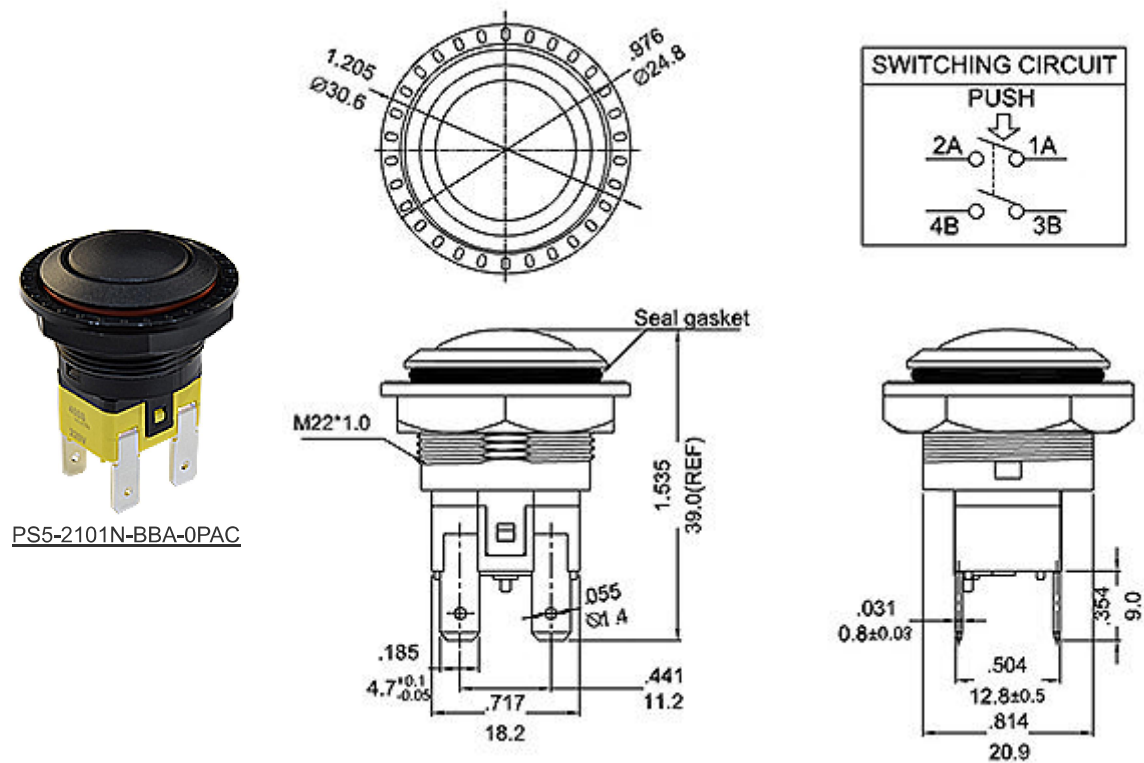

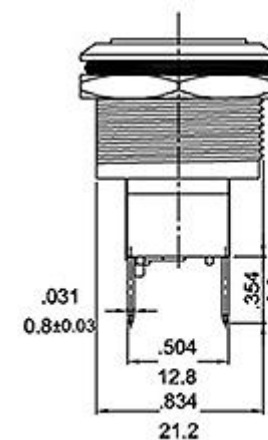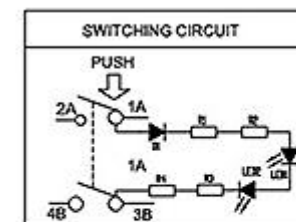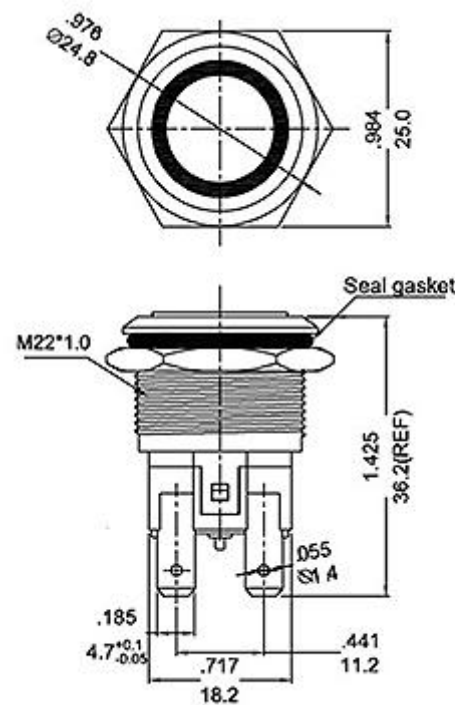

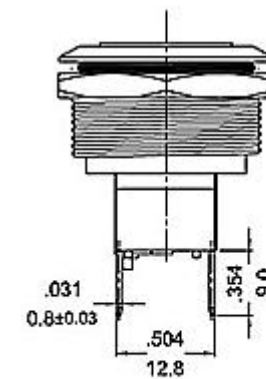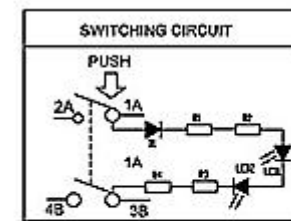

Tel: +886-2-29161263 Fax: +886-2-29117574 canal@c-components.com.tw

©2009 Canal Components Inc. All Rights Reserved