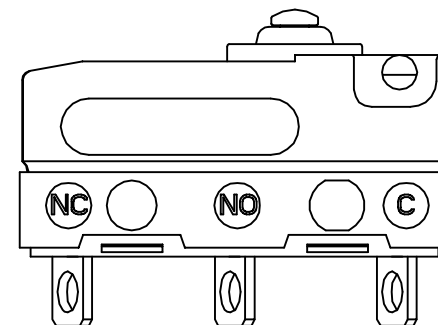
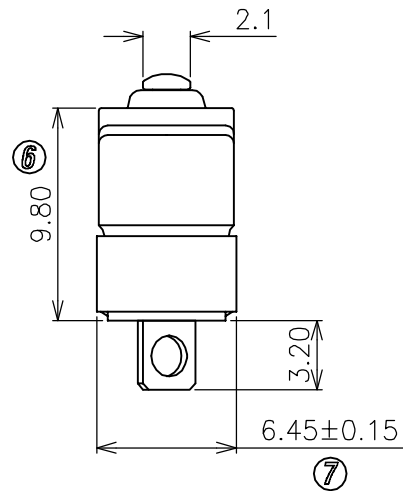


CIRCUIT OF SWITCH

- 1.RATING: 5A125/250VAC.
- 2.OPERATING FORCE: 340gf(max)
- 3.CONTACT RESISTANCE: <50mΩ
- 4.INSULATION RESISTANCE: >100MΩ(500VDC BETWEEN OPEN CONTACTS)
- 5.DIELECTRIC STRENGTH: >1500Vac 0.5mA 1 MINUTE
- 6.COLOR: BLACK
- 7.Degree of protection:IP67
- 8.COMPLY WITH THE REQUIREMENTS OF THE EU DIRECTION 2002/GS/EC ROHS AND SUBSEQUENT AMENDMENTS.
- 9.UL FILE NO.: E300970.

⑤	→			DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN LMC 2017.01.03	ALL SIZE ARE IN	MM				
④	→			RANGE	TOLERANCE					SCALE	FIT				
③	→			X	±0.4					MAT'L	***				
②	→			X.X	±0.3					MATERIAL NO.				DRAWING NO.	REV
①	→			X.XX	±0.2										
NO	DESCRIPTION	APPROVED	DATE	ANGLES	±0.5'	ROCK TEK ELECTRICAL(SHENZHEN) CO.,LTD.				RTM2-0F4S05A340	*****	A			