

60X60X28


DC Blower F



● General Specifications (一般規)


- Material:
Frame And Impeller: Thermal Plastic
- Lead Wires: UL Type
RED Wire Positive (+)
Black Wire Negative (-)
- Insulation Resistance: 10MΩ Or Over
DC250V Megge
- Dielectric Withstand Voltage: AC500V
- Allowable Ambient Temperature Range:
-10°C ~ +70°C (Operating)
-40°C ~ +70°C (Storage)

● Dimensions Drawing (外观图)

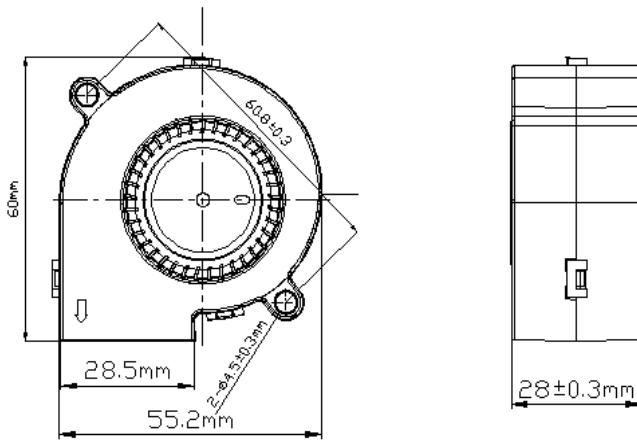

Unit:mm

● Characteristic Curves (特性曲)

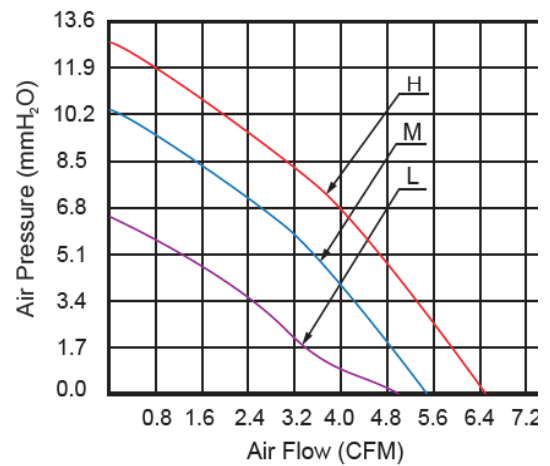

● Specifications (规格)

(型号) Model	(轴承类型) Bearing Type	(电压) Rated Voltage	(电压范围) Operation Voltage	(电流) Current	(转速) Speed	(风量) Air Flow	(风压) Static Pressure	(噪音) Noise Level
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA
SDL6028S	Sleeve	5	4.5~5.5	0.08	3000	4.90	6.00	30.70
SDM6028S				0.24	4000	5.30	10.30	35.80
SDH6028S				0.48	5000	6.50	12.40	39.50
SDL6028B	Ball			0.08	3000	4.90	6.00	30.70
SDM6028B				0.24	4000	5.30	10.30	35.80
SDH6028B				0.48	5000	6.50	12.40	39.50
SDL6028S	Sleeve	12	10.8~13.2	0.11	3000	6.50	10.90	31.00
SDM6028S				0.15	4000	8.10	16.00	41.00
SDH6028S				0.26	5000	10.00	26.30	49.30