

深圳市海致洋科技有限公司
Shenzhen Haizhiyang Technology Co., Ltd

Product Specification
产品规格书

产 品 型 号 Product Model Number	Y30-ANC	
产 品 名 称 Product Name	无线蓝牙耳机 Wireless Bluetooth Earphone	
封 样 版 本 Sealed version	A/01	
制 定 日 期 Compile date	2024-11-29	
制 作 Compile	审 核 Audit	核 准 Approved
刘军 Liu Jun		

版本修改记录
Version modification record

版本 Version	修改内容 Modify content	时间 Date
V.0	初版 First edition	2024/11/29

目录/Content

- ID/配色图
- Feature/技术规格
- PCBA Design Section/PCBA 设计部分
- Operation/操作说明
- Reliability test standard/可靠性测试标准

1. ID/配色图



技 术 规 格

Technical specification

2. Feature/电性参数

蓝牙版本 Bluetooth Version	BT 5.4
蓝牙协议 Supported Bluetooth Profile	a2dp\avctp\avdtp\avrcp\hfp\spp\smP\att\gap gatt\rfcomm\sdp\l2cap profile a2dp 1.3\avctp 1.4\avdtp 1.3\ avrcp 1.5\hfp 1.5 \spp 1.0\rfcomm 1.2\pnp 1.3\ hid 1.0\sdp core4.2\l2cap core 4.2
蓝牙芯片 Bluetooth chip	JL7003D8 (with ovp)
佩戴方式 Way of wearing	入耳式 1pair earbuds(in ear)
功能用途 Functional use	ANC+ENC 蓝牙聆听 ANC+ENC Bluetooth listening
传输距离 Bluetooth Range	≥10M
喇叭直径 Horn diameter	Φ 13mm*3.0mm Φ 13mm * 3.0mm
喇叭频响范围 Horn frequency response range	20Hz - 20KHz
降噪功能 Noise reduction function	支持-35dB 降噪深度 Noise reduction 35dB
产品阻抗	32 Ω ±15%

深圳市海致洋科技有限公司
Shenzhen Haizhiyang Technology Co., Ltd

Product impedance	
喇叭灵敏度 Horn sensitivity	117dB ± 3dB
额定功率 Speaker Power	10mW
麦克风 microphone	SM2718T381FN4-ANC
麦克风频响范围 Microphone Frequency Response	10Hz - 10kHz
麦风灵敏度 Microphone Sensitivity	-38±1dB
载波频率 Carrier frequency	2.402GHz-2.480GHz
外壳材料 Housing material	ABS+PC
耳机电池类型 Battery Type	聚合物电池 501012-40mAh Polymer Battery 501012-40mAh
充电仓电池类型 Charging case battery capacity	聚合物电池 101430-400mAh Polymer Battery 101430-400mAh
耳机充电时间 Charging Time	1 小时左右 About 1 hours
充电仓充电时间 Charging time of the charging case	1.5 小时左右 About 1.5 hours
音乐播放时间 Music Playing Time	7.5 小时左右 About 7.5 hours
音乐播放电流 Music Playing Current	<u>5.8-6.5mA</u>
通话播放电流 Call Playing Current	<u>8.3-9.2mA</u>
待机电流 Standby current	<u>0.3-2.6 mA</u>
关机电流 Shutdown current	15uA
耳机充电电流 Earphone charging current	40mA
耳机尺寸(长, 宽, 高) Earphone size (length, width, height)	31*20*26mm

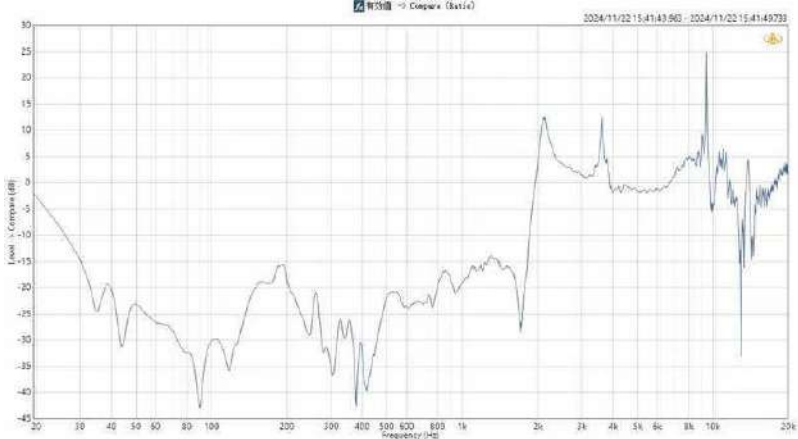
充电仓尺寸（长，宽，高） Charging case size (length, width, height)	60*46*25mm
耳机重量 Earphone weight	4.3g
产品重量 Product weight	42.37g
可选配件 Optional accessories	数据线：一端 USB 接口；一端 Type-c 接口 Data cable: One end USB interface; Type-C interface at one L=0.5M±20mm (USB 头至尾端)Type-C 公头 L = 0.5M ± 20mm (USB head to tail) Type-C male
包装清单 Packing list	/
工作温度 Operating temperature	-20℃到 60℃ -20℃-60℃
存储温度 Storage temperature	-20℃到 60℃ -20℃-60℃

3. PCBA Design Section/PCBA 设计部分

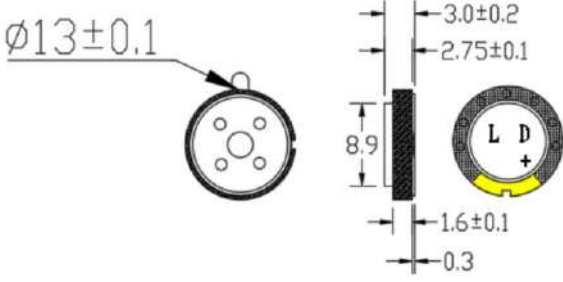
耳机充电仓/Earphone charging case	
PCB 贴片线稿图 PCB Line Drawing	PCB 贴片线稿图 PCB Line Drawing

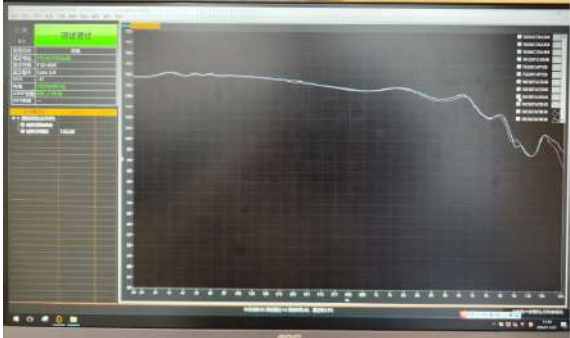
整机降噪曲线深度

Depth of overall noise reduction curve

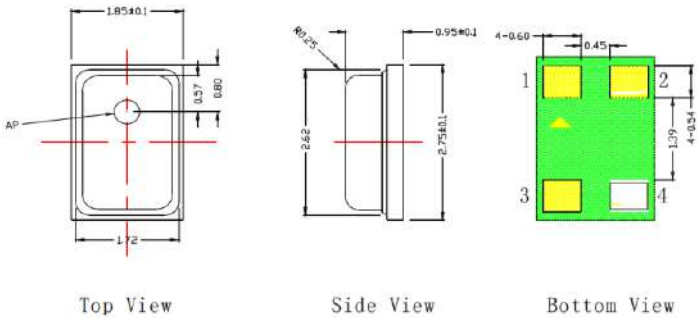
1.1	型号 Model	Y30-ANC
1.9	降噪深度曲线 Noise reduction depth curve	

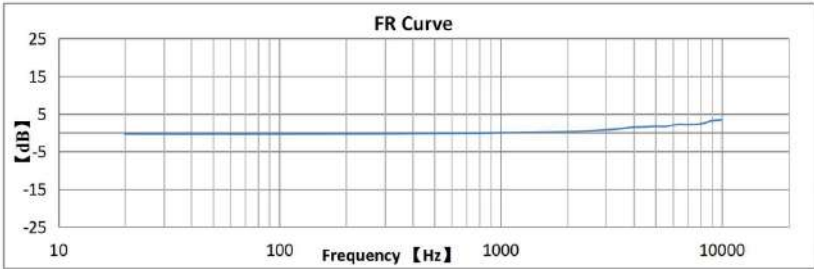
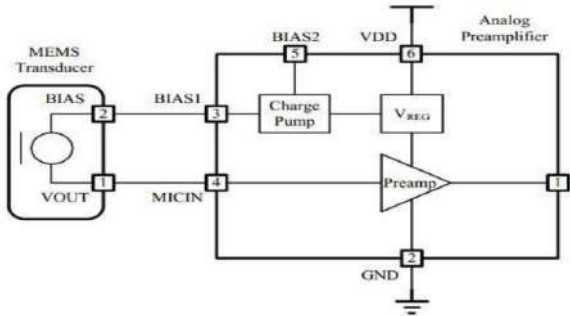
喇叭 Speaker

1.1	型号 Model	LD 13-6-17
1.2	阻抗 Impedance	32 Ω ±15%
1.3	额定输入功率 Rated input power	10mW
1.4	最大输入功率 Maximum input power	20mW
1.5	灵敏度 Sensitivity	117dB ± 3dB
1.6	频率范围 Frequency range	20Hz ~ 20KHz
1.7	失真率 Distortion Rate	1% 95db SPL at 1KHZ
1..8	尺寸 Dimension	

1.9	频率响应曲线 Frequency Response Curve	
-----	------------------------------------	--


麦克风 MIC.

2.1	型号 Model	SM2718T381FN4-ANC
2.2	灵敏度 Sensitivity	-38±1dB
2.3	阻抗 Impedance	450Ω
3.4	消耗电流 Consumption current	≤120μA
2.5	频率范围 Frequency range	10Hz ~10KHz
2.6	指向性 Directivity	全方位 all around
2.7	信噪比 S/N Signal to noise ratio	60dB
2.8	尺寸 Dimension	

2.9	频率响应曲线图 Frequency Response	
2.10	测试电路图 Measurement Circuit	

电池部分 Part of the battery

电池 Battery			
生产厂家 Manufacturer	锂锐电子 LiRui Electronics Lithium Battery	标准电压 Standard voltage	3.7V-4.2V
电池类型 Battery type	聚合物电池 Polymer battery	循环寿命次数 (循环后容量≥80%) Number of cycle life (Volume ≥ 80% after cycle)	不小于 300 次 No less than 300times
寿命循环测试容量 Life cycle test capacity	Charge: 0.2C Charge to 4.2V Discharge: 0.2C Discharge to 3.0V	充电截止电压 Charge cut-off voltage	4.20±0.03V
电池容量 Battery capacity	40mAh/3.7v 400mAh/3.7v	过放保护电压 Over discharge protection voltage	3.0V

附电池规格书/Battery Specification:	
电池实物图（正面） Battery physical map (front)	电池实物图（反面） Battery physical map (reverse)
	
电池实物图（正面） Battery physical map (front)	电池实物图（反面） Battery physical map (reverse)
	

4. Operation/功能操作/使用说明

序号 no.	功能 function	操作描述 Operation description	指示灯 Indicator light	语音包 Voice packet
耳机 Earphone				
1	开机 power on	耳机取出充电仓，耳机自动开机 Take the earphone out of the charging case, and the earphone will automatically power on.		power on
2	手动开机 Manual	耳机不在充电仓内，关机状态下长按 MFB 键 3S 开机 The earphone are not in the charging case, Press and hold the MFB button		power on

深圳市海致洋科技有限公司
Shenzhen Haizhiyang Technology Co., Ltd

	power on	for 3 seconds to turn on the device while it is turned off		
3	关机 power off	耳机放入充电仓，关仓后，耳机进入充电状态 Put the earphone into the charging case. After closing the case, the earphone enters the charging state.		power off
4	手动关机 Manual power off	开机状态长按 MFB 键 5S，耳机关机 Press and hold the MFB button for 5 seconds in the power on state to turn off the headphones		power off
5	超时关机 shutdown timeout	开机状态下，TWS 与设备连接不成功，5 分钟自动关机 The connection between the TWS and the device is not successful, 5 minutes self-shutdown		power off
6	配对模式 Pairing mode	耳机取出充电仓，自动进入配对模式，配对成功，然后打开手机上的蓝牙设备搜索。 Take out the charging case of the earphones, automatically enter pairing mode, pair successfully, and then open the Bluetooth device search on the phone.		pairing
7	TWS 与设备连接 TWS connection to equipment	设备打开蓝牙功能，搜索配对名为“Y30-ANC”的蓝牙设备，并点击连接，直至手机显示与耳机连接成功 Turn on the Bluetooth function, search for a paired Bluetooth device named "Y30-ANC," and click Connect until the phone shows that it has successfully connected to the earphone		Connected
		在有配对记录的时候开机，回连手机，回连不上进入配对模式 When there is a pairing record, turn on the phone, reconnect the phone, and if unable to connect, enter pairing mode	/	
8	TWS 与设备断开 TWS is disconnected from	设备与 TWS 断开，TWS 自动进入搜索配对模式 The device is disconnected from the TWS and the TWS automatically enters search pairing mode		disconnected

深圳市海致洋科技有限公司
Shenzhen Haizhiyang Technology Co., Ltd

	the device			
9	回连模式 Backlink mode	开机配对后，自动进入回连最后配对的设备，回连不上或没设备连接 5 分钟自动关机 After boot pairing, automatically enter back to connect the last paired device, can't back to connect or no device connection 5 minutes automatically shut down		connected
10	超距回连 Over distance connection	连接状态下，超距后 5 分钟内可自动回连。如仍未回连，自动关机 In the connected state, it can automatically reconnect within 5 minutes after exceeding the distance. If not reconnected, automatically shut down	/	power off
11	接听/挂断电话 Answer / hang up	来电时双击左耳或者右耳 Double click on the left or right ear when making a phone call	/	
12	拒接电话 Refuse to answer	来电时长按左耳或者右耳 1.5S Long press left or right ear for 1.5S when calling	/	滴 di
13	播放/暂停 Play / Pause	双击左耳或者右耳 Double click on the left or right ear	/	机械音 Mechanical sound
14	音量加 Increase the volume	单击右边 Click on the right	/	机械音 Mechanical sound
15	音量减 Reduce the volume	单击左边 Click on the left	/	机械音 Mechanical sound
16	上一曲 Previous song	三击左耳 Three clicks to the left ear	/	机械音 Mechanical sound
17	下一曲 Next song	三击右耳 Three clicks to the right ear	/	机械音 Mechanical sound

深圳市海致洋科技有限公司

Shenzhen Haizhiyang Technology Co., Ltd

18	降噪模式切换 Noise Reduction Mode Switch	长按左耳 3S（模式切换顺序：降噪开启-通透模式-普通模式） Long press left ear 3S (Mode switching sequence: ANC On - Transparency Mode - ANC Off)		语音播报 voice announcement
19	语音助手（如 SIRI） Voice assistants (like Sri)	长按右耳 3S，唤醒 SiRi Long press right ear for 3 S to wake up Siri	/	滴 di
20	低电量提醒 Low battery alert	开机状态中，电池电压低于 3.3V Battery voltage is less than 3.3V in power state		电池电量不足 Low power
21	低电关机 Low power shutdown	开机状态中，电池电压低于 3.2V Battery voltage less than 3.2V in power state	.	滴 di
22	耳机充电 Earphone charging	放入充电仓中，左右耳机充电分别单个触发控制，In the charging case, the left and right earphones are separately triggered and controlled.		
23	来电铃声 Incoming Call Ringtone	苹果/安卓：同手机铃声 Apple / Android: Same ringtone	/	嘟嘟嘟 Toot toot toot
24	默认音量 Default volume	耳机开机音量默认 50% Headset Boot Volume Default 50%	/	
25	电量展示 Electricity display	连接设备上面需显示 TWS 当前电量 The current TWS charge must be displayed on the connected device	/	

深圳市海致洋科技有限公司

Shenzhen Haizhiyang Technology Co., Ltd

	city display			
26	AAC	支持 AAC, SBC 音频解码 Support for AAC, SBC audio decoding		
充电仓 Charging case				
序号 no.	功能 function	操作描述 Operation description	指示灯 Indicator light	
1	充电仓对耳机充电 Charging case charges the headset	充电仓关仓后，数码管的数字常亮，数码管跑充电马灯亮起，两只耳机满电后数字和跑码都熄灭。 After the charging bin is closed, the digits of the digital tube are always on, the digital tube running charging horse light is on, and the digits and running code are off when both earphones are fully charged.		
2	低电量提醒 Low Battery Alert	数码管的个位开始闪烁提示 The digit of the digital tube starts blinking to indicate		
3	充电仓充电 Charging Case Charging	数字常亮显示当前电量，数字末位闪烁 The digits are always on to show the current power level, and the end of the digits are blinking		
4	充电仓充满电 Charging case fully charged	满电后显示 100 常亮，数字常亮 Display 100 is always on when fully charged, digits are always on		
5	充电仓开盖 Charging case opening cover	数码管的数字亮 6 秒后熄灭 The digits of the digital tube light up for 6 seconds and then go out.		
6	一键复位 One-tap Reset	打开充电仓，耳机在充电仓内，长按按键 3S，数码管闪烁 2 下，恢复出厂设置成功。 Open the charging case, the earphone is in the charging case, long press the button 3S, the digital tube blinks 2 times, restore the factory settings successfully.		

5. 可靠性测试标准 Reliability Test Standards

试验项目 Test item	子类别 Sub-Category	标准 standard
Temperature test 温度测试	Storage with package - Damp Heat (高温储存试验)	High temperature storage test: test temperature: 70℃, test time: 48 hours 高温贮存试验 测试温度 70℃，测试时间 48 小时
	Storage with package - Cold (低温储存试验)	Low temperature storage test temperature - 20℃, test time 48 hours 低温贮存试验 测试温度 -20℃，测试时间 48 小时
	Thermal shock (part of Accelerated life tests (高低温循环测试)	Low temperature: - 20 ℃ for 1 h/high temperature HT: 60 ℃ for 1 h; Cycles: 24 times, a total of 48 hours; 低温试验: -20° C1 小时/高温试验: 60° C 保温 1 小时; 周期: 24 次, 共 48 小时;
Transportation Tests 运输测试	Random Vibration test (震动试验)	频率 5~55Hz, 振幅:5mm, 扫频方式, 30min. 5 ~ 55 hz frequency, amplitude, 5 mm, frequency sweeping method, 30 min.
	Package Drop test (包装跌落试验)	Faces:6 Edge:3 Corner:1 Per National Spec (按照国标)
	Free Drop test (Bare product) (裸机跌落试验裸机自然状态下)	1) 1.2m 2) 3 times on concrete or 6 times on the wooden board(水泥地面: 3 次; 或者木质地板: 6 次)
Reliability Test 可靠性试验	switch life tests (开关寿命测试)	Press force=160±30g, Travel=0.15-0.22, Life=50000 次 /在 160±30 的力度下以 100 次/分的速度, 对按键进行开关闭动作, 至少 10000, 功能正常。
	Durability 插拔寿命	Speed=3cycles/min, total cycle=3000, no deformation. 3000 次插拔, 插拔速度 3 次/分钟, 外观无变形
	Headband Pull Test (抽拉测试)	1. 插拔测试机, 30 次/分钟, 500G 的力抽拉 3000 次, (抽拉正常, 功能无损坏) /Speed=30cycles/min, total cycle=3000, 500g,
	Headband Expansion (头带扩张测试)	1. 头带扩张测试机。2., 30 次/分, 扩张 3000 次无变形, 产品功能正常。 Speed=30cycles/min, total cycle=3000, No crack.
	Twist test (头带扭转测试)	Speed =30cycles /min and the rotation degree to 45° , total test cycles=3,000, no crack. 1. 头带扭矩 45 度不断裂, 扭转 3000 次, 功能正常, 30 次/分。

深圳市海致洋科技有限公司
Shenzhen Haizhiyang Technology Co., Ltd

Salt spray test (corrosion) (盐雾试验)	5% NaCl, 35°C 24Hr in a tester → wash → Remove water → 4Hrs, room temperature NaCl 5%, 35°C, 在测试仪中 24 小时-洗涤-去水- 4 小时, 室温 35°C
Perspiration resistance test (PU/ cloth/ coated surface, metal/ plated/ laser logo) 耐汗性测试	Dried surface, Artificial perspiration: approx. pH 4.0 and pH 5.0 Wrap the Double layers gauzes containing Artificial perspiration around the specimen Leave the specimen in the chamber at a temperature $65 \pm 2^{\circ}\text{C}$, humidity of 90 to 95 %, for 48 hours. Take the specimen out of the chamber, leave it under a room temperature for 2 hours, and clean the surface by washing in running tap water. CRITERIA: No significant discoloration, Cracks, blistering and deformation (material degradation), Stickiness of external surfaces, Haze of transparent plastic. 外表干净, 干燥的样品, 人工汗水成份/升: 1 升 蒸馏水, 加 8 克磷酸二氢钠二水合物 ($\text{NaH}_2\text{PO}_4 \cdot 2\text{H}_2\text{O}$), 8 克氯化钠 (NaCl), 5 克醋 酸混合成 pH 值为 4.5 左右的溶液, 用双层蘸满汗 液的纱布敷在样品表面, 将样品放入温湿度为 $65 \pm 2^{\circ}\text{C}$、90 to 95 %, 48 后取出, 恢复常 2 小 时, 用自来水冲洗干净, 白色纱布上无褪色, 染色 现象
Alcohol Test on coated surface /酒精测试(喷 油、丝印件)	1. 95% 医用酒精. 2. 500G, 30 次。3. 两层棉布在表面 外理件上来回算一次循环, 擦拭 30 次无露底, 掉 漆现象。95% medical alcohol. 2500G, 30 times. 3. Apply two layers of cotton cloth on the surface of the external treatment part for one cycle, wipe 30 times without exposing the bottom or peeling paint
Abrasion test on coated surface /磨损试 验(喷油、丝印件)	Loading: 250 g; Cycles: 50 times, HB pencil (250 克的力 50 次, HB 铅笔)
grid cut test on coated surface 百格测试 (喷油、丝印件)	1, Dried surface, 6x6 cut-lattice by cross- cutter, 1mmx1mm cutting spacing, on a surface as flat as possible of the test object (If the specimen is very small and there is not enough space to cut the surface in lattice patterns, cut it in a cross), clear surface by hairbrush.

		2, 3M tape(Scotch 610#) 3 times/point, only one peel for each tape, Apply a piece of tape over the cuts. The tape must be carefully applied to the test surface in order to avoid bubbles between the tape and the surface, the tape should be stay on the surface 60sec, remove the tape quickly pulling in 45 degree angle. 干燥的表面，用专用百格刀在产品平面划出 6 行 6 列 1mmx1mm 的小方格，如果产品面小不足又划方格，可划一个交叉十字，用毛刷清洁测试面，用 3M SCOTCH610#胶带贴在格子表面赶出气泡并保持 1 分钟，每个点以 45 度角快速拉起 3 次，胶带经一次拉起后不能再用。经测试后的样品方格内不脱层。
--	--	--

6 . 温馨提示 Warm prompt

- 1) 耳机充电过程中，耳机处于关机状态，会断开与手机的连接，电源适配器必须选用 5V±0.2V
- During the earphone charging process, the earphone is in a shutdown state, which will disconnect from the mobile phone, and the power source adapter must be selected 5V ± 0.2V
- 2) 耳机开机后，如果手机未搜索到耳机，可以先关闭手机蓝牙再重新打开手机蓝牙，手机会重新索
- After the earphone is turned on, if the phone does not search for the earphone, you can turn off the Bluetooth of the phone first and then turn on the Bluetooth of the phone again.

7 . 运输要求 Transport requirements

产品在半荷电（50%-90%电量状态）包装成箱经行运输，在运输过程中应防止剧烈振动，冲击或挤压，防止日晒雨淋，可适用于汽车、火车、轮船、飞机等普通交通工具运输。

The product should be packed into boxes with half charge (50% -90% charge state) for transportation. During transportation, it should be protected from severe vibration, shock or extrusion, sun and rain. It can be applied to cars, trains, ships, planes and other ordinary transport vehicles.

8. 产品使用时警告事项及注意事项

Warnings and precautions when using the product

深圳市海致洋科技有限公司
Shenzhen Haizhiyang Technology Co., Ltd

- 切勿使用具有腐蚀性的清洁剂清洁本产品。
Do not use aggressive cleaning agents to clean this product.
- 切勿让本产品加热或靠近火源。
Do not allow this product to be heated or near a source of fire.
- 切勿让本产品长时间受阳光直接照射。
Do not expose this product to direct sunlight for prolonged periods.
- 切勿将本产品弃置于火中，避免发生爆炸。
Do not throw this product into a fire to avoid explosion.
- 切勿尝试拆出本产品做任何修改。
Do not attempt to disassemble the product to make any modifications.
- 如长时间不使用本产品，请将它储存于干燥的环境中，并每月至少为耳机充电一次以延长寿命，避免极端的温度和灰尘。
If you do not use this product for a long time, please store it in a dry environment and charge the headset at least once a month to extend its life.