



KCD4-B0

额定电流、电压

16(8)A 250VAC

15A 250VAC T85

接触电阻: $\leq 50\text{m}\Omega$

绝缘电阻: $\geq 100\text{M}\Omega$

介电强度: $\geq 1500\text{VAC}/5\text{S}$

电气寿命: ≥ 50000 次

Rating:

16(8)A 250VAC

15A 250VAC T85

Contact resistance: $\leq 50\text{m}\Omega$

Insulation resistance: $\geq 100\text{M}\Omega$


Dielectric intensity: $\geq 1500\text{VAC}/5\text{S}$

Life: ≥ 50000 Cycles


序列号

电路图


端子规格

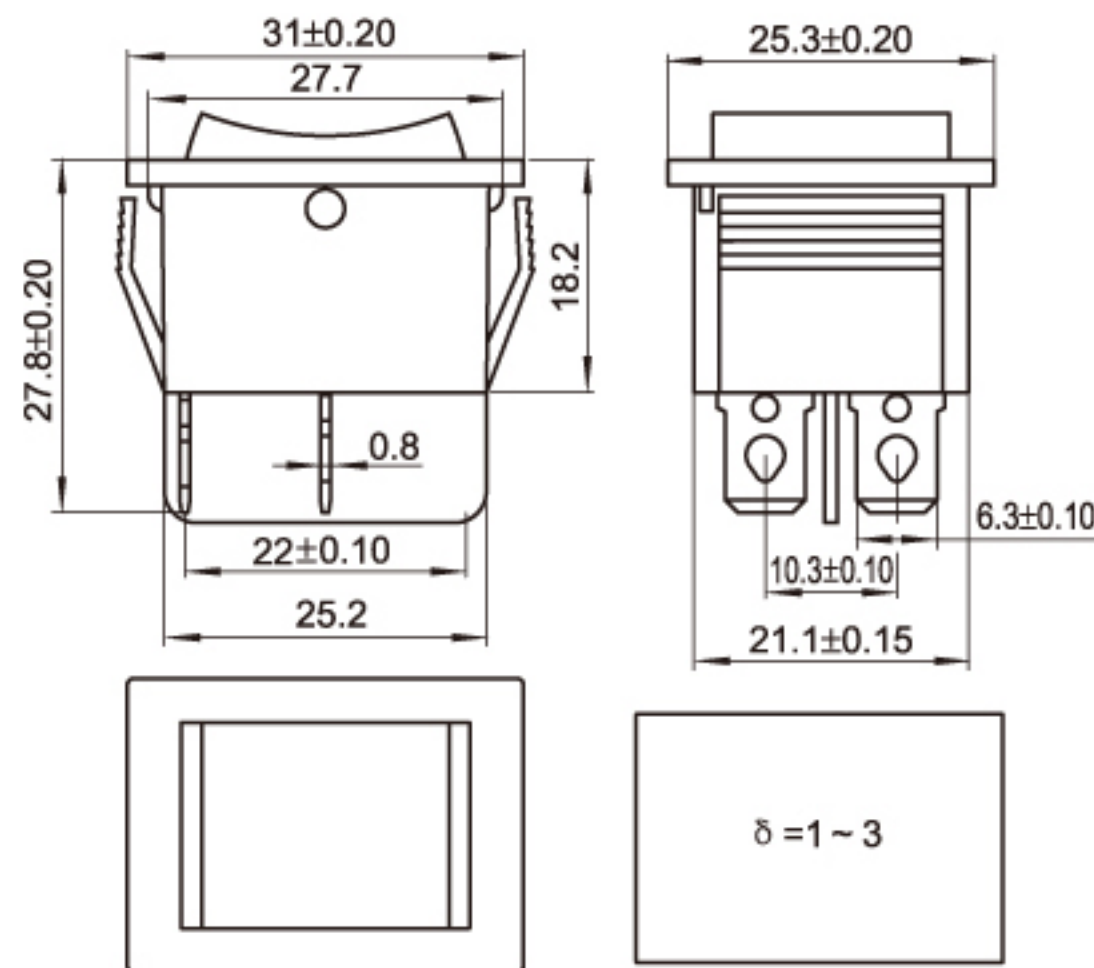


KCD4-B0-201




KCD4-B0-201/N



KCD4-B0-201(FW)



KCD4-B0-202




KCD4-B0-203



KCD4-B0-202/N



6.3X0.8



6.3X0.8

