


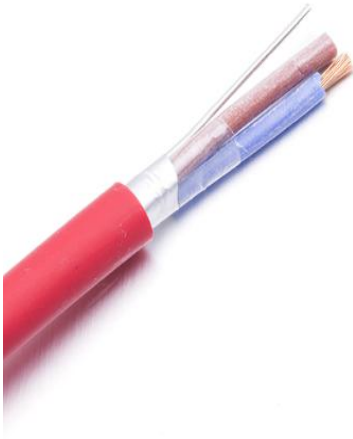

Product Description:

Shielded: Al/polyester foil, coverage> 100%


Specifications:

Reel Length (Meter)	: 500m with wooden drum
Voltage Rating	: 300/500V
Conductor Size	: 2 cores X 1.50mm ²
Conductor Material	: Stranded Bare Copper
Insulation Color	: Brown and Blue
Insulation Material	: silicon rubber
Insulation O.D.	: 2.6mm
Wrap	: PET tape
Drain wire	: 1/0.8mm ² Tinned Copper
Jacket Color	: Red
Jacket Material	: LSZH
Jacket O.D.	: 6.9mm
Standard	: BS6387

Applications:

Fire alarm cables are for use with fire monitoring/detection, power-limited fire alarm systems, smoke detectors, signaling, audio circuits, control circuits, fire protective circuits and security systems.

Cable Construction Diagram

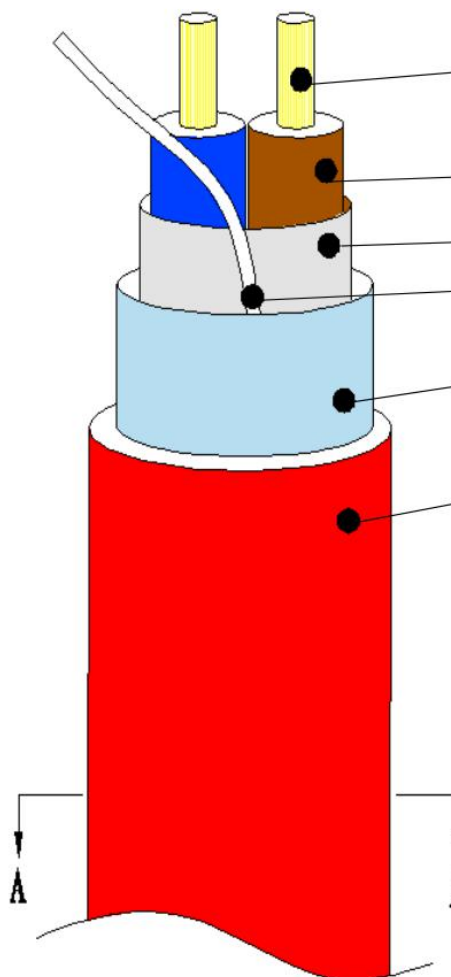

Conductor: 2 core *30*0.24 Bare copper

Insulation: O.D. 2.5mm silicon rubber
Color: Brown, Blue

Wrap: PET tape
Drain wire: 1/0.5mm Tinned copper

Shielding: Aluminum foil/PET

Outer Jacket: O.D. 6.9mm LSZH
Color: Red

